

9/4/94 Noon
9/15/94 House conn.
12/27/95 10:00 house connection

03-315738
PERMIT
SEWAGE DISPOSAL SYSTEM

Hold for 1 week
HOUSE CONNECTION
P 50759 F
A 44700
1 P.C. 507
3 P.C. 0

DEPARTMENT OF HEALTH AND MENTAL HYGIENE

HOWARD COUNTY HEALTH DEPARTMENT

BUREAU OF ENVIRONMENTAL HEALTH

~~461-9933~~ 313-2640

INDEXED

DISTRICT

DATE 6/30/95

DATE SYSTEM APPROVED 12/29/95

INSPECTOR

Jack Fyock septic Service

IS PERMITTED TO INSTALL ☒ ALTER

ADDRESS

PHONE 988-9270

SUBDIVISION Shaw Property

LOT 8

ROAD 638 River Road

PROPERTY OWNER

Richard Quaid / Connelly

ADDRESS

SEPTIC TANK CAPACITY 1250 GALLONS TOP SEAMED TANK

NUMBER OF BEDROOMS 4

210 SQUARE FEET PER BEDROOM

LINEAR FEET OF TRENCH REQUIRED 280

TRENCHES - Trench to be 3 feet wide. Inlet 2 feet below original grade. Bottom maximum depth 3.5 feet below original grade. Effective area begins at 2 feet below original grade. 1.5 feet of stone below distribution pipe.

LOCATION - Place distribution box 110 feet from front lot line and 75 feet from the right lot line as seen when facing property from River Road. Run trenches on contour toward front lot line.

NOTES - No trench to exceed 100 feet in length. Provide 6" - 8" diameter cleanout and cap to grade or above on septic tank. OK MR 9/13/94

PLANS APPROVED BY C. Williams

DATE 09/12/94

COVER NO WORK UNTIL INSPECTED AND APPROVED

NEITHER THE HOWARD COUNTY COUNCIL NOR THE HEALTH DEPARTMENT IS RESPONSIBLE FOR THE SUCCESSFUL OPERATION OF ANY SYSTEM

NOTE: CLEANOUT REQUIRED EVERY 70 FEET OF SEWER LINE AND/OR AT 90° SWEEPS IN LINES FROM HOUSE TO DRAIN FIELDS; 90° ELBOWS NOT ACCEPTABLE.

NOTE: ALL PARTS OF SEPTIC SYSTEMS (I.E. TANK, DISTRIBUTION BOX TRENCHES) TO BE 100 FEET FROM WELL (UNLESS OTHERWISE SPECIFICALLY AUTHORIZED)

NOTE: IF DEEP TRENCH(ES) ARE USED CALL FOR INSPECTION BEFORE AND AFTER PLACING GRAVEL IN TRENCH(ES)

NOTE: NO DRY WELL SHALL EXCEED 15 FOOT IN DIAMETER NO ABSORPTION TRENCH TO EXCEED 100 FEET IN LENGTH

NOTE: ALL PIPE FROM HOUSE TO SEPTIC TANK MUST BE CAST IRON OR SCHEDULE 35/40 PVC OR ABS

PERMIT VOID AFTER TWO YEARS

NOTE: INSTALL STAND PIPE ON SEPTIC TANK AND DRY WELL STAND PIPES MUST BE 6 INCHES IN DIAMETER CAST IRON. CONCRETE OR TERRA COTTA OR PVA OR ABS ACCEPTED. IF TOP OF SEPTIC TANK IS DEEPER THAN 3 FEET. MANHOLE TO GRADE REQUIRED.

NOTE: DISTRIBUTION BOXES MUST HAVE BAFFLES

*INSTALLER IS RESPONSIBLE FOR OBTAINING FINAL APPROVAL ON THIS PERMIT


HD-260(6-90)

*CALL 461-9933 FOR INSPECTION OF SEPTIC SYSTEM.

BUILDING PERMIT SIGNED
AND RETURNED

2-3-03-16 POUL

A 44700

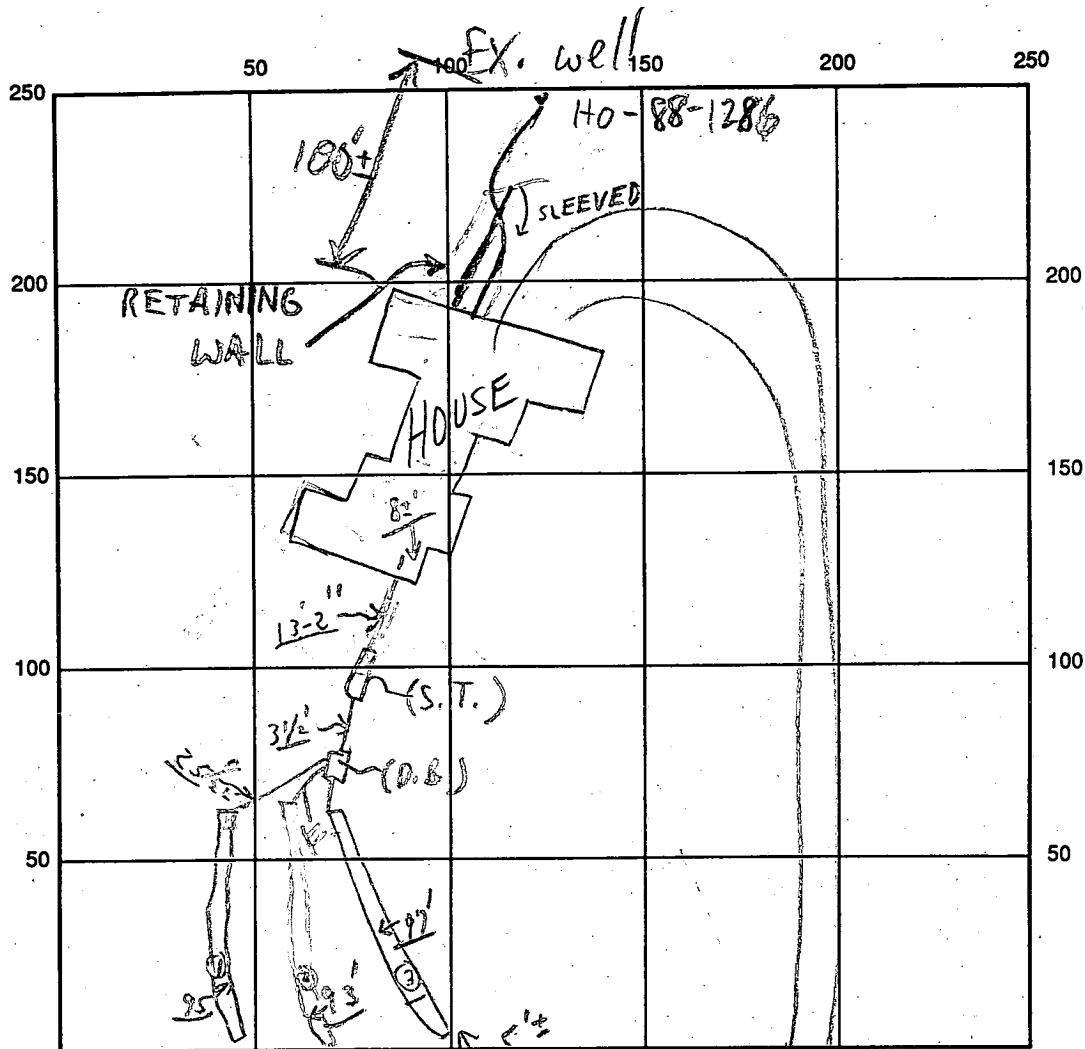

RIVER RD

INDICATE NORTH - NAME ADJOINING ROADWAY AS BASELINE

SEPTIC TANK LEVEL TOP SEAM - OK

CLEANOUTS (Mainline + 1/2" offset)

DISTRIBUTION BOX LEVEL OK

(Baffle in)

DRAIN FIELD/TITLE DEPTH 3.5 FT.

TRENCH WIDTH 3 FT.

INLET DEPTH 2 FT.

EFFECTIVE GRAVEL DEPTH 1 1/2 FT.

{ 0' 95"; 0' 93"; 0' 97" } (285)

NUMBER OF TRENCHES 3

ONE SIDEWALL BOTTOM AREA 855 SQ. FT.

DRYWALL INSIDE DIAMETER — FT.

EFFECTIVE DEPTH BELOW INLET — FT.

ABSORBENT AREA 855⁺ SQ. FT.

REMARKS: 9/13/94 S.T. & D.B. SET, NO OTHER WORK MR

8/14/94 10:30 AM ok to continue on work; cut 2 trenches - only
 to cover; cut 9/17/94 Late P.M. - Partial no house
 connection; 9/14/94 Later - Final except house
 connection & C.O. @ S.T. ok to cover as finish cut
 9/14 No W.P.I. cut NEEDS HOUSE CONNECTION YET

DATE SYSTEM APPROVED 1/194

INSPECTOR —



(open front & above)

GENERAL NOTES


1. Existing topography was field run by TRACY, SCHULTE & ASSOCIATES INC. on June 27, 1989.
2. Reference record plat number 2180
3. Length of trenches to be determined at time of permit issuance.

LEGEND

Contour Interval
Existing Contour
Proposed Contour
Spot Elevation
Direction of Drainage
Walkout Basement

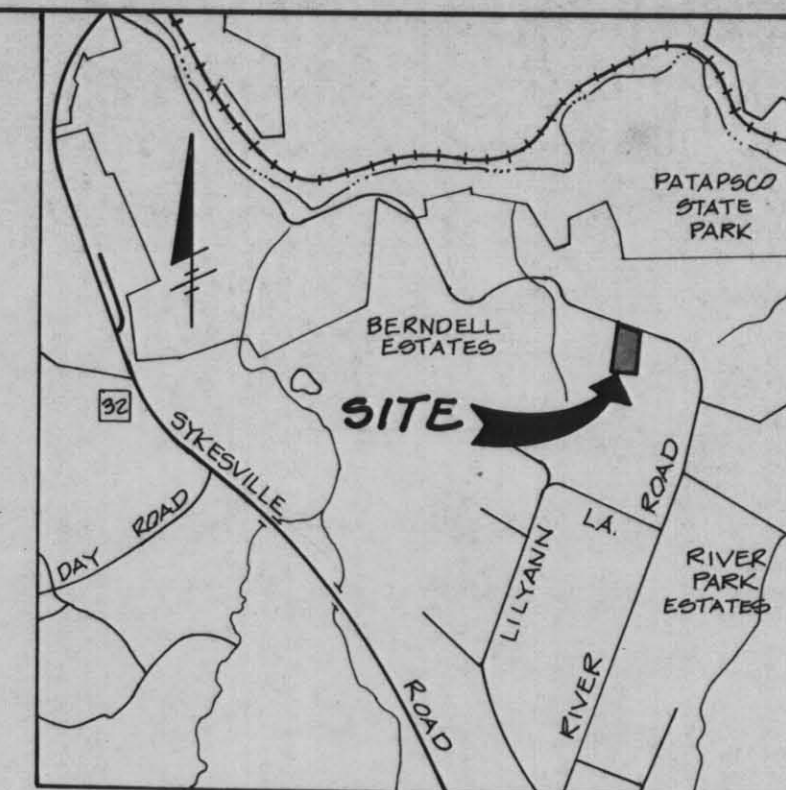

VICINITY MAP
SCALE: 1" = 2000'

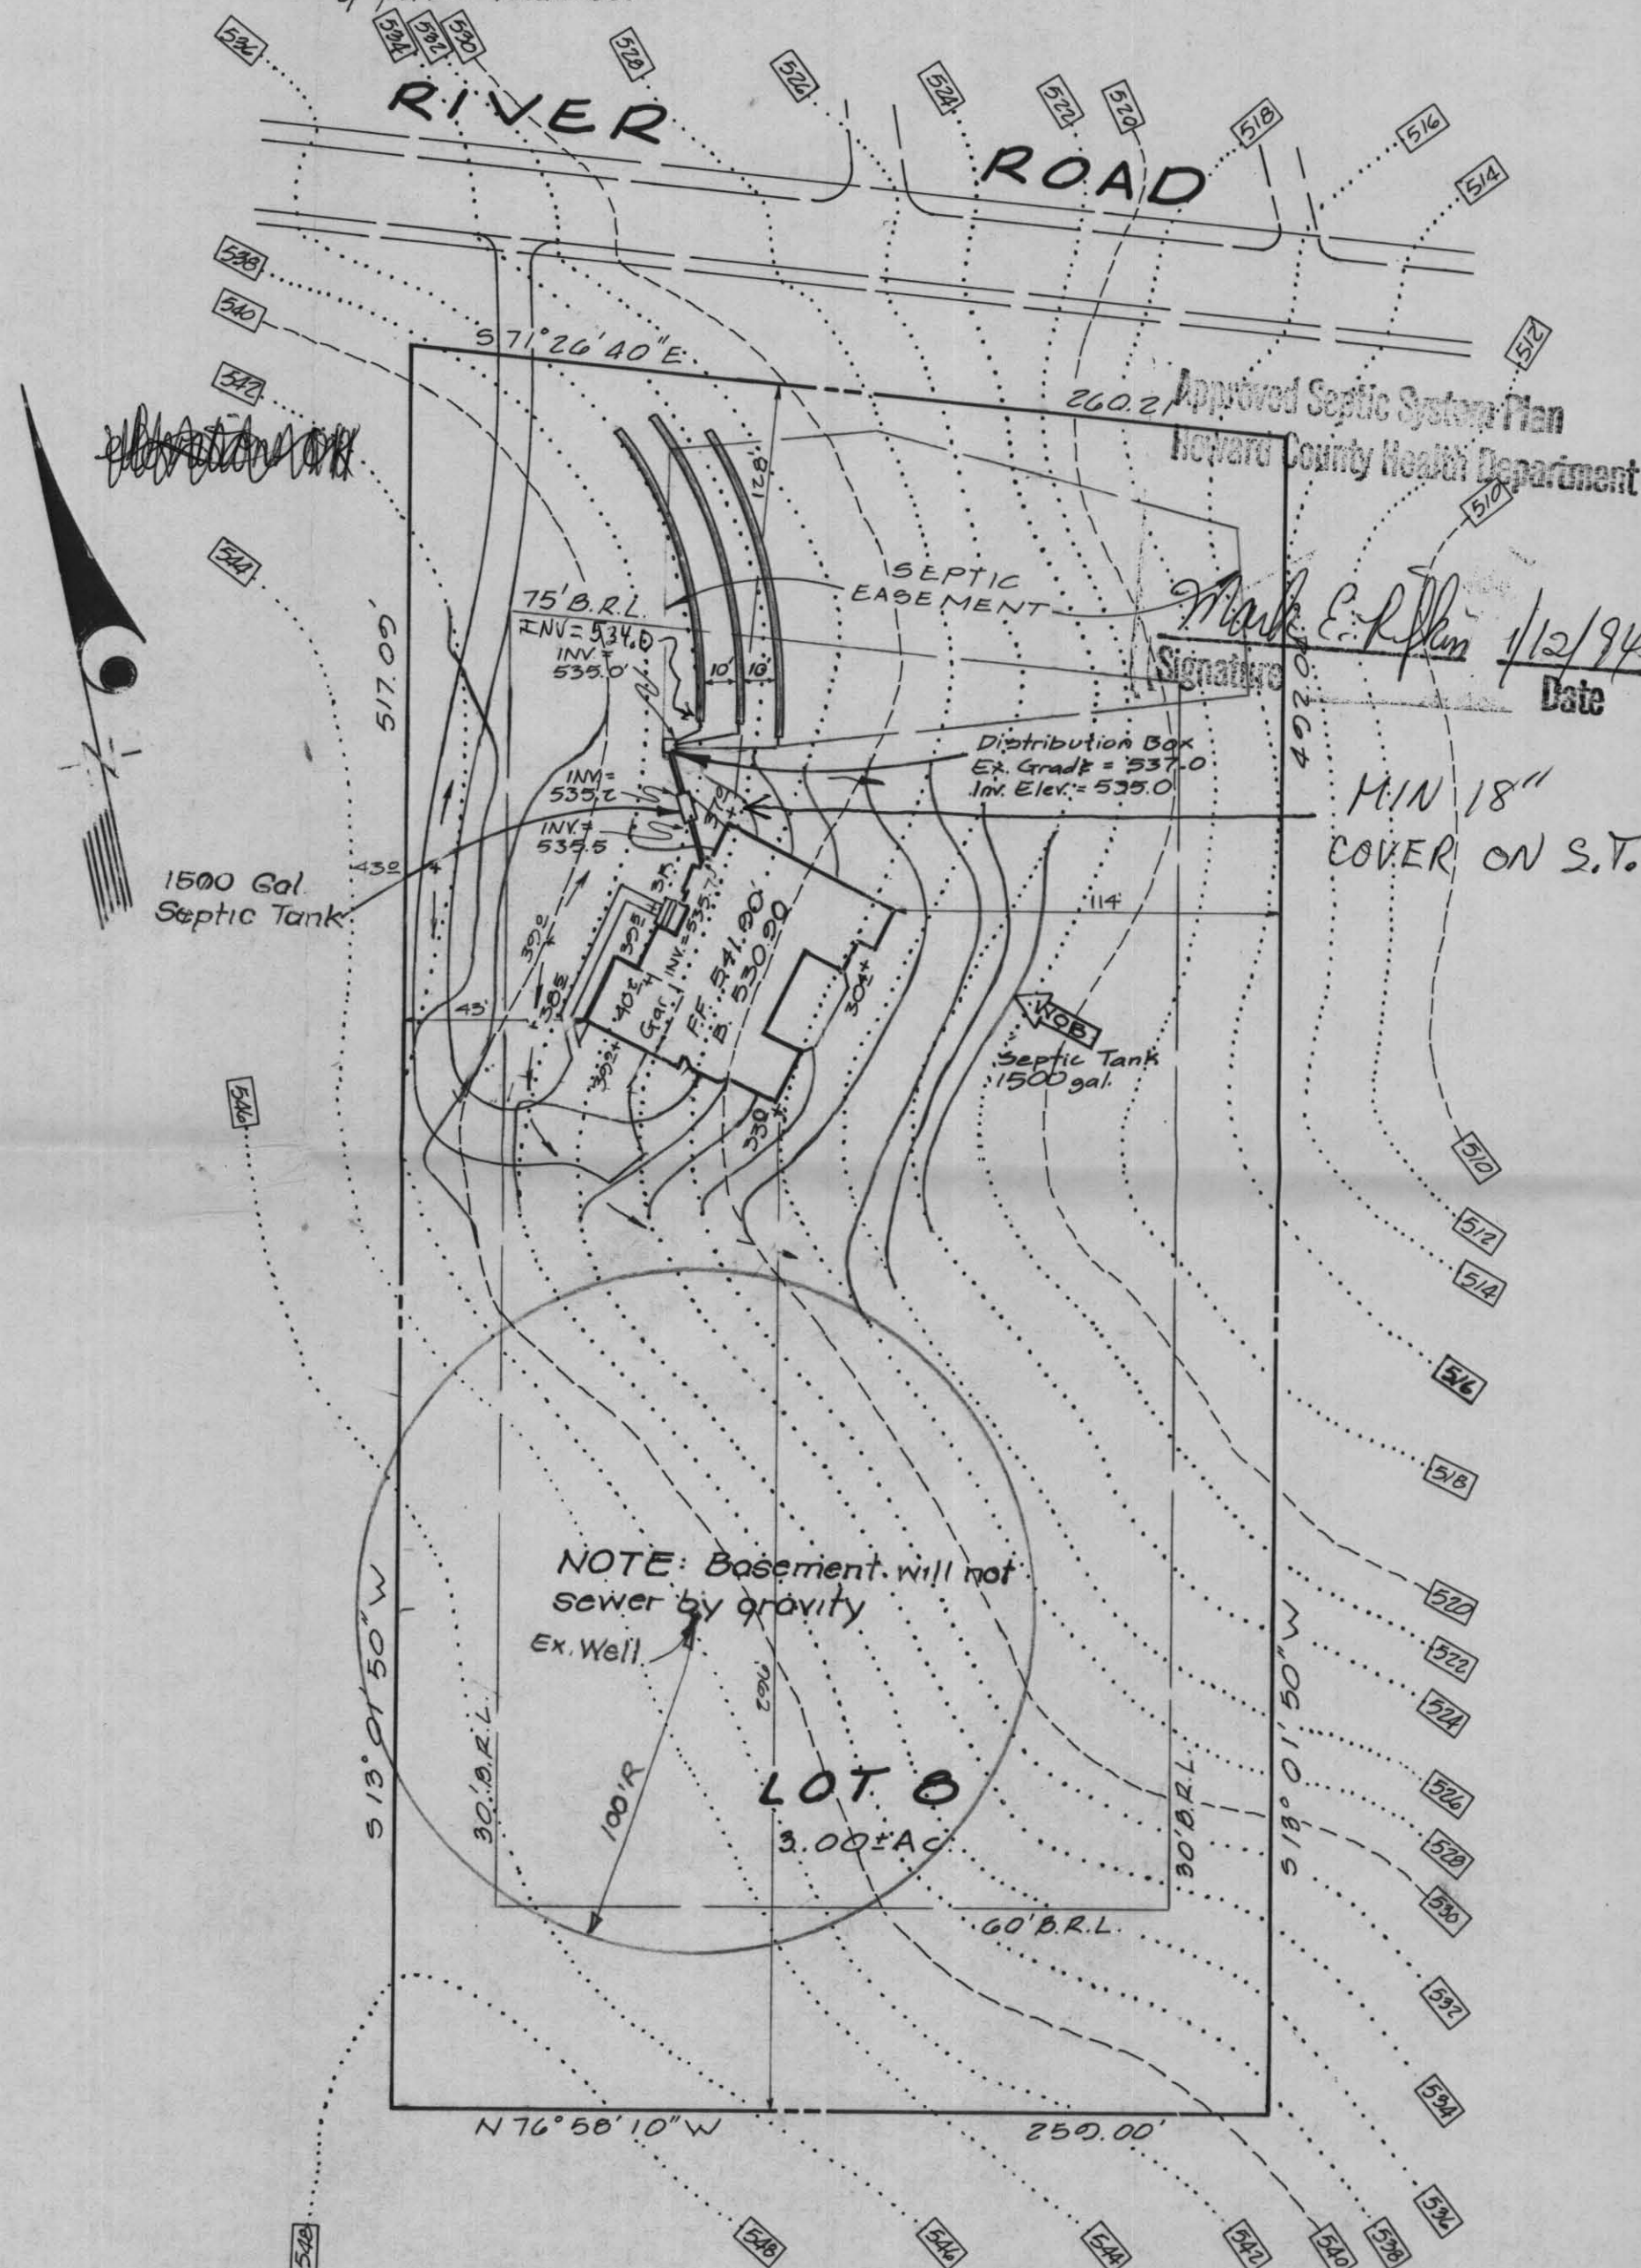

Approved Septic System Plan
Howard County Health Department
Signature: Mark E. R. [Signature] 1/12/94
Date

MIN 18"
COVER ON S.T.

NOTE: Basement will not
sewer by gravity
Ex. Well

LOT B
3.00± AC

FILE COPY


CLARK • FINEFROCK & SACKETT, INC. ENGINEERS • PLANNERS • SURVEYORS 7135 MINSTREL WAY • COLUMBIA, MD. 21045 • (410) 381-7500 - BALTO. • (301) 621-8100 - WASH.		
DESIGNED JME	SITE DEVELOPMENT PLAN LOT B PROPERTY OF TOM SHAW JR., et.al. 3RD ELECTION DISTRICT HOWARD COUNTY MARYLAND	SCALE 1" = 50'
DRAWN CAF		DRAWING 1 OF 1
CHECKED JME		JOB NO. 23-170
DATE 2-3-93		FILE NO. 23-170X
FOR MS. GERALDINE F. McQUAID CONNELLY 11 UNIVERSITY AVENUE BALTIMORE, MARYLAND 21228		

GENERAL NOTES

- Existing topography was field run by TRACY, SCHULTE & ASSOCIATES INC. on June 27, 1989.
- Reference record plat number 2180
- Length of trenches to be determined at time of permit issuance.

LEGEND

Contour Interval
Existing Contour
Proposed Contour
Spot Elevation
Direction of Drainage
Walkout Basement



Approved Septic System Plan
Howard County Health Department

Signature: *Mark C. Liffman*
Date: 1/12/94

18" MIN.
COVER ON S.T.

1500 Gal.
Septic Tank


NOTE: Basement will not
sewer by gravity
Ex. Well

LOT 8
3.00± AC

Approved Septic System Plan
Howard County Health Department

Signature: *[Signature]*
Date: 1/12/94

Signature: *[Signature]*
Date: 1/12/94

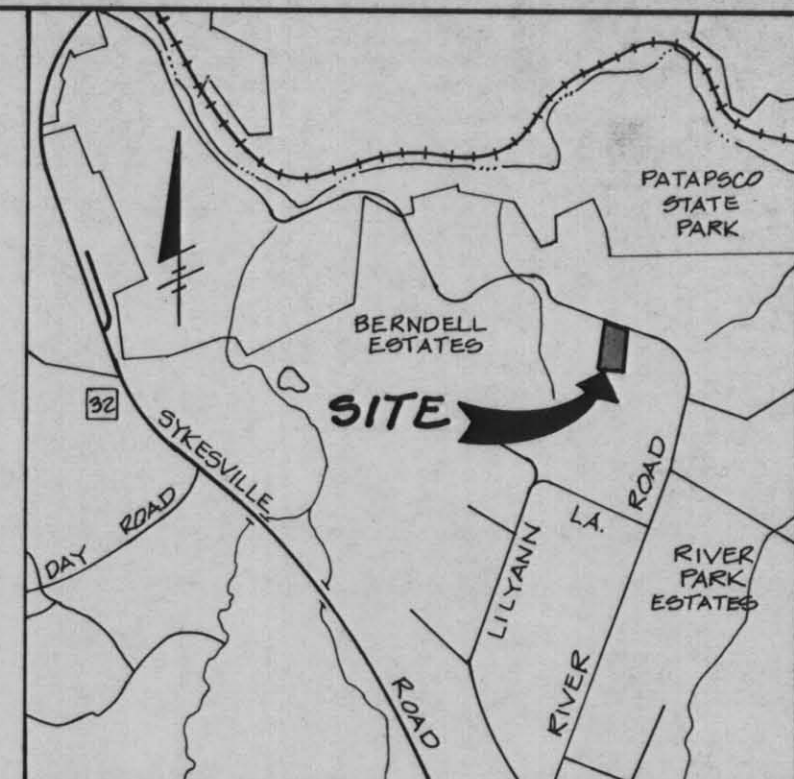

VICINITY MAP
SCALE: 1" = 2000'

INSTALLER'S COPY

CLARK • FINEFROCK & SACKETT, INC. ENGINEERS • PLANNERS • SURVEYORS 7135 MINSTREL WAY • COLUMBIA, MD 21045 • (410) 381-7500 - BALTO. • (301) 621-8100 - WASH.		
DESIGNED JME	SITE DEVELOPMENT PLAN LOT 8 PROPERTY OF TOM SHAW JR., et.al. 3RD ELECTION DISTRICT HOWARD COUNTY MARYLAND	SCALE 1" = 50'
DRAWN CAF		DRAWING 1 OF 1
CHECKED JME		JOB NO. 93-170
DATE 9-3-93		FILE NO. 93-170X
FOR MS. GERALDINE F. McQUAID CONNELLY 11 UNIVERSITY AVENUE BALTIMORE, MARYLAND 21228		

NOTES

1. * DENOTES 3/8" X 30" PIPE OR STEEL MARKER FOUND.
2. COORDINATES SHOWN HEREON ARE ASSUMED, TAKEN FROM PLAT NO. 4434.
3. B. R. L. INDICATES BUILDING RESTRICTION LINE.
4. FLAG OR PIPE STEM LOTS SHALL NOT BE FURTHER SUBDIVIDED INTO LOTS ACCOMMODATING ADDITIONAL RESIDENCES UNLESS A PUBLIC ROAD CAN BE CONSTRUCTED ACCORDING TO COUNTY STANDARDS ON A MINIMUM FIFTY (50) FOOT RIGHT-OF-WAY TO BE DECEDED TO THE COUNTY.
5. LOTS SHOWN ON THIS PLAT SHALL COMPLY WITH THE MINIMUM OWNERSHIP WIDTH AND LOT AREAS AS REQUIRED BY THE MARYLAND STATE DEPARTMENT OF HEALTH REGULATIONS.
6. THIS AREA DESIGNATES A PRIVATE SEWAGE EASEMENT OF 10,000 SQUARE FEET AS REQUIRED BY THE MARYLAND STATE DEPARTMENT OF HEALTH AND MENTAL HYGIENE FOR INDIVIDUAL SEWAGE DISPOSAL IMPROVEMENTS OF ANY NATURE IN THIS AREA ARE RESTRICTED UNTIL PUBLIC SEWAGE IS AVAILABLE. THESE EASEMENTS SHALL BECOME NULL AND VOID UPON CONNECTION TO A PUBLIC SEWAGE SYSTEM. THE COUNTY HEALTH OFFICER SHALL HAVE THE AUTHORITY TO GRANT VARIANCES FOR ENCRUSTMENT INTO THE PRIVATE SEWAGE EASEMENT RECORDATION OF A MODIFIED SEWAGE EASEMENT SHALL NOT BE NECESSARY.
7. WP-90-06 GRANTED 9-21-89, WAIVER OF SKETCH PRELIMINARY AND ROAD FRONTAGE IMPROVEMENTS. HOWEVER THE OWNER TO PROVIDE A FEE IN LIEU OF FOR THE ROAD FRONTAGE IMPROVEMENTS TO THE PORTION OF LOT 6.

ASSUMED COORDINATE LIST

No.	NORTHING	EASTING
1001	4968.9500	4895.1400
1002	4324.8897	5377.5192
1003	4804.3558	5488.4588
1005	4436.3951	4896.1391
1011	4887.1595	5241.7797
1012	4363.3856	5123.1918

LOT TABULATION (ACRES)

LOTS	GROSS AREA	100-YEAR FLOODPLAIN	FLAGSTEM	25% STEEP SLOPES	NET AREA
7	3.00	-----	-----	-----	3.00
8	3.00	-----	-----	-----	3.00

TOTAL TABULATION THIS PLAT

TOTAL NUMBER OF LOTS TO BE RECORDED	2	(BUL/DABLE)	0	(OPEN SPACE)
TOTAL AREA OF LOTS TO BE RECORDED	6	Ac. (BUL/DABLE)	0	Ac. (OPEN SPACE)
TOTAL AREA OF ROADWAY TO BE RECORDED	0	Ac.		
TOTAL AREA OF THIS PLAT TO BE RECORDED	6	Ac.		

APPROVED: FOR PRIVATE WATER AND PRIVATE SEWER SYSTEMS, HOWARD COUNTY HEALTH DEPT.

Joseph J. Ford
COUNTY HEALTH OFFICER
DATE: 1-30-90

APPROVED: HOWARD COUNTY DEPT. OF PLANNING AND ZONING

Wesley
DIRECTOR
DATE: 2-20-90

APPROVED: FOR STORM DRAINAGE SYSTEMS, PUBLIC ROADS, HOWARD COUNTY DEPARTMENT OF PUBLIC WORKS.

James G. Rasch
DIRECTOR
DATE: 2-16-90

SURVEYOR'S CERTIFICATE

I HEREBY CERTIFY THAT THE FINAL PLAT SHOWN HEREON IS CORRECT; THAT IT IS ALL OF THE LAND OBTAINED BY TOM SHAW JR. BY DEED DATED SEPTEMBER 14, 1989 AND RECORDED IN LHM# 1854 AT FOLIO 152 IN THE LAND RECORDS OF HOWARD COUNTY, MARYLAND, AND THAT ALL WORKMENTS ARE IN PLACE, OR WILL BE IN PLACE PRIOR TO ACCEPTANCE OF THE STREETS IN THE SUBDIVISION BY HOWARD COUNTY, AS SHOWN IN ACCORDANCE WITH THE ANNOTATED CODE OF MARYLAND, AS AMENDED.

William G. Rasch
WILLIAM G. RASCH
TRACY, SCHULTE & ASSOCIATES, INC.
8400 BALTIMORE NATIONAL PIKE, SUITE 418
ELLCOTT CITY, MARYLAND 21043
DATE: 9/20/89

OWNER'S DEDICATION

TOM SHAW JR.
JOSEPH S. LAMER
I (WE), LAMER & SHAW, OWNER OF THE PROPERTY SHOWN AND DESCRIBED HEREON ADOPT THIS PLAN OF SUBDIVISION, AND IN CONSIDERATION OF THE APPROVAL OF THIS FINAL PLAT BY THE OFFICE OF PLANNING AND ZONING, ESTABLISH THE FOLLOWING BUILDING RESTRICTION LINES AND GRANT UNTO HOWARD COUNTY, MARYLAND, ITS SUCCESSORS AND ASSIGNS:
(1) THE RIGHT TO LAY, CONSTRUCT AND MAINTAIN SEWERS, DRAINS, WATER PIPES, AND OTHER MUNICIPAL UTILITIES AND SERVICES, IN AND UNDER ALL ROADS AND STREETS RIGHT-OF-WAYS AND THE SPECIFIC EASEMENT AREAS SHOWN HEREON;
(2) THE RIGHT TO REQUIRE DEDICATION FOR PUBLIC USE THE BEDS OF THE STREETS AND/OR ROADS, FLOODPLAIN AND OPEN SPACE WHERE APPLICABLE, AND FOR DOGS AND OTHER VALUABLE CONSIDERATION HEREBY GRANT THE RIGHT AND OPTION TO HOWARD COUNTY TO ACQUIRE THE FEE SIMPLE TITLE TO THE BEDS OF THE STREETS AND/OR ROADS AND FLOODPLAINS, STORM DRAINAGE FACILITIES AND OPEN SPACE WHERE APPLICABLE; (3) THE RIGHT TO REQUIRE DEDICATION OF WATERWAYS AND DRAINAGE EASEMENTS FOR THE SPECIFIC PURPOSE OF THEIR CONSTRUCTION, REPAIR AND MAINTENANCE; AND (4) THAT NO BUILDING OR SIMILAR STRUCTURE OF ANY KIND SHALL BE ERRECTED ON OR OVER THE SAID EASEMENTS AND RIGHT-OF-WAY. WITNESS OUR HANDS THIS 21ST DAY OF SEPTEMBER, 1989.



Tom Shaw Jr.
TOM SHAW JR.
DATE: 9/20/89
WITNESS: *James B. Shale*

Robert J. Zemanick
WITNESS


RECORDED AS PLAT 9/80
ON 2-26-90 AMONG THE LAND RECORDS OF HOWARD COUNTY, MARYLAND



PROPERTY OF TOM SHAW JR., et al

LOTS 7 AND 8
A RESUBDIVISION OF LOT 6
PROPERTY OF MARIE VAN BRETZEL et al
PLAT NO. 4434
PARCEL NO. 163
TAX MAP NO. 4
SHEET 1 OF 1
3RD ELECTION DISTRICT OF HOWARD COUNTY, MARYLAND
SCALE: 1" = 50'
DATE: 11-27-88

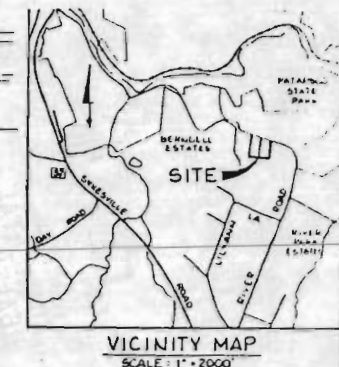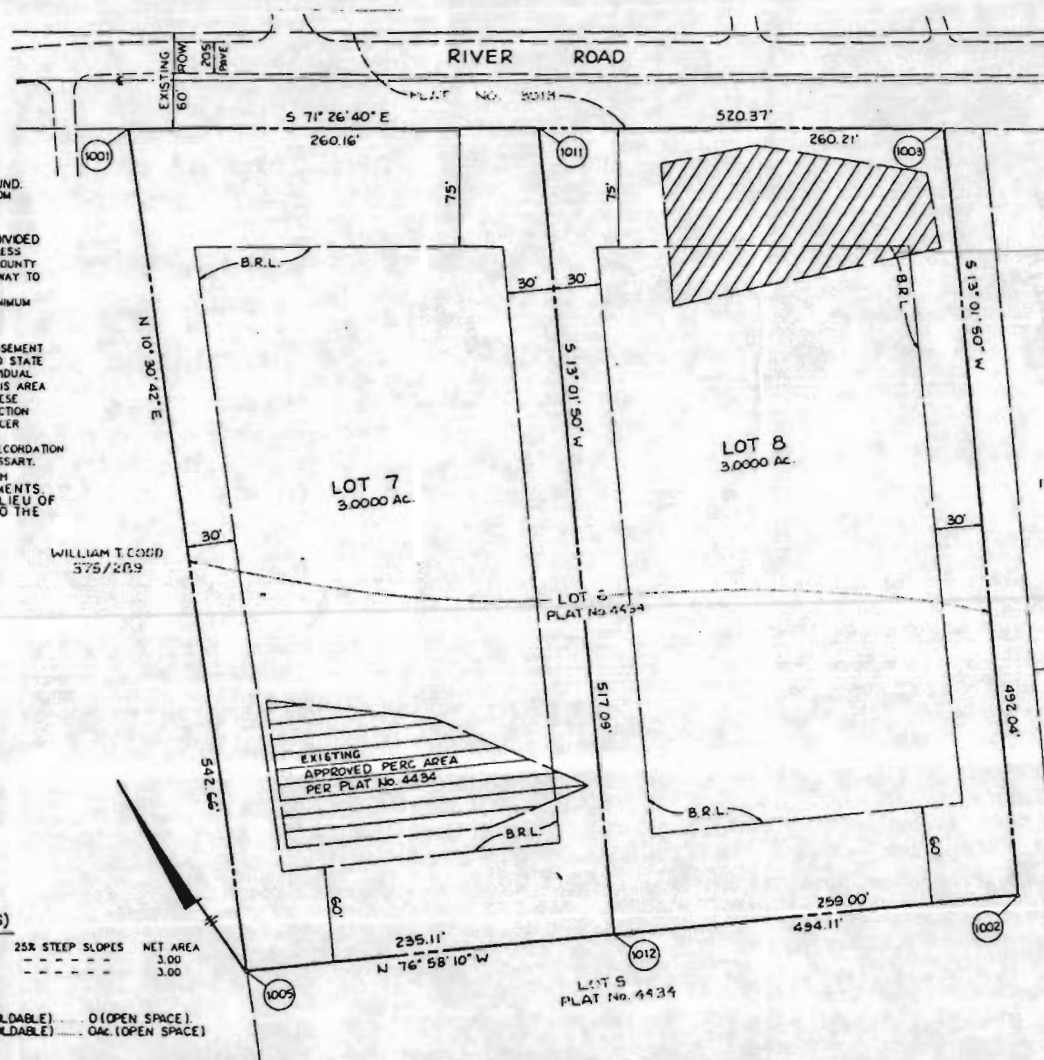

LOT 7
PLAT NO. 4434
LOT 8
PLAT NO. 4434
OWNER: TOM SHAW JR., et al
5804 RICHARDSON MEWS SQUARE
BALTIMORE, MARYLAND
TRACY, SCHULTE & ASSOCIATES, INC.
8400 BALTIMORE NATIONAL PIKE, SUITE 418
ELLCOTT CITY, MARYLAND 21043
(301) 465-6105

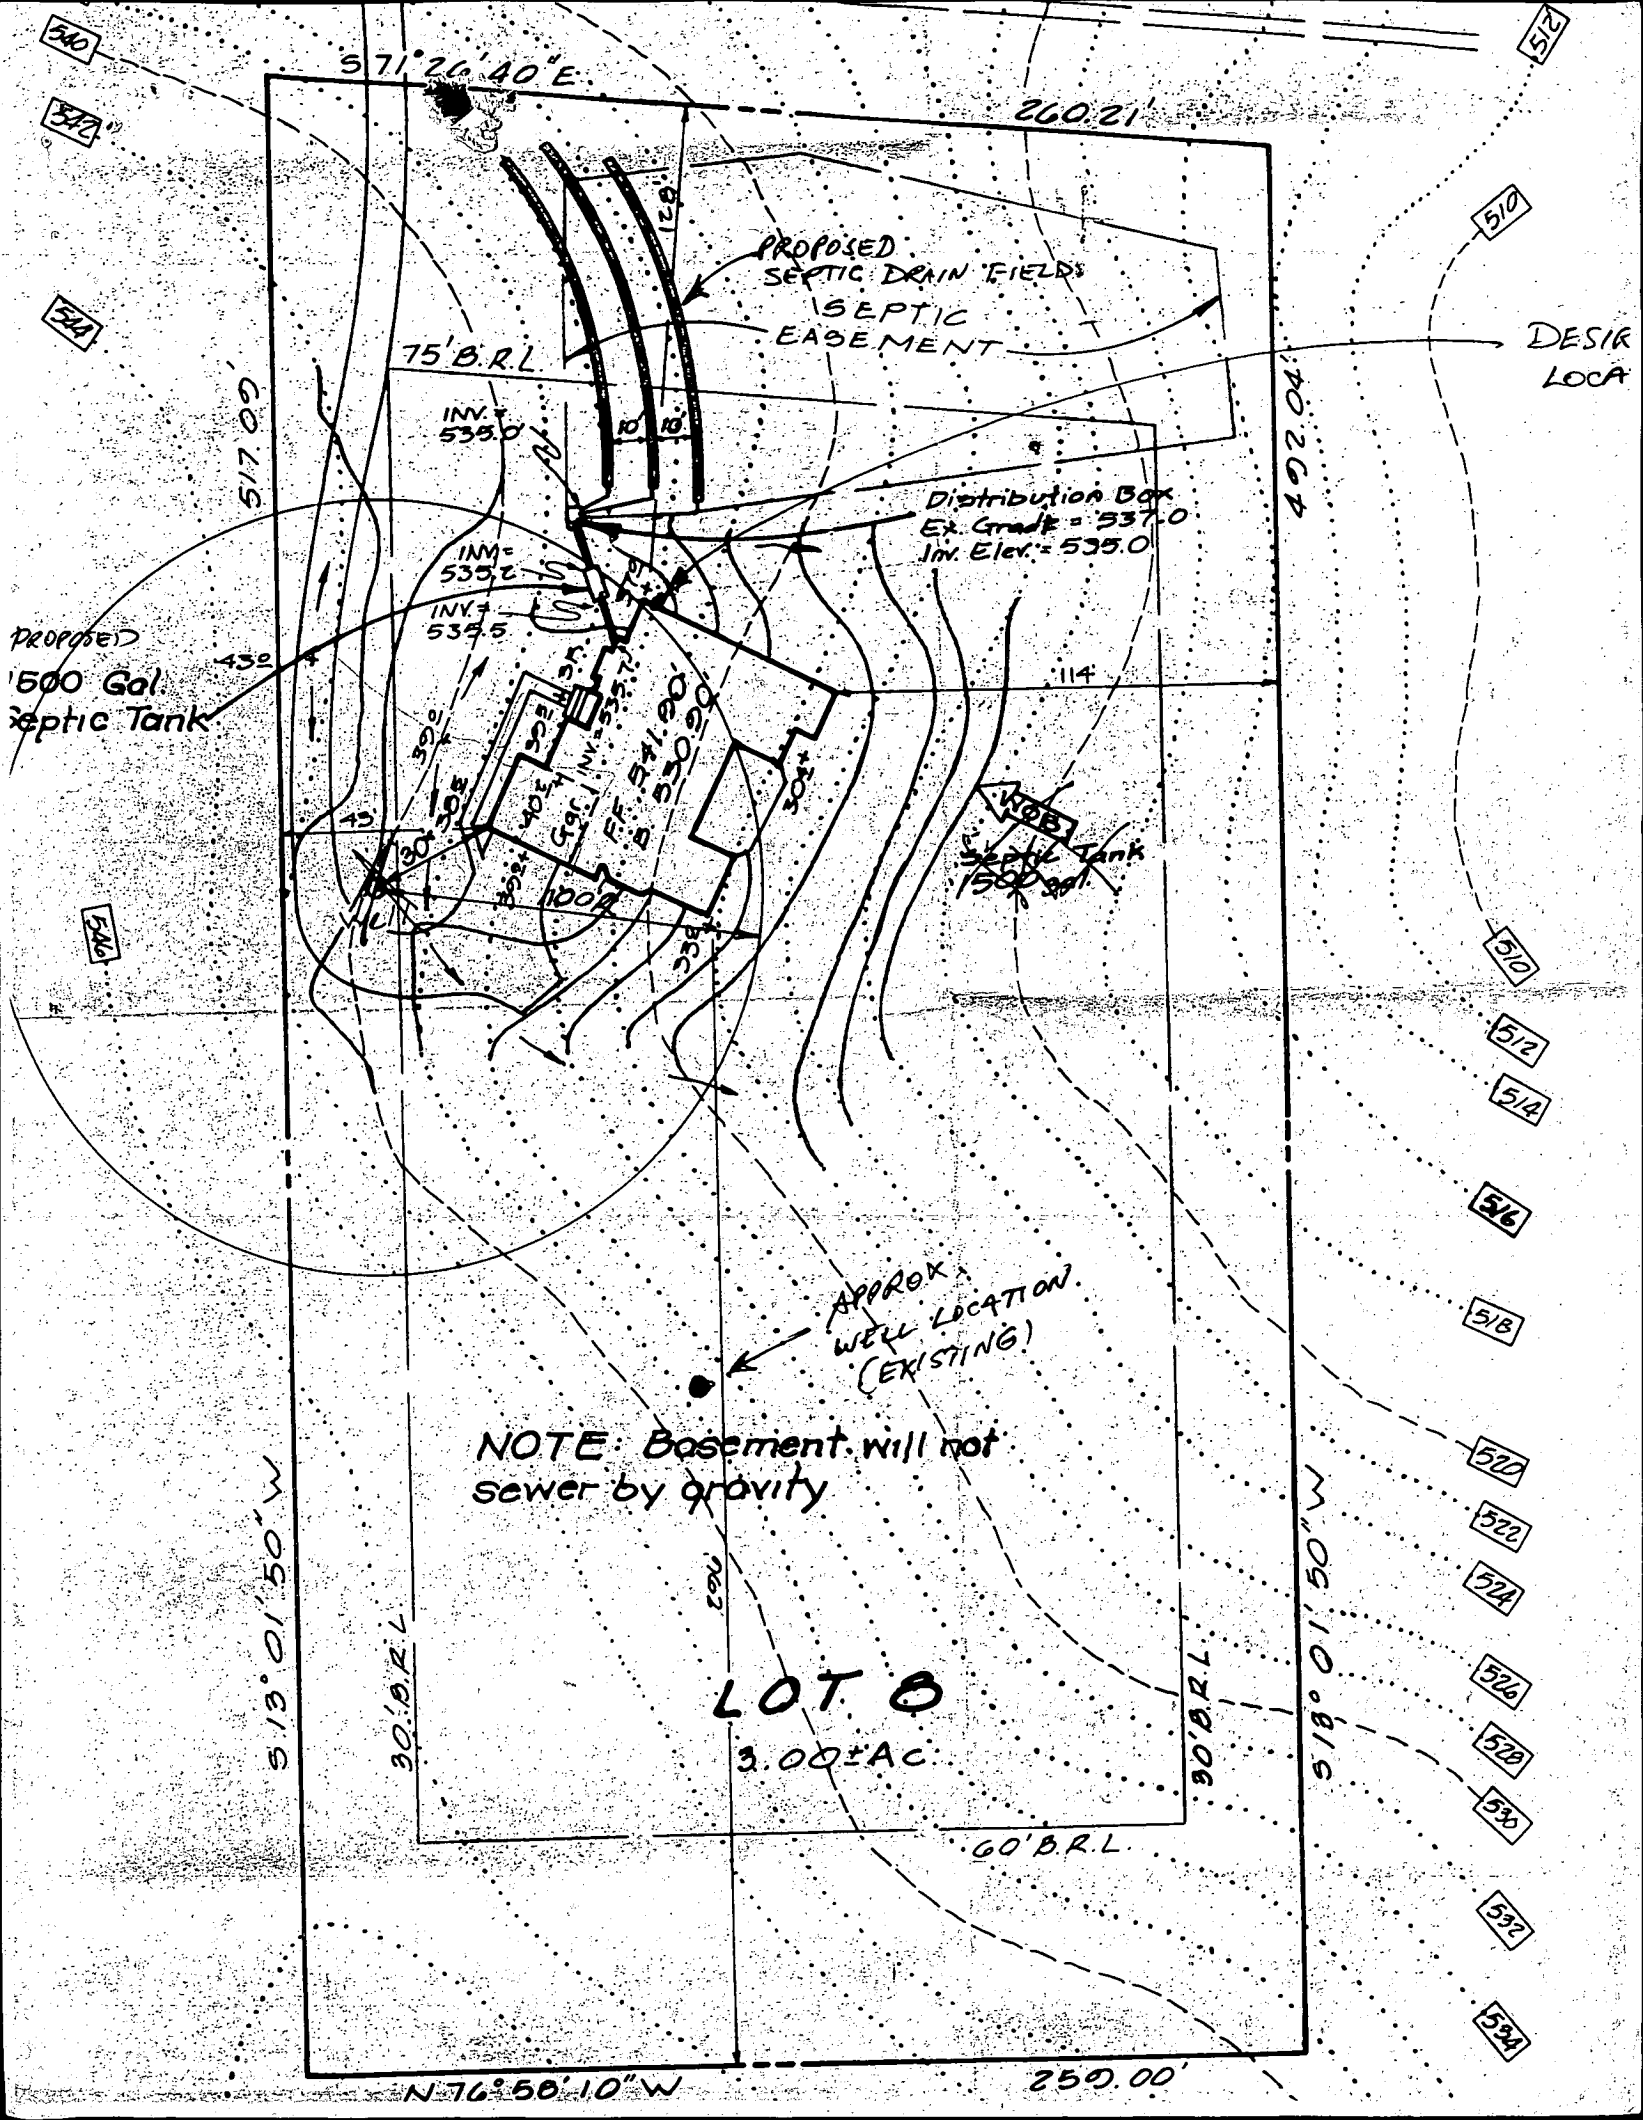

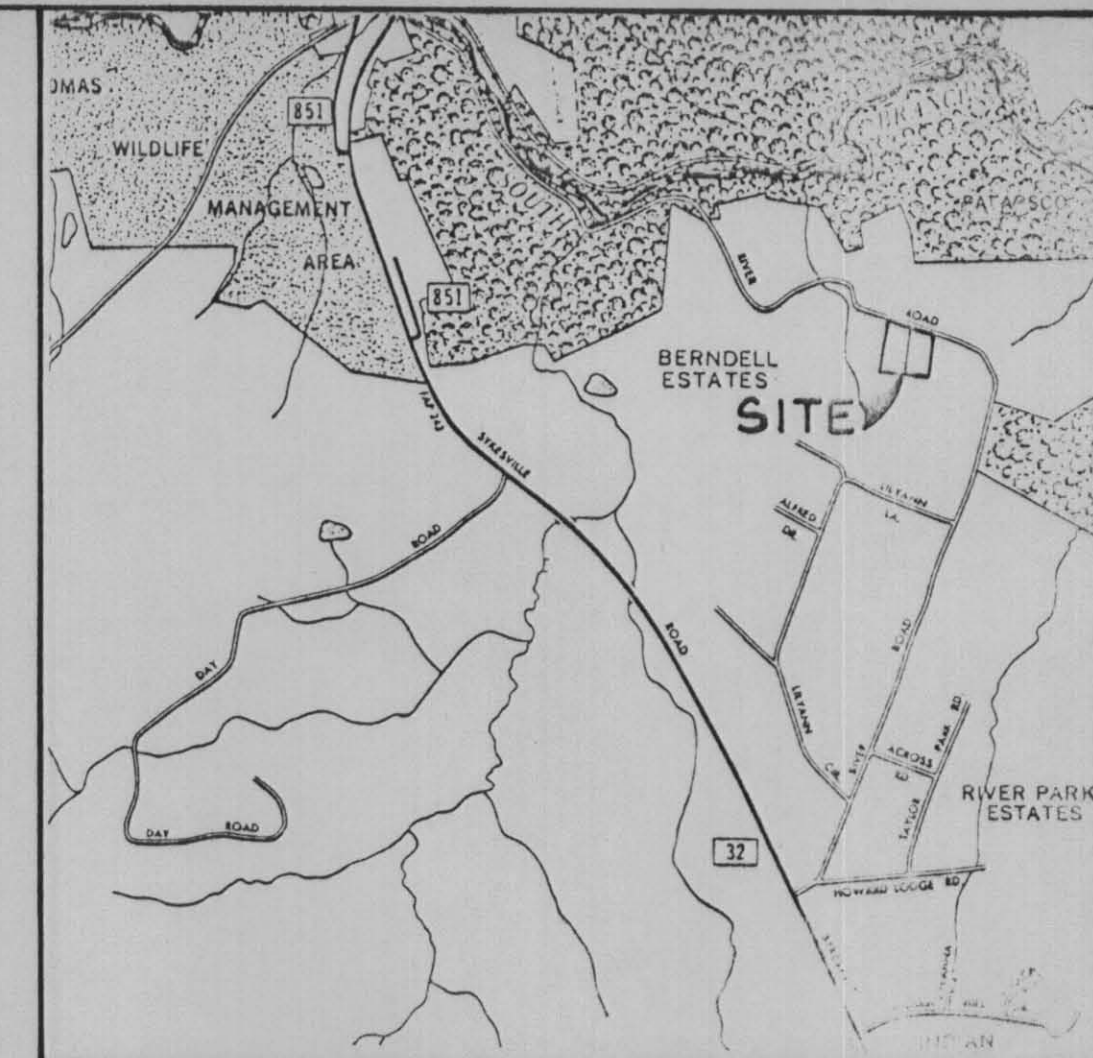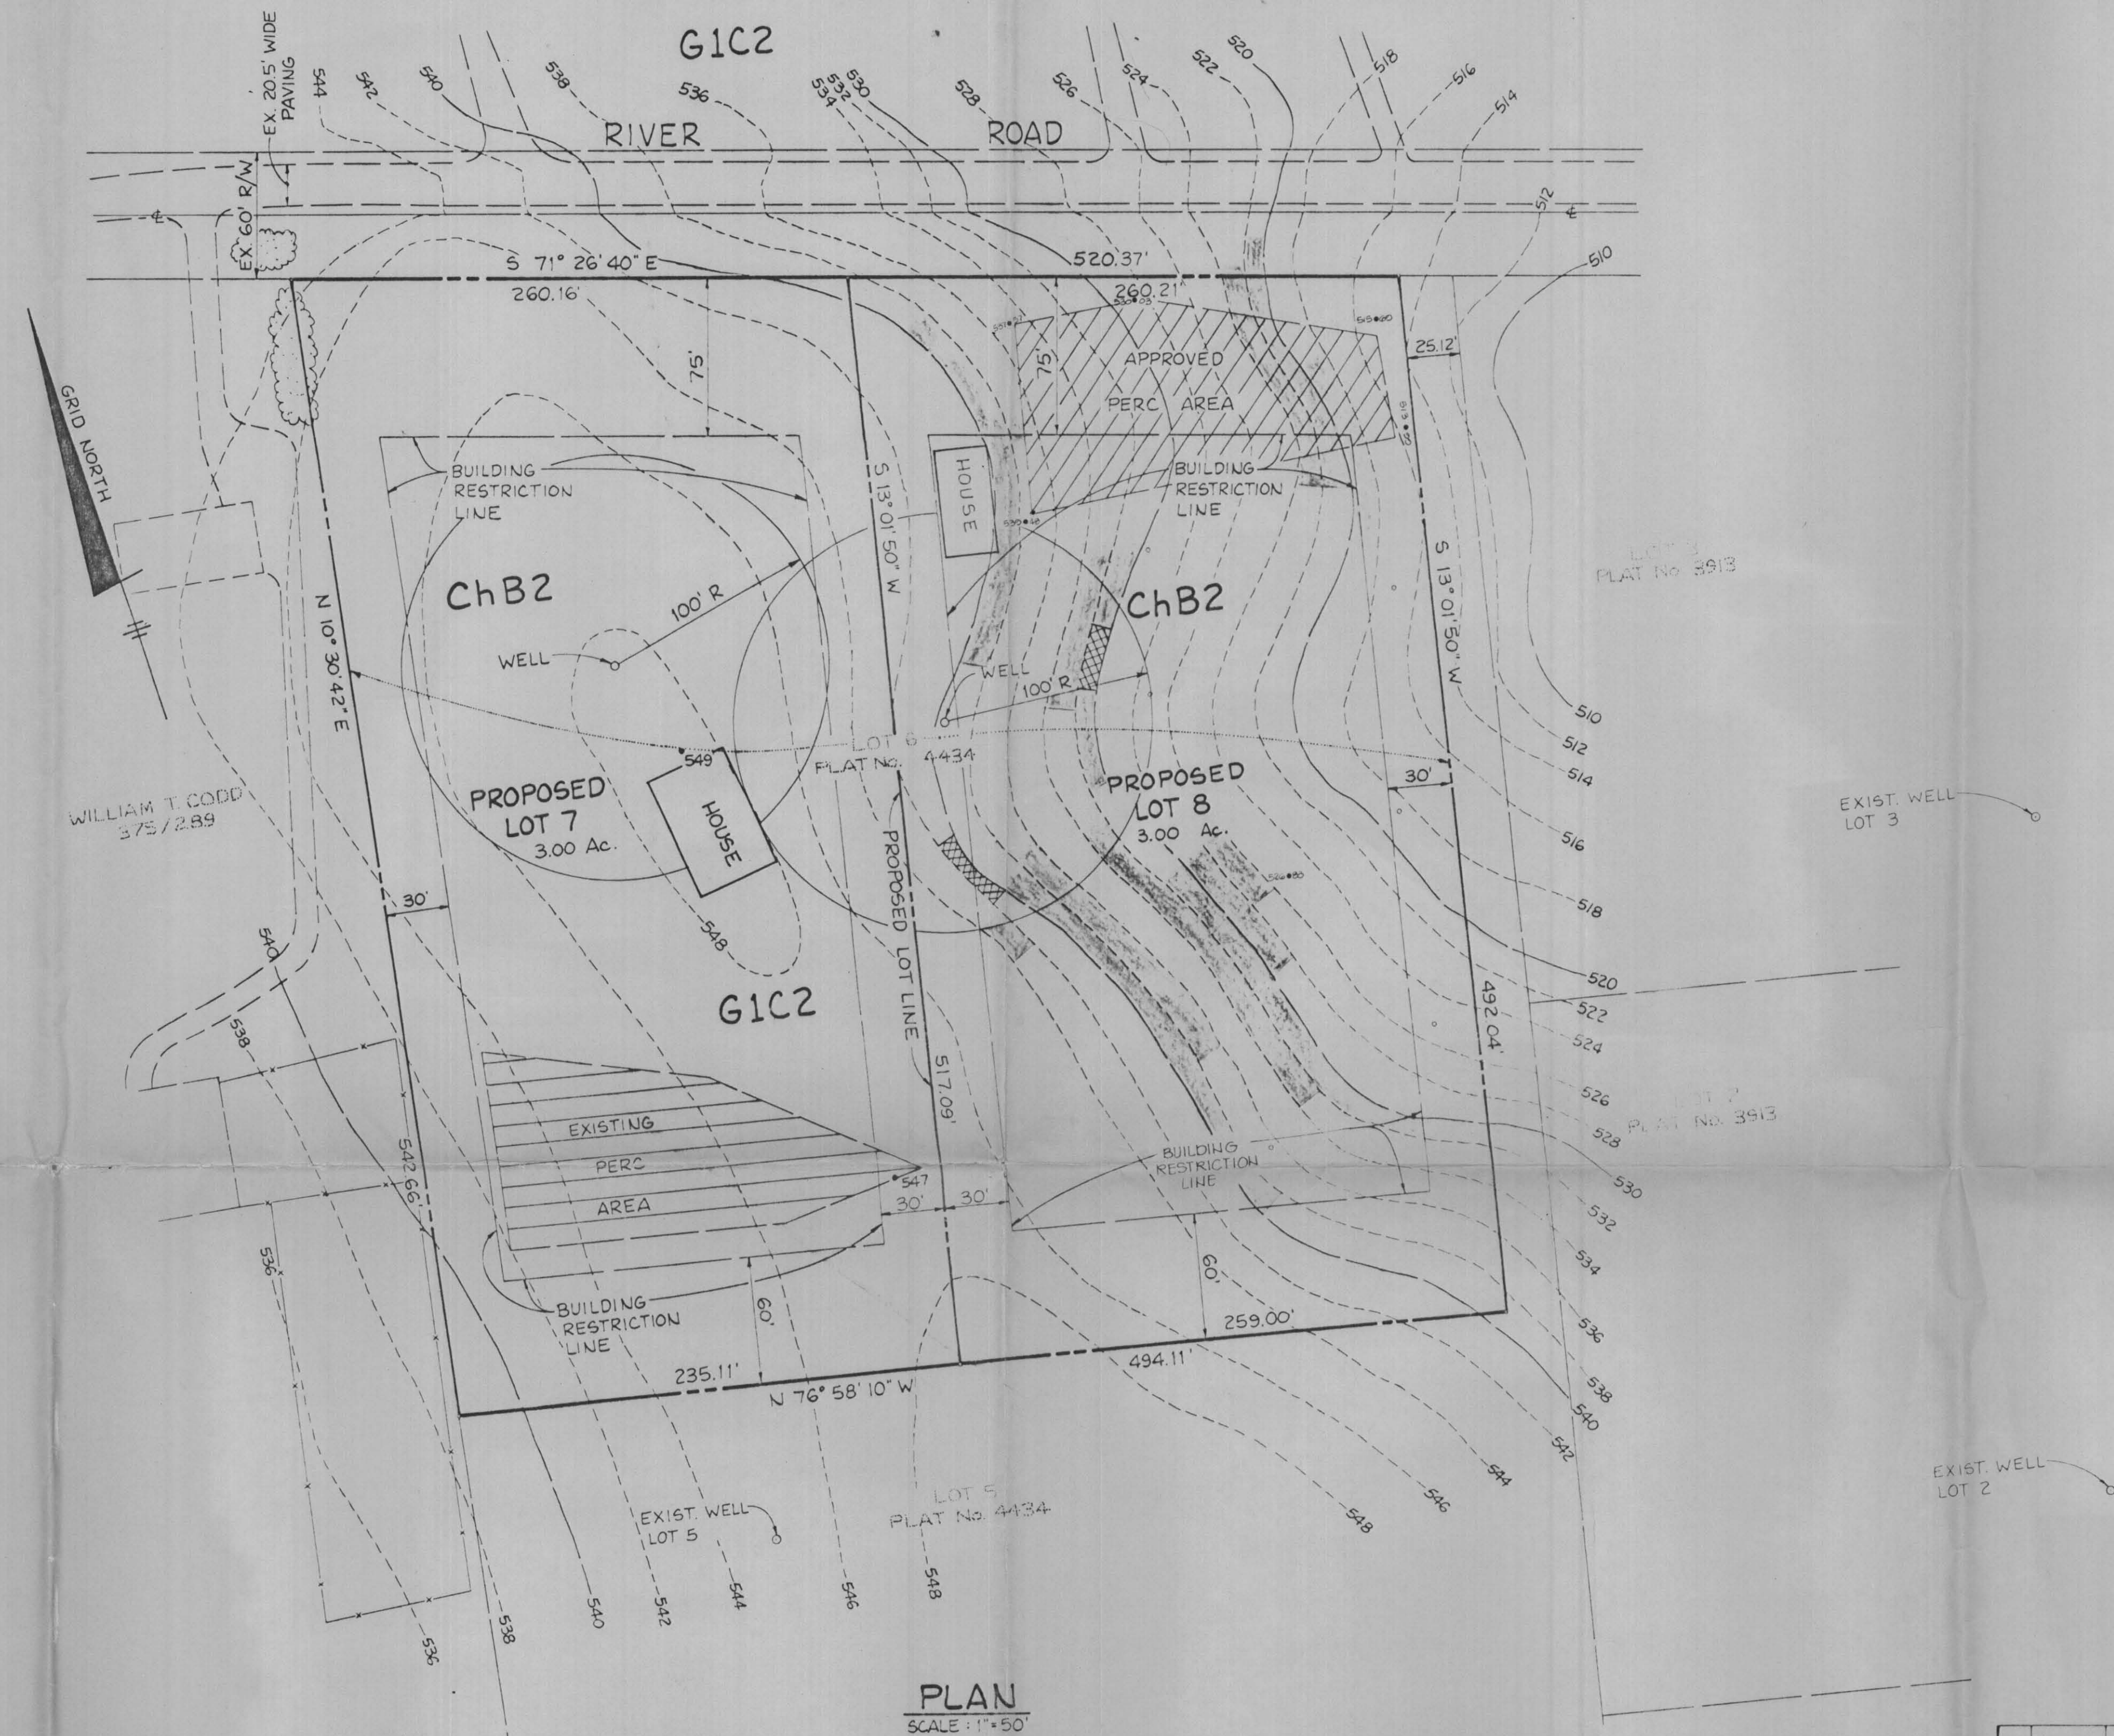

VICINITY MAP
SCALE: 1" = 2000'

GENERAL NOTES

- EXISTING PERC AREA SHOWN ON PROPOSED LOT 7 IS PER PLAT No. 4434, APPLICATION No. 29862.
- EXISTING WELL LOCATIONS SHOWN ON ADJACENT LOTS ARE PER FIELD SURVEY BY TRACY, SCHULTE & ASSOC., JUNE 1989.
- THE ENTIRE SITE IS OPEN FIELD EXCEPT FOR VEGETATION INDICATED IN CHART BELOW.
- THE LOTS SHOWN HEREON COMPLY WITH THE MINIMUM OWNERSHIP WIDTH AND LOT AREA AS REQUIRED BY THE MARYLAND STATE DEPARTMENT OF THE ENVIRONMENT.
- THIS AREA DESIGNATES A PRIVATE SEWAGE EASEMENT OF 10,000 SQ. FT. AS REQUIRED BY THE MARYLAND STATE DEPARTMENT OF THE ENVIRONMENT FOR INDIVIDUAL SEWAGE DISPOSAL. IMPROVEMENTS OF ANY NATURE IN THIS AREA ARE RESTRICTED UNTIL PUBLIC SEWER IS AVAILABLE. THE EASEMENT SHALL BECOME NULL AND VOID UPON CONNECTION TO A PUBLIC SEWAGE SYSTEM. THE COUNTY HEALTH OFFICER SHALL HAVE THE AUTHORITY TO GRANT VARIANCES FOR ENCROACHMENTS INTO THE PRIVATE SEWAGE EASEMENT. RECORDATION OF A MODIFIED SEWAGE EASEMENT PLAT SHALL NOT BE NECESSARY.
- SUBJECT PROPERTY ZONES "R" PER 8/21/1985 COMPREHENSIVE ZONING PLAN.
- DENOTES APPROVED PERC HOLE.
◦ DENOTES FAILED PERC HOLE.

SLOPE ANALYSIS

LEGEND

- AREAS OF 15% TO 25%
- AREAS OF 25% AND GREATER

EXISTING VEGETATION CHART

- 4' - 6" MAPLE TREES


SOILS CLASSIFICATION	
SYMBOL	DESCRIPTION
ChB2	CHESTER SILT LOAM, 3 TO 8% SLOPES, MODERATELY ERODED.
G1C2	GLENELG LOAM, 8 TO 15%, MODERATELY ERODED.

APPROVED FOR PRIVATE WATER AND PRIVATE SEWER SYSTEMS, HOWARD COUNTY HEALTH DEPARTMENT.
PERCENT VERSION OF
FINAL RECORD PLAT
SENT FOR APPROVAL 1/25/90 C. Williams
COUNTY HEALTH OFFICER DATE

TRACY, SCHULTE & ASSOCIATES INC. planning • architecture • engineering 8460 Baltimore National Pike • Ellicott City, Maryland 21043 • (301) 465-6105	
OWNER THOMAS SHAW 5804 RICHARDSON MEWS SQ CATONSVILLE, MD 21227	PROJECT RIVER ROAD LOCATION TAX MAP No. 4, PARCEL 103 3rd ELECTION DISTRICT HOWARD COUNTY, MARYLAND PLAT No. 4434, LOT 6
DEVELOPER THOMAS SHAW 5804 RICHARDSON MEWS SQ. CATONSVILLE, MD. 21227	TITLE EXISTING CONDITIONS, SOILS MAP & PRIVATE W & S PLAN
DATE NOV 22, 1989	PROJECT NO. 0197
DES. RMF DRN. DRK	SCALE AS SHOWN DRAWING 1 OF 1



James K. Tracy

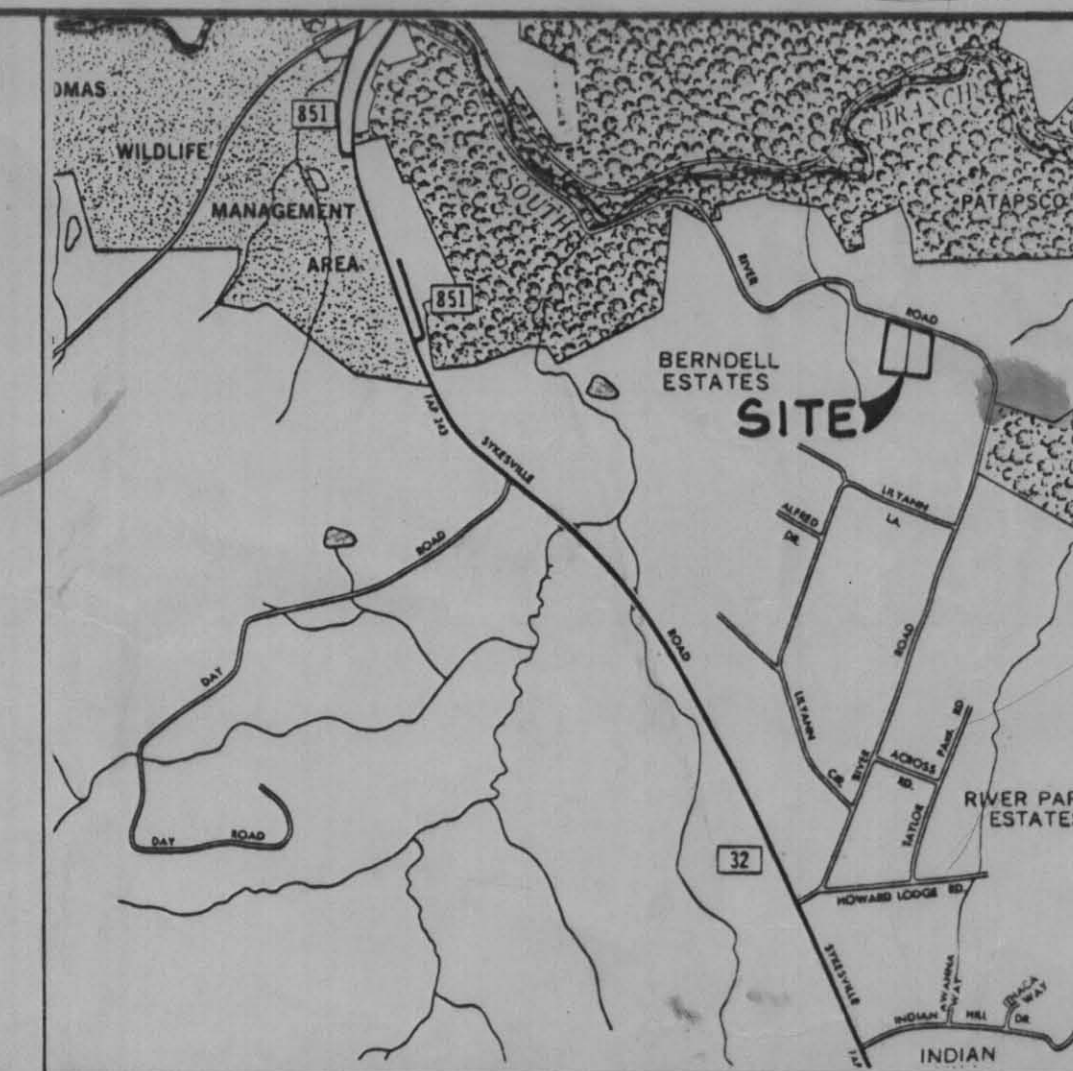


VICINITY MAP
SCALE: 1" = 2000'

GENERAL NOTES

- EXISTING PERC AREA SHOWN ON PROPOSED LOT 7 IS PER PLAT No. 4434, APPLICATION No. 29862.
- EXISTING WELL LOCATIONS SHOWN ON ADJACENT LOTS ARE PER FIELD SURVEY BY TRACY, SCHULTE & ASSOC., JUNE 1989.

Handwritten calculations:
 $100 \times 150 = 15000$
 $200 \times 150 = 30000$
 $30000 \div 2 = 15000$

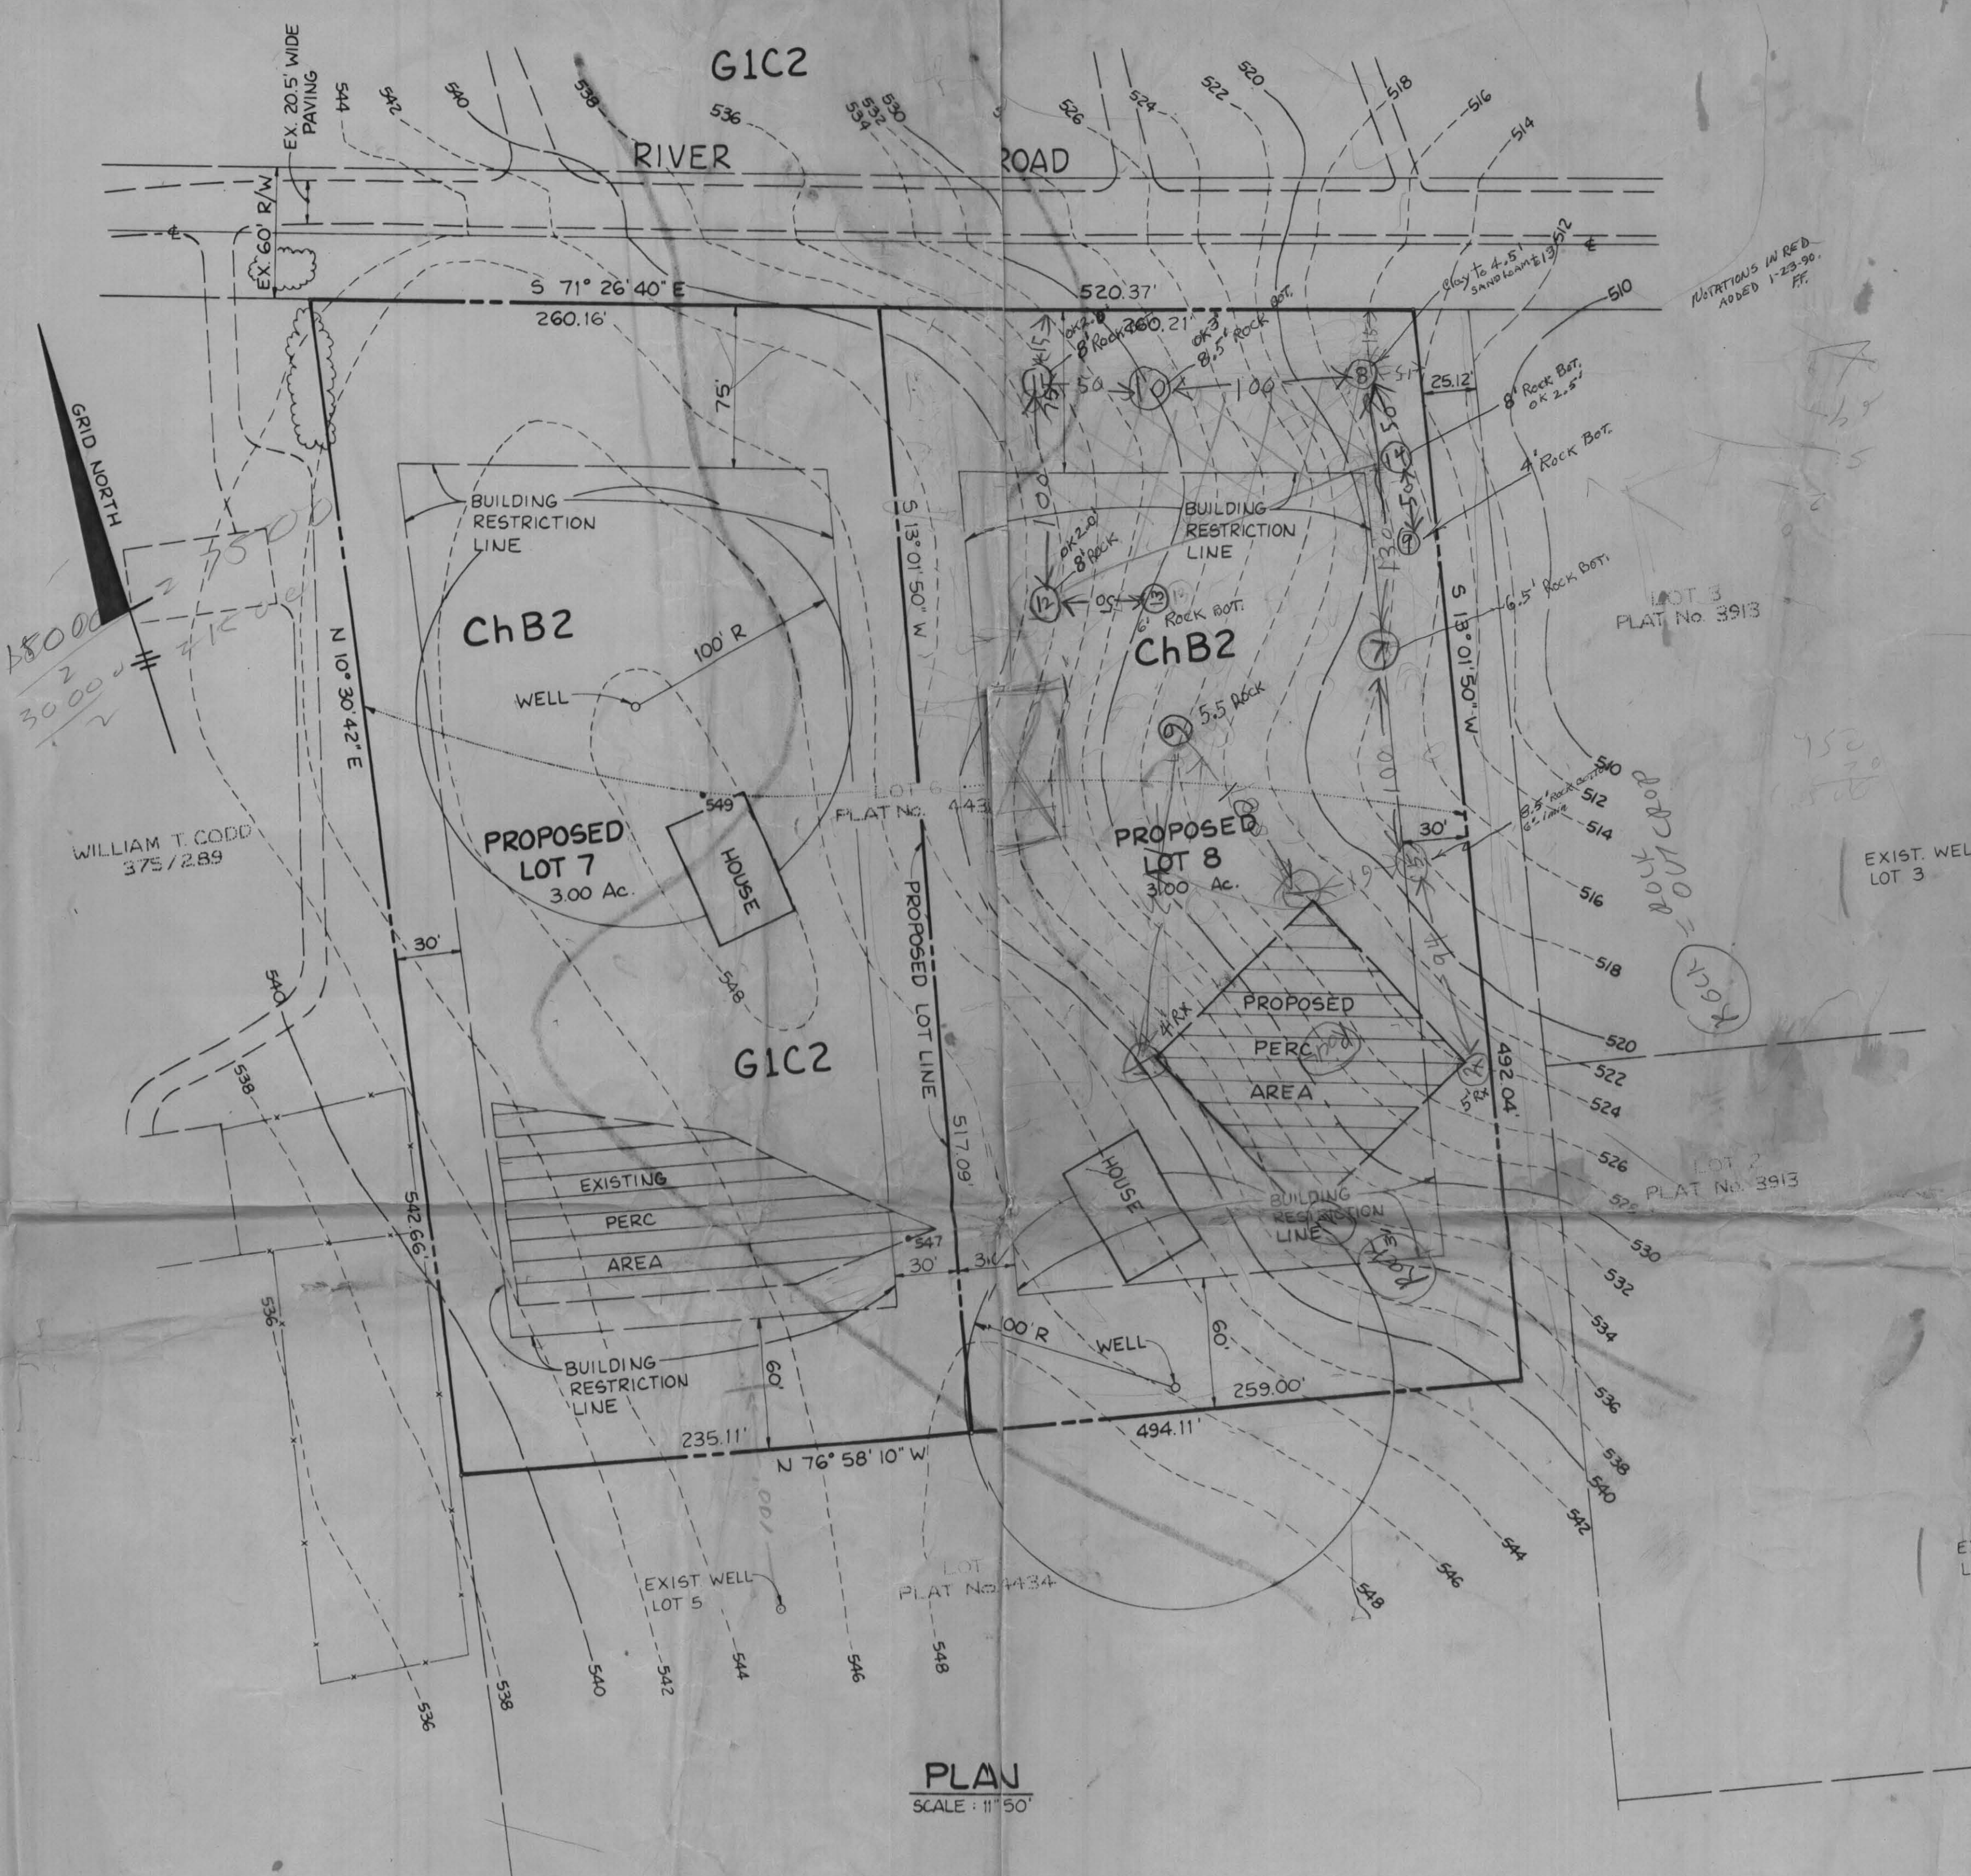



PLAN
SCALE: 1" = 50'

SOILS CLASSIFICATION	
SYMBOL	DESCRIPTION
ChB2	CHESTER SILT LOAM, 3 TO 8% SLOPES MODERATELY ERODED.
G1C2	GLENELG LOAM 8 TO 15% MODERATELY ERODED

NO. DATE		REVISION
TRACY, SCHULTE & ASSOCIATES INC. planning • architecture • engineering 8480 Baltimore National Pike • Ellicott City, Maryland 21043 • (301) 465-6105		
OWNER LYNN MARIE SPICER 7423 KATHY CALE RD. BALTIMORE, MD. 21208		PROJECT RIVER ROAD
DEVELOPER THOMAS SHAW 5804 RICHARDSON MEWS SQ. CATONSVILLE, MD. 21227		LOCATION TAX MAP No. 4, PARCEL 103 3rd ELECTION DISTRICT HOWARD COUNTY, MARYLAND TITLE EXISTING CONDITIONS, SOILS MAP & PRIVATE W & S PLAN
DATE JUNE 27, 1989		PROJECT NO. 0197
DES RMF	DRN DRK	SCALE AS SHOWN DRAWING 1 OF 1

7-11-89
No Rest of Proposed Lot 7 (old lot 6)
Required.
SAC

Handwritten notes:
Mail Out
Hole Lot
Permit
8/2/89

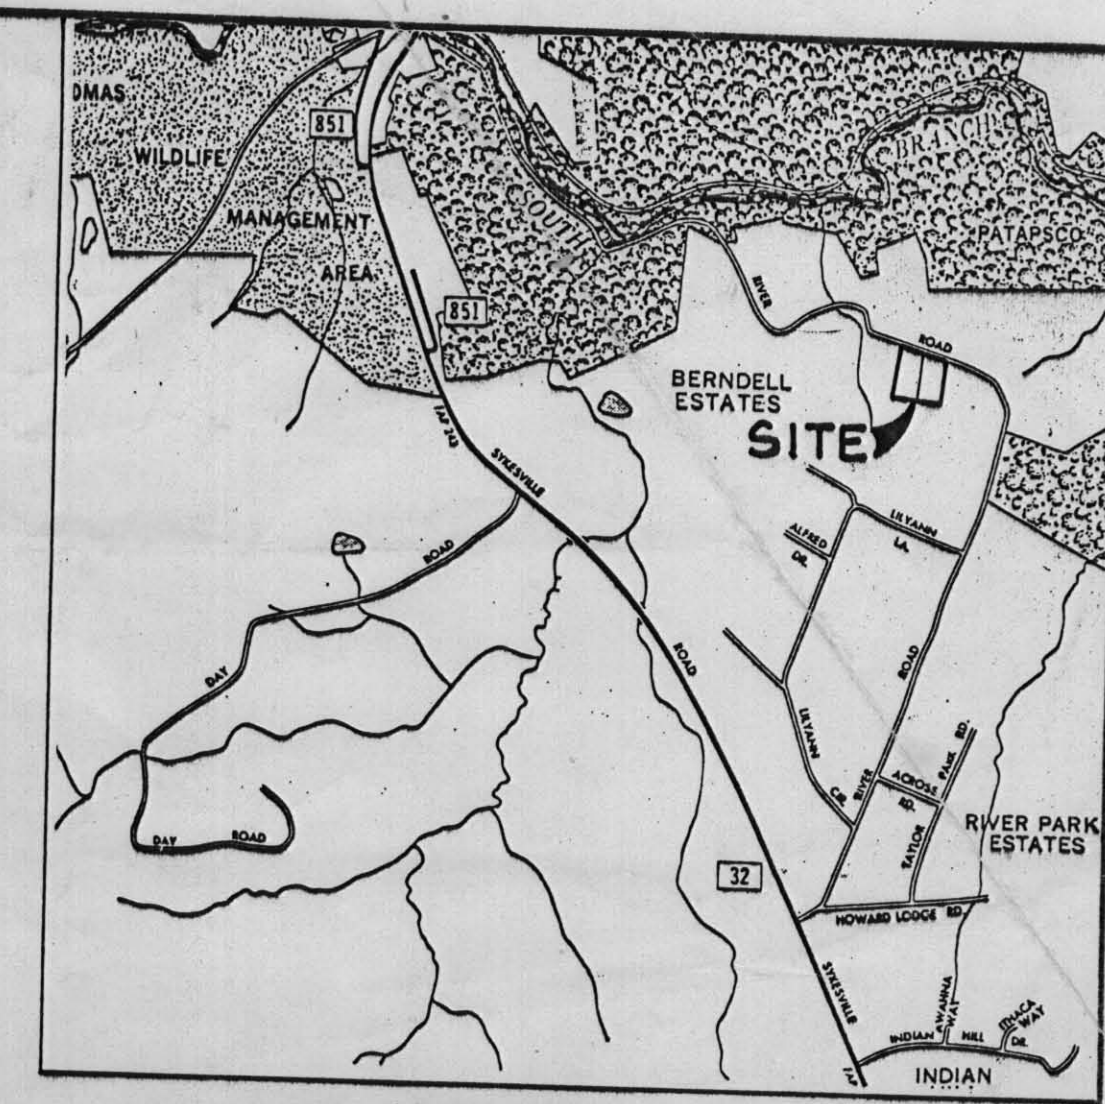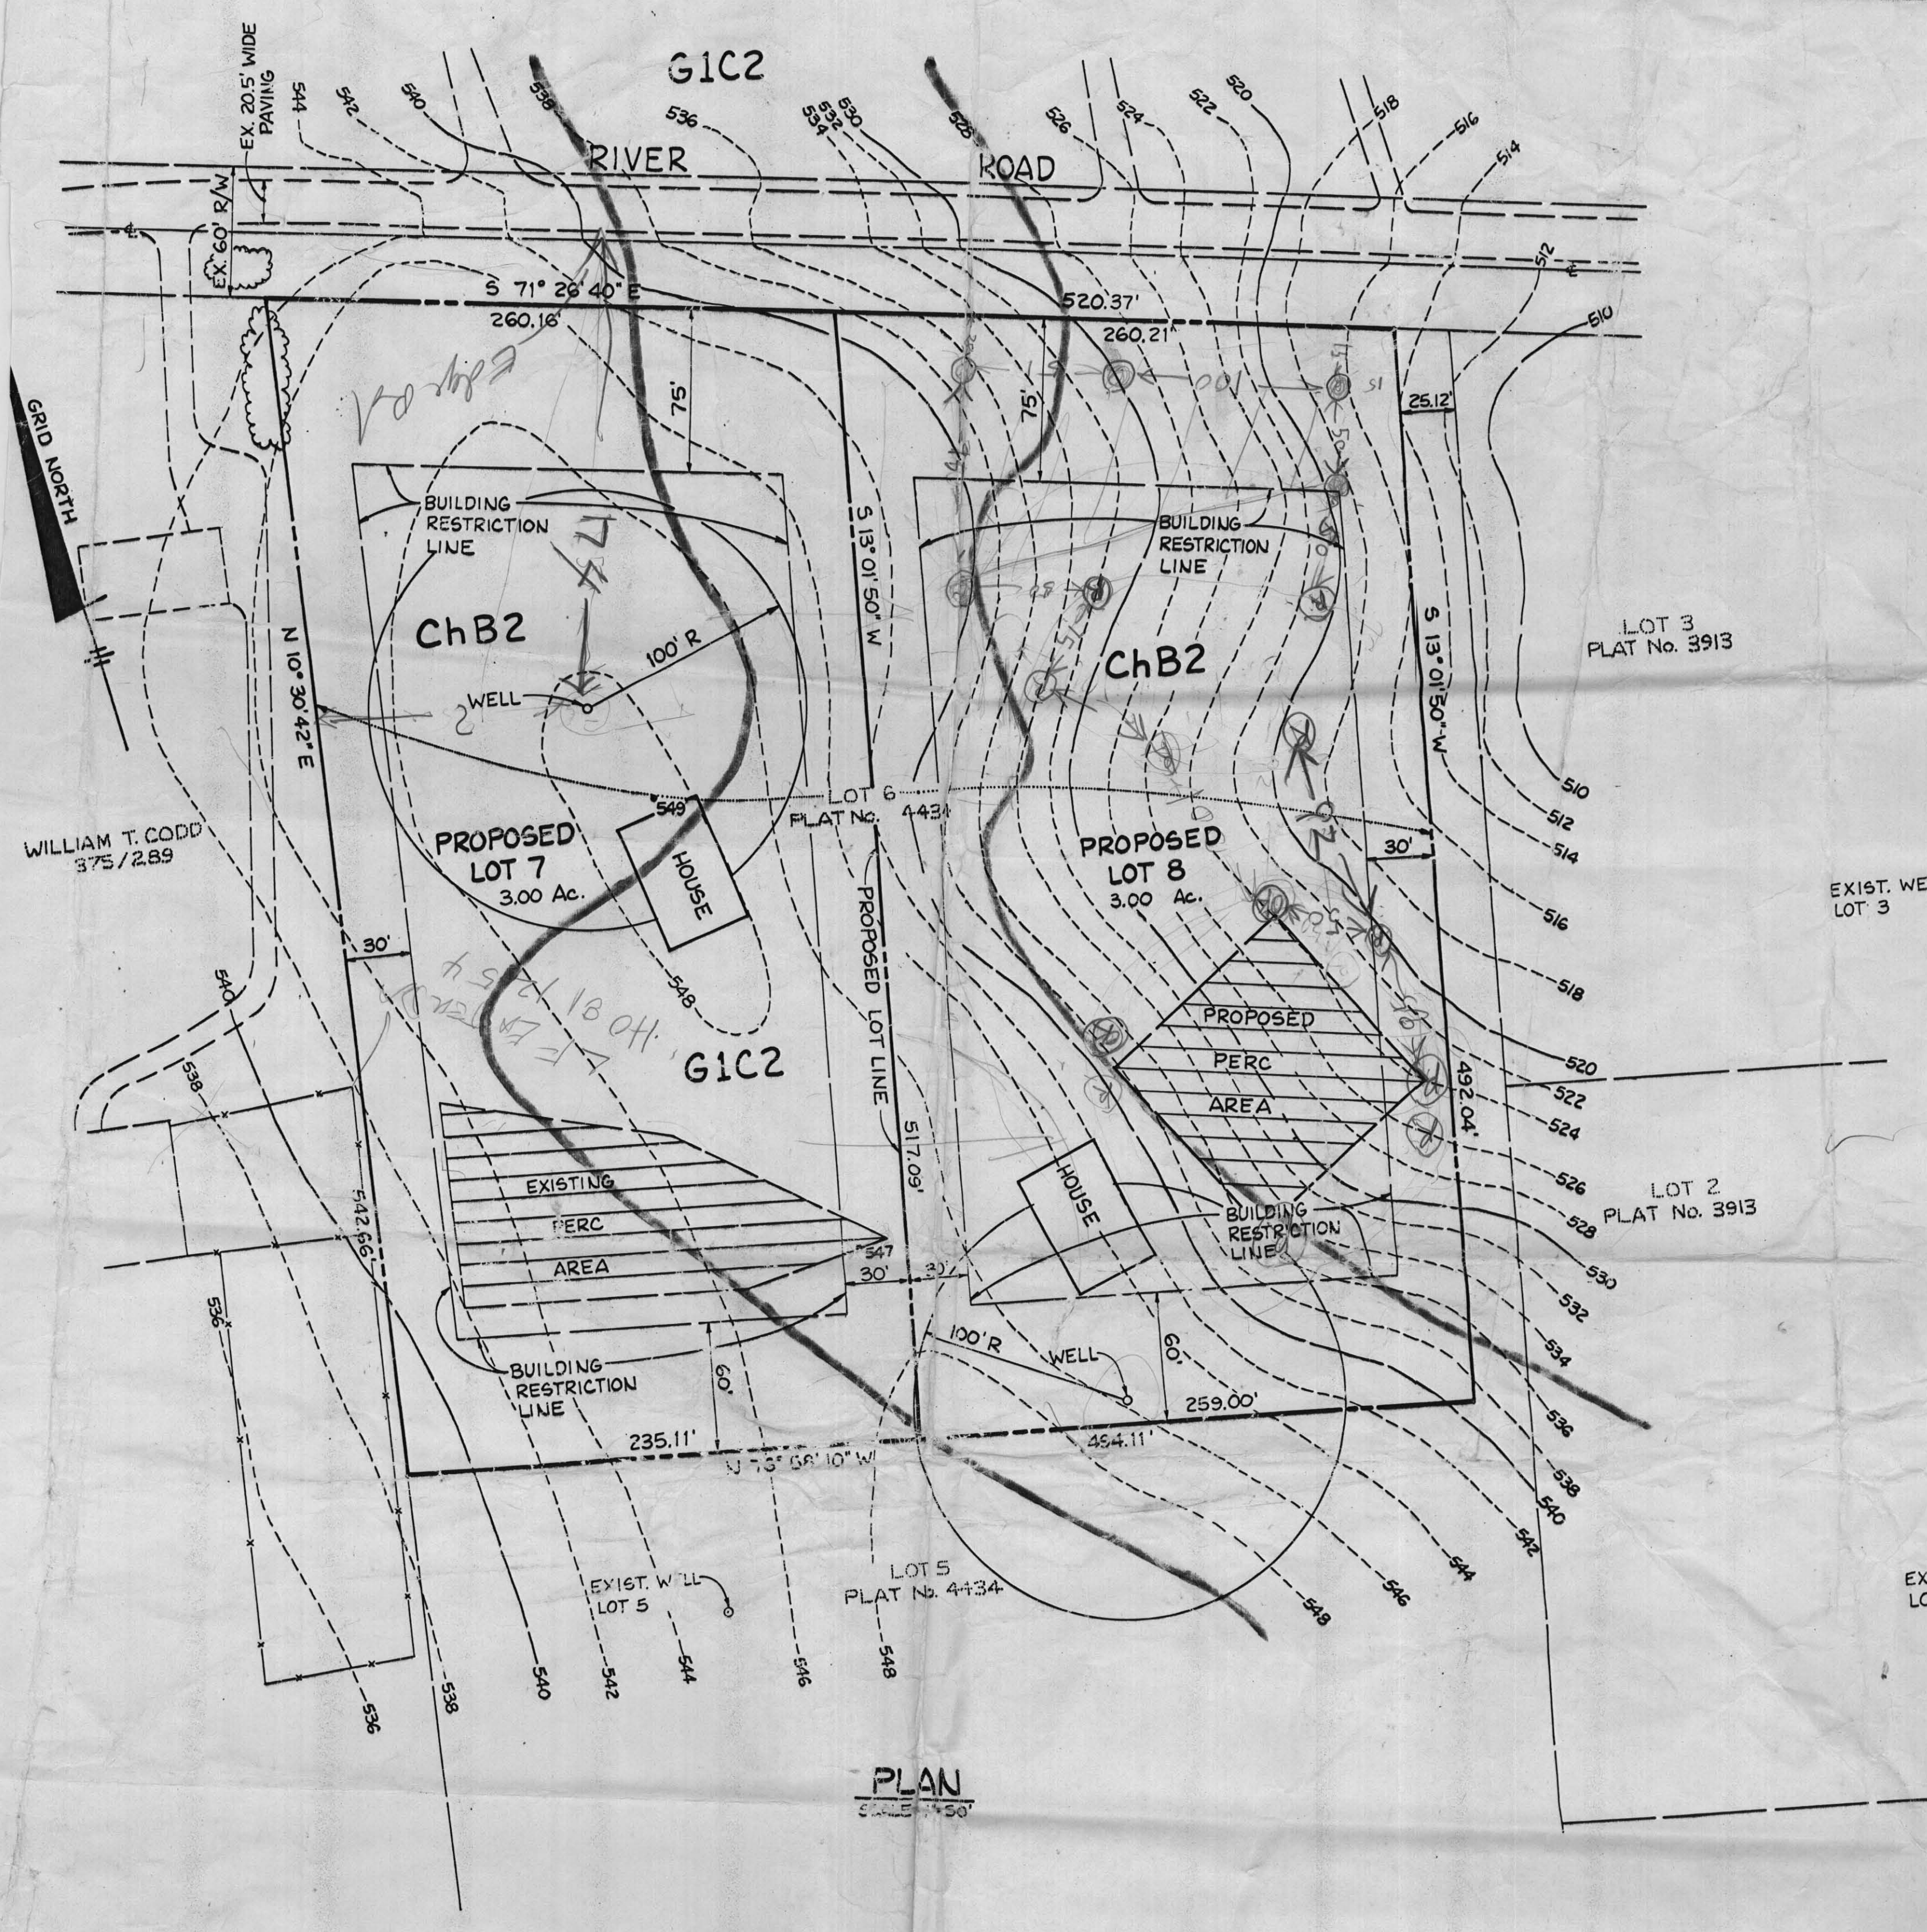

GENERAL NOTES

- 1.) EXISTING PERC AREA SHOWN ON PROPOSED LOT 7 IS PER PLAT No. 4434, APPLICATION No. 29862.
- 2.) EXISTING WELL LOCATIONS SHOWN ON ADJACENT LOTS ARE PER FIELD SURVEY BY TRACY, SCHULTE & ASSOC., JUNE 1989.

SOILS CLASSIFICATION

DESCRIPTION
.....CHESTER SILT LOAM, 3 TO 8% SLOPES, MODERATELY ERODED.
.....GLENELG LOAM, 8 TO 15%, MODERATELY ERODED.

NO.	DATE	REVISION
TRACY, SCHULTE & ASSOCIATES INC. planning • architecture • engineering 8490 Baltimore National Pike • Ellicott City, Maryland 21043 • (301) 465-6105		
SHAW PROPERTY SPICER PROPERTY		
OWNER:	PROJECT:	
LYNN MARIE SPICER 7423 KATHY CALE RD. BALTIMORE, MD. 21208	RIVER ROAD	
DEVELOPER:	LOCATION: TAX MAP No. 4, PARCEL 103 3rd ELECTION DISTRICT HOWARD COUNTY, MARYLAND	
THOMAS SHAW 5804 RICHARDSON MEWS SQ. CATONSVILLE, MD. 21227	PLAT No. 4434, LOT 6 TITLE: EXISTING CONDITIONS, SOILS MAP & PRIVATE W & S PLAN	
DES: RMF	DRN: DRK	DATE: JUNE 27, 1989 PROJECT NO: 0197
SCALE: AS SHOWN		DRAWING 1 OF 1

SUBDIVISION:

RIVER ROAD - SHAW PROPERTY

A 44700
LOT NUMBER: 8

DRY WELL OR DRY WELL AND TRENCH

		sq. ft./bedroom
	<u>Septic Tank</u>	<u>Minimum Total Square Feet</u>
3 bedroom	1000 gallon	
4 bedroom	1250 gallon	
5 bedroom	1500 gallon	

Inlet _____ feet below original grade.

Bottom maximum depth _____ feet below original grade.

Effective area begins at _____ feet below original grade.

NOTE: If trench is used to make up absorbent area, run the trench on level ground and leave a 5-foot earth buffer between dry well and trench. No trench is to exceed 100 feet in length. Trench inlet to be same as dry well, with _____ feet of stone below distribution pipe.

★ TOP SEAMED SEPTIC TANK

TRENCHES

(SHAWED DEPTH TO BEDROCK)
Trench to be 3 wide. 210 sq. ft./bedroom
Inlet 2 feet below original grade. 3BR = 210 L.F.
Bottom maximum depth 3 1/2 feet below original grade.
Effective area begins at 2 feet below original grade.
1 1/2 feet of stone below distribution pipe.

- NOTE:
- (1) No trench to exceed 100 feet in length.
 - (2) If more than one trench used, a distribution box is required.
 - (3) Trenches to be installed on level ground.
 - (4) Call for inspection of trench before gravel is installed.
 - (5) Provide 6" - 8" diameter cleanout and cap to grade or above on septic tank and drywell.
 - (6) If a garbage disposal is used, increase septic tank capacity by 50% and increase absorbent sidewall area by 22%.

LOCATION: PLACE THE FIRST 110' FROM THE
FRONT LOT LINE AND 75' FROM THE RIGHT LOT
LINE AS SEEN WHEN FACING PROPERTY FROM RIVER ROAD.
RUN TRENCHES ALONG CONTOUR TOWARD FRONT OF LOT.

1/25/90 CWL/lin