

PERMIT

SEWAGE DISPOSAL SYSTEM

DEPARTMENT OF HEALTH AND MENTAL HYGIENE

P _____

A 59036B

DISTRICT _____

DATE _____

DATE SYSTEM APPROVED _____

INSPECTOR _____

HOWARD COUNTY HEALTH DEPARTMENT
BUREAU OF ENVIRONMENTAL HEALTH
461-9933

RPS #7

INDEXED

_____ IS PERMITTED TO INSTALL _____ ALTER _____

ADDRESS ~~6858 Sanner Rd~~ PHONE _____

SUBDIVISION _____ LOT _____ ROAD 6858 Sanner Rd

PROPERTY OWNER Edward Cochran

ADDRESS _____

SEPTIC TANK CAPACITY _____ GALLONS

NUMBER OF BEDROOMS _____

_____ SQUARE FEET PER BEDROOM

LINEAR FEET OF TRENCH REQUIRED _____

*Replacement well only!
No info on septic*

** OLD ADDRESS 6858 Pindel School Rd **

PLANS APPROVED BY _____ DATE _____

COVER NO WORK UNTIL INSPECTED AND APPROVED

NEITHER THE HOWARD COUNTY COUNCIL NOR THE HEALTH DEPARTMENT IS RESPONSIBLE FOR THE SUCCESSFUL OPERATION OF ANY SYSTEM

NOTE: CLEANOUT REQUIRED EVERY 70 FEET OF SEWER LINE AND/OR AT 90° SWEEPS IN LINES FROM HOUSE TO DRAIN FIELDS, 90° ELBOWS NOT ACCEPTABLE.

NOTE: ALL PARTS OF SEPTIC SYSTEMS (I.E. TANK, DISTRIBUTION BOX TRENCHES) TO BE 100 FEET FROM WELL (UNLESS OTHERWISE SPECIFICALLY AUTHORIZED)

NOTE: IF DEEP TRENCH(ES) ARE USED CALL FOR INSPECTION BEFORE AND AFTER PLACING GRAVEL IN TRENCH(ES)

NOTE: NO DRY WELL SHALL EXCEED 15 FOOT IN DIAMETER NO ABSORPTION TRENCH TO EXCEED 100 FEET IN LENGTH

NOTE: ALL PIPE FROM HOUSE TO SEPTIC TANK MUST BE CAST IRON OR SCHEDULE 35/40 PVC OR ABS


PERMIT VOID AFTER TWO YEARS

NOTE: INSTALL STAND PIPE ON SEPTIC TANK AND DRY WELL STAND PIPES MUST BE 6 INCHES IN DIAMETER CAST IRON. CONCRETE OR TERRA COTTA OR PVA OR ABS ACCEPTED. IF TOP OF SEPTIC TANK IS DEEPER THAN 3 FEET. MANHOLE TO GRADE REQUIRED.

NOTE: DISTRIBUTION BOXES MUST HAVE BAFFLES

***INSTALLER IS RESPONSIBLE FOR OBTAINING FINAL APPROVAL ON THIS PERMIT**

A 59036B

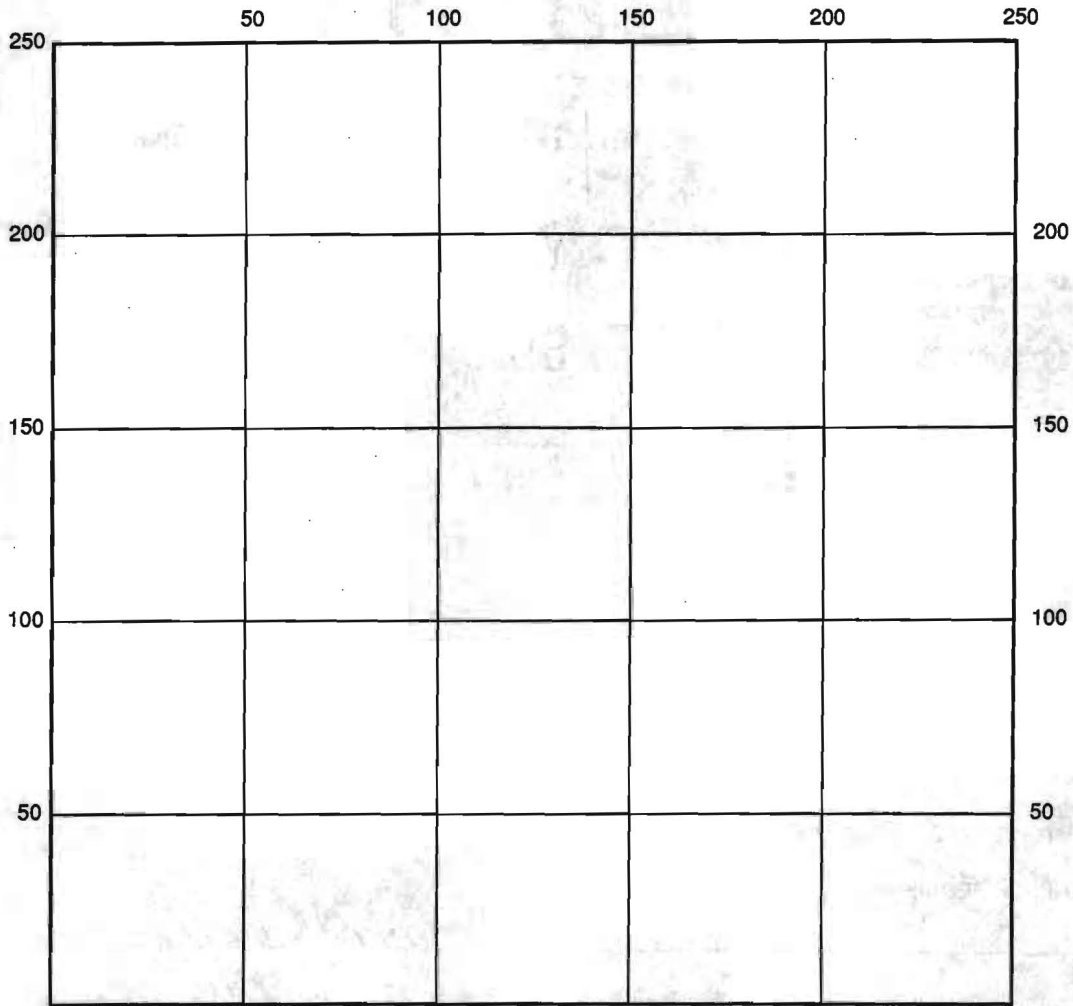

INDICATE NORTH - NAME ADJOINING ROADWAY AS BASE LINE

SEPTIC TANK LEVEL _____ CLEANOUTS _____

DISTRIBUTION BOX LEVEL _____

DRAIN FIELD/TITLE DEPTH _____ FT. TRENCH WIDTH _____ FT. INLET DEPTH _____ FT.

EFFECTIVE GRAVEL DEPTH _____ FT. TOTAL LENGTH _____ FT.

NUMBER OF TRENCHES _____ ONE SIDEWALL/BOTTOM AREA _____ SQ. FT.

DRYWALL INSIDE DIAMETER _____ FT. EFFECTIVE DEPTH BELOW INLET _____ FT.

ABSORBENT AREA _____ SQ. FT.

REMARKS: _____

DATE SYSTEM APPROVED _____ INSPECTOR _____

Attention Sarah Fogler

h
S

June 6,2006
To Mr. Mike Davis
Howard County Health Department

From Catherine Cochran
7400 Guilford Rd. (Formerly known as 6858 Sanner Rd., and also 6858 Pindell School Rd. The name changes were required by Howard County because of new road construction.)
Clarksville, MD 21029

Dear Mr. Davis,
My husband, Edward, and I are actively seeking to repair/replace our 50-year-old septic system. We were advised to do so by Fyock Septic Company because of occasional wet spots in the drainage area. Last year Fyock submitted a request for a permit on our behalf. However, because he no longer does installations, he has asked for a refund of the fee he paid.
We would like to get estimates from two or three companies to install a new system. In order to do this, we need to have a county approved plan, We understand that FSH submitted a plan that has been approved. Tomorrow I will file a new request for a permit and hope to get a copy of the approved site at that time. We hope that this will expedite the process.
Please advise me if I need to do anything more. Thank you for your attention to this matter.

Catherine J Cochran

Catherine J Cochran

6/6/06

To Sarah Fogle
From Catherine Joan Cochran
Re letter you requested

Thank you for your help. Would you please fax me a copy of the permit application?
I would like to be prepared when I come there tomorrow. 410 531 2128

Attachment for Mr. Davis

Catherine Joan Cochran
6/6/06