

Bureau of Environmental Health
 8930 Stanford Boulevard, Columbia, MD 21045
 Main: 410-313-2640 | Fax: 410-313-2648
 TDD 410-313-2323 | Toll Free 1-866-313-6300
www.hchealth.org
 Facebook: www.facebook.com/hocohealth

Maura J. Rossman, M.D., Health Officer

RECEIPT DATE: 8-10-20 **ONSITE SEWAGE DISPOSAL SYSTEM**

P 567933

APPROVAL DATE: 2/10/21 **PERMIT: CONSTRUCTION**

A _____

PROPERTY ADDRESS: 1411 Underwood Road

SUBDIVISION: Ewell Property LOT: 3 TAX ID: _____

CONTRACTOR: South Carroll Backhoe EMAIL: scbackhoe@comcast.net

CONTRACTOR ADDRESS: 4410 Salem Bottom Road, Westminster, MD 21157 PHONE: 410-596-3618

CONTRACTOR CERTIFIED FOR BAT INSTALLATION: MDE MANUFACTURER: Norweco

PROPERTY OWNER: Lee Stumpf EMAIL: _____

OWNER ADDRESS: 3634 Ligon Road, Ellicott City, MD PHONE: _____

BAT UNIT MODEL: Norweco PUMP SIZE: _____ PUMP TANK CAPACITY: _____

OPERATION & MAINTENANCE AGREEMENT DATE SIGNED: 5/26/2020 DATE RECORDED: _____

DISTRIBUTION SYSTEM: GRAVITY PRESSURE DOSED BEDROOMS: 5 APPLICATION RATE: 0.6

TRENCHES:	LINEAR FEET REQUIRED: <u>208.5</u>	INLET DEPTH: <u>2.5</u>
	TRENCH WIDTH: <u>3FT</u>	MAXIMUM BOTTOM DEPTH: <u>8FT</u>
	MINIMUM SPACE BETWEEN TRENCHES: <u>10FT</u>	EFFECTIVE AREA BEGINNING DEPTH: <u>5FT</u>

LOCATION: **PER APPROVED SITE PLAN. SEWAGE DISPOSAL AREA AND BAT UNIT LOCATION MUST BE STAKED BY LICENSED SURVEYOR PRIOR TO PRE-CONSTRUCTION INSPECTION.**

NOTES:

ISSUED BY: Hank Oswald ISSUE DATE: 8-11-20 EXPIRATION DATE: 8-10-21

- NOTE: CONTRACTOR MUST SCHEDULE A PRE-CONSTRUCTION INSPECTION PRIOR TO BEGINNING ANY INSTALLATION
- NOTE: CONTRACTOR MUST SCHEDULE AN INSPECTION AND GAIN APPROVAL OF ALL COMPONENTS PRIOR TO COVERING
- NOTE: STONE MUST BE APPROVED BY HEALTH DEPARTMENT AND GRAVEL TICKET MUST BE AVAILABLE FOR REVIEW.
- NOTE: WATERTIGHT SEPTIC TANKS REQUIRED
- NOTE: ALL PARTS OF SEPTIC SYSTEM SHALL BE AT LEAST 100 FEET DOWNGRAIDENT FROM ANY WATER WELL
- NOTE: MANHOLE RISERS REQUIRED ON ALL SEPTIC TANKS AND PUMP CHAMBERS
- NOTE: AN ELECTRICAL PERMIT IS REQUIRED FOR INSTALLATION OF ANY ELECTRICAL COMPONENTS OF THE SYSTEM
 ELECTRICAL PERMIT ISSUED E 20003165
- NOTE: AN INDIVIDUAL CERTIFIED BY MDE AND THE MANUFACTURER FOR BAT INSTALLATION MUST BE PRESENT AT ALL TIMES DURING BAT INSTALLATION.
- NOTE: MDE RECOMMENDS SEPTIC TANKS, BAT, AND OTHER PRETREATMENT UNITS BE PUMPED AT A FREQUENCY ADEQUATE TO ENSURE THAT SOLIDS ARE NOT DISCHARGED TO THE DISPOSAL AREA

**NEITHER THE HOWARD COUNTY COUNCIL NOR THE HEALTH DEPARTMENT IS RESPONSIBLE FOR THE SUCCESSFUL OPERATION OF ANY SYSTEM.
 PERMITTEE RESPONSIBLE FOR OBTAINING FINAL APPROVAL ON THIS PERMIT.
 CALL 410-313-1771 TO SCHEDULE INSPECTIONS.**



BACK RIVER PRE-CAST, LLC
 PO BOX 329
 GLYNDON, MD 21071
 PH# 410-833-3394

NORWECO CERTIFICATION

PROPERTY OWNER: KAREN STUMPF	INSTALLATION COMPANY: SOUTH CARROLL
ADDRESS: 1411 UNDERWOOD RD	CERTIFIED INSTALLER: ANDREW SCHISSLER
CITY, ZIPCODE & COUNTY: SYKESVILLE, 21784, HOWARD	PERMIT#
SIZE OF SYSTEM INSTALLED:	DATE INSTALLED: 08-20-20
600 GPD CONCRETE	START-UP DATE: 02-10-20
NUMBER OF BEDROOMS:	DATE OF FINAL INSPECTION:
TYPE OF INSTALLATION: NEW	DATE OF ELECTRICAL INSPECTION:
ELECTRICAL WIRING PER ELECTRICAL INSTRUCTIONS: YES	TANK LEVEL: YES
HT. OF CONTROL PANEL ABOVE FINAL GRADE: 24"	BURIAL DEPTH OF TANK: 24"
SYSTEM WIRED ON A 15-AMP DEDICATED CIRCUIT WITH STD. BREAKER: YES	RISERS 4" - 6" ABOVE GRADE: YES
LENGTH(S) OF UF WIRE PAST LAST AERATION RTISER(S): 30"	VENTED LID(S) ON AERATION CHAMBER(S): YES
FEMALE PLUG(S) WIRED TO UF WIRE: YES	ANY GROUND SETTLING AROUND TANK:
CONDUIT(S) ENTERING AERATION RISER MADE WITH A WATERTIGHT CONNECTION: YES	NO
ISTHE INSIDE OF THE CONDUIT ENTERING THE CONTROL PANEL(S) AND AERATION RISER(S) SEALED WITH DUCT SEAL: YES	

I certify that the Norweco Singulair TNT Wastewater Treatment System was installed according to the manufacture's specifications.

Matthew Geckle

February 10, 2021

Signature of BRP Representative

Vice-President

Date

Ron Thompson

From: Oswald, Hank <hoswald@howardcountymd.gov>
Sent: Wednesday, June 24, 2020 10:11 AM
To: Ron Thompson
Cc: Lee Stumpf
Subject: BAT Plan_1411 Underwood Road

Hi Ron:


The BAT plan was reviewed with the following comments:

- 1.) The initial system calculation sidewall reduction credit should be 0.5 (not 0.45). Effective area begins at 5 and ends at 8. The 2nd replacement system sidewall should be 0.45 (not 0.5). Effective area begins at 4.5 and ends at 8. This will of course change the amount of trench shown in the layout.
- 2.) The initial trench detail should show a trench depth of 8 feet (not 7 feet).
- 3.) Match septic profile with layout. The lengths of pvc before and after the tank don't seem to align. This may also change the % of fall to tank. 2-5% fall is favorable.

If you can drop-off a revision by 10 a.m. tomorrow morning, I will review it and hopefully sign off on the building permit. Lee has my cell phone # to coordinate drop-off if he would like. Should you have any questions, please don't hesitate to ask.

Respectfully,

Hank

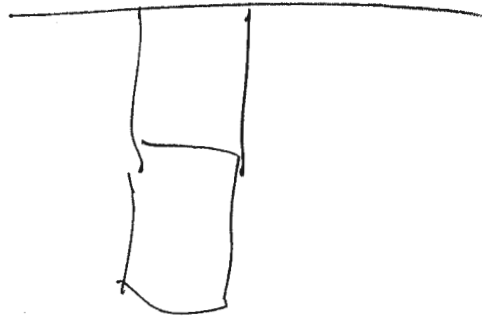

Hank Cell Phone

410-719-7405

Maura J. Rossman, M.D., Health Officer

**OPERATION AND MAINTENANCE AGREEMENT
FOR AN ON-SITE SEWAGE DISPOSAL SYSTEM
HAVING AN ADVANCED PRE-TREATMENT SYSTEM**

THIS AGREEMENT is made this 26th day of MAY 2020, among LUKE (LEE) & KAREN STUMPF, hereinafter collectively referred to as "Owner", and the Howard County Health Department hereinafter referred to as the "County".

WHEREAS, Owner is the owner or contract owner of a parcel of land located at 1441 UNDERWOOD RD. SYKEVILLE, MD, in the 3rd Election District of Howard County, Maryland, and the deed and subdivision plat of the property is recorded among the Land Records of Howard County, Maryland, Tax Map # 9, Block # 8, Parcel # 74, Deed Reference # _____ and Tax Account # 03354873 ("the Property").

WHEREAS, The Property is suitable for the installation of a conventional on-site sewage disposal system with an advanced pre-treatment system, utilizing best available technology to perform nitrogen reduction, in accordance with the Code of Maryland Regulations 26.04.02.07, effective November 24, 2016. The pre-treatment device being installed is NORWOOD SINGLELINE TNT 500

NOW, THEREFORE, the parties hereto agree as follows:

A. Owner hereby grants to the County the right to enter upon the Property at any reasonable time with prior notice for access to the system to make periodic inspections and the Owner agrees to provide any information and data in Owner's possession reasonably requested and needed by the County.

B. Owner acknowledges and agrees that neither the County nor any of its agents or employees, either officially or individually, underwrites the operation of any system approved by them.

C. The Owner will devote reasonable care and effort to the operation and maintenance of the system in perpetuity or until a public sewer connection is made so that a system malfunction is not the result of poor maintenance, faulty operation, or neglect.

D. The Owner agrees to enter into a contract reasonably acceptable to the Owner and the County with a private entity to operate and maintain on a regularly scheduled basis an approved advanced pre-treatment system. The owner shall supply a copy of the contract to the County when it is renewed or altered.

E. This agreement shall run with the land and upon Owner's taking title to the Property shall bind the Owner, their heirs, successors, and assigns to the provisions of the agreement as long as

the property is in existence and after installation of the system. Owner further agrees that they shall inform in writing any subsequent purchaser or lessee of the Property that the system shall require maintenance or other attention. Upon taking title to the Property, the Owner agrees to cause this agreement to be recorded in the Land Records of Howard County and assure that it becomes part of the Deed for the subject property in order that prospective buyers may be aware of the special conditions affecting this property.

F. This agreement shall not be construed to limit any authority of the County to protect the public health, safety or comfort or to issue any other orders to take any other action which is now or may hereafter be within its authority.

G. This agreement may be voided at any time at the discretion of the County.

H. This agreement contains the entire agreement and understanding between the County and the Owner. There are no additional terms other than as contained in this agreement. This agreement may not be modified, except in writing signed by each of the parties or by their authorized representatives.

I. The laws of the State of Maryland govern the provisions of all transactions pursuant to this agreement.

J. Owner acknowledges and agrees that interior renovations to increase the number of bedrooms or an increase in living space shall not be permitted without approval from the County.

IN WITNESS WHEREOF, the parties have signed this agreement on the date indicated above.

Bert Nifan 5/26/2020
Howard County Health Department

[Signature] 5/13/2020
Owner #1 Signature Date
Lee Stumpf
Owner #1 Print Name

[Signature] 5-13-20
Owner#2 Signature Date
Karen Stumpf
Owner #2 Print Name

Buyer #1 Signature Date


Buyer #2 Signature Date

Buyer #1 Print Name

Buyer #2 Print Name

REC'D BY WELL & SEPTIC
'20 MAY 19 AM 9:13

Please sign
& return to
Hank

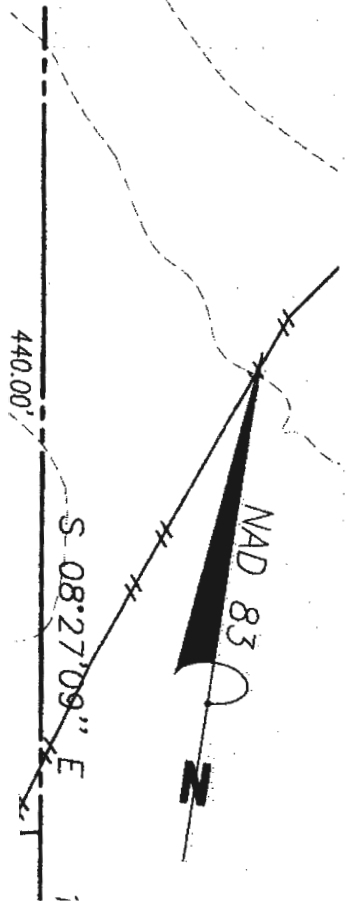

PRACTICE
N-1 ROOFTOP DISC
N-2 ROOFTOP DISC

Oswald, Hank

From: Oswald, Hank
Sent: Wednesday, June 24, 2020 10:11 AM
To: Ron Thompson
Cc: Lee Stumpf
Subject: BAT Plan_1411 Underwood Road

Hi Ron:

The BAT plan was reviewed with the following comments:

- 1.) The initial system calculation sidewall reduction credit should be 0.5 (not 0.45). Effective area begins at 5 and ends at 8. The 2nd replacement system sidewall should be 0.45 (not 0.5). Effective area begins at 4.5 and ends at 8. This will of course change the amount of trench shown in the layout.
- 2.) The initial trench detail should show a trench depth of 8 feet (not 7 feet).
- 3.) Match septic profile with layout. The lengths of pvc before and after the tank don't seem to align. This may also change the % of fall to tank. 2-5% fall is favorable.

If you can drop-off a revision by 10 a.m. tomorrow morning, I will review it and hopefully sign off on the building permit. Lee has my cell phone # to coordinate drop-off if he would like. Should you have any questions, please don't hesitate to ask.

Respectfully,

Hank

Ron Thompson

To: Oswald, Hank
Cc: Lee Stumpf
Subject: RE: BP/SBAT Plan Review Comments_1411 Underwood Road

Hank:

Revised Plan is attached. Please see responses below.

Thank you.

Ronald E. Thompson, PE
VANMAR ASSOCIATES
310 South Main Street
PO Box 328
Mount Airy, Maryland 21771
301-829-2890 (O)
443-421-2164 (C)
301-831-5603 (F)

From: Oswald, Hank <hoswald@howardcountymd.gov>
Sent: Tuesday, June 09, 2020 4:55 PM
To: Ron Thompson <ron@vanmar.com>
Cc: Lee Stumpf <forrentalinfo@yahoo.com>
Subject: Re: BP/SBAT Plan Review Comments_1411 Underwood Road

Hi Ron,

I spoke to Jeff about your design. If you want to maintain a gravity design while not utilizing the very top of the SDA, then place the initial system at the very bottom of the SDA and work backwards with the other systems. Septic system design revised to place initial system at the bottom of the SDA and work backwards with the other systems.

Hank

Sent from my Verizon, Samsung Galaxy smartphone

From: Oswald, Hank <hoswald@howardcountymd.gov>
Sent: Tuesday, June 9, 2020 3:47:41 PM
To: 'ron@vanmar.com' <ron@vanmar.com>
Cc: Lee Stumpf <forrentalinfo@yahoo.com>
Subject: Re: BP/SBAT Plan Review Comments_1411 Underwood Road

Hi Ron:

The Site Plan for BAT installation received on June 5 (picked up June 9) was reviewed with the following comments:

- 1.) Initial trench detail is incorrect. Elevation #s don't seem accurate. Please note: The trench invert minimum depth is 18 inches. Elevations have been revised.
- 2.) You sized the system for 3 bedroom. Floor plans show 5 bedrooms including the den in the basement and play room/office on 2nd floor. There is a note on the perc cert plan that states the max # of bedrooms is 5. (This was mentioned before but not addressed in the revision) Design revised for a 5 bedroom house.
- 3.) Show all perc test hole locations on the plan. The plan is missing holes 521, 522, 523 and 524. (This was mentioned before but not addressed in the revision) All perc holes now shown.
- 4.) Show elevation # next to each perc test hole. Elevations provided next to each perc test hole.
- 4.) Utilize very top portion of the SDA. Place first system at top of SDA. (This was mentioned before but not addressed in the revision). Per June 9 email, system design revised to start the initial system at the bottom of the SDA.
- 5.) Add 5 foot measurement between house and first clean-out on layout. 5-ft measurement added between house and first cleanout

Let me know if you have any questions.

Regards,

Hank

Hank Oswald
Howard County Health Department
Well and Septic Program

From: Oswald, Hank <hoswald@howardcountymd.gov>
Sent: Wednesday, May 20, 2020 1:24 PM
To: 'ron@vanmar.com' <ron@vanmar.com>
Cc: Lee Stumpf <forrentalinfo@yahoo.com>
Subject: Fw: BP/SBAT Plan Review Comments_1411 Underwood Road

Hi Ron:

In addition to my comments sent January 27, 2020 regarding the Site Plan for BAT Installation (See Bat Plan memo attached), I have few more comments based on a floor plans and O/M agreement recently submitted by Mr. Stumpf.

- 1.) The site plan and BAT Plan must match foundation plan and include front porch slab as well as basement walk-up.
- 2.) Show initial trench detail on plan
- 3.) Floor plans show 5 bedrooms including the den in the basement and play room/office on 2nd floor while BAT plan is sized for only 3 bedrooms. Please note, I am unable to read the building permit application, so it is possible the basement and playroom/office space maybe unfinished space.

Please let me know if you have any questions.

Thanks,

Hank

Hank Oswald
Howard County Health Department
Well and Septic Program

From: Oswald, Hank
Sent: Monday, January 27, 2020 11:12 AM
To: 'ron@vanmar.com' <ron@vanmar.com>
Subject: BP/SBAT Plan Review Comments_1411 Underwood Road

Hello Ron:

Attached, please find plan review comments for 1411 Underwood Road. I also plan to contact the owner/developer about the O & M Agreement plus floor plans.

Should you have any questions or concerns, please don't hesitate to contact me.

Respectfully,

Hank

Hank Oswald
Licensed Environmental Health Specialist
Howard County Health Department
Bureau of Environmental Health
Well & Septic Program
8930 Stanford Boulevard
Columbia, MD 21045
410.313.1786 (Office)
hoswald@howardcountymd.gov



CONFIDENTIALITY NOTICE

This message and the accompanying documents are intended only for the use of the individual or entity to which they are addressed and may contain information that is privileged, confidential, or exempt from disclosure under applicable law. If the reader of this email is not the intended recipient, you are hereby notified that you are strictly prohibited from reading, disseminating, distributing, or copying this communication. If you have received this email in error, please notify the sender immediately and destroy the original transmission.

Maura J. Rossman, M.D., Health Officer

MEMORANDUM

TO: Vanmar Associates, Inc.
310 South Main Street
Mount Airy, MD 21771

FROM: Hank Oswald, L.E.H.S.
Well & Septic Program

RE: Site Plan for BAT Installation
Ewell Property, Lot 3
1411 Underwood Road

Date: January 27, 2020

The following comments pertain to the review of the BAT Plan for **1411 Underwood Road**:

- 1.) Change title to "*Site Plan for BAT Installation*". Plan Title revised "SITE PLAN FOR BAT INSTALLATION"
- 2.) Show all perc test hole locations on the plan (Perc Cert Plan attached). Perc test hole locations now shown
- 3.) Move BAT unit closer to house while maintaining the 20-foot setback. BAT unit relocated
- 4.) Increase fall to at least 2%. Pipe slope is minimum 2%
- 5.) Place initial system at top of the sewage disposal area. Initial system is located as high as it can be and still have gravity flow
- 6.) Septic profile shows 1st cleanout at 7 ft. and the BAT unit at 127 ft. from house while the plan layout shows slightly different measurements. Plan and profile updated
- 7.) Per the perc cert plan, an operation & maintenance agreement must be filed with Howard County Land Records prior to building permit approval (O & M Agreement Attached). Owner provided O&M Agreement to submit to the County.

Maura J. Rossman, M.D., Health Officer

MEMORANDUM

TO: Vanmar Associates, Inc.
310 South Main Street
Mount Airy, MD 21771

FROM: Hank Oswald, L.E.H.S.
Well & Septic Program

RE: Site Plan for BAT Installation
Ewell Property, Lot 3
1411 Underwood Road

Date: January 27, 2020

The following comments pertain to the review of the BAT Plan for **1411 Underwood Road**:

- 1.) Change title to “*Site Plan for BAT Installation*”.
- 2.) Show all perc test hole locations on the plan (Perc Cert Plan attached).
- 3.) Move BAT unit closer to house while maintaining the 20-foot setback.
- 4.) Increase fall to at least 2%.
- 5.) Place initial system at top of the sewage disposal area.
- 6.) Septic profile shows 1st cleanout at 7 ft. and the BAT unit at 127 ft. from house while the plan layout shows slightly different measurements.
- 7.) Per the perc cert plan, an operation & maintenance agreement must be filed with Howard County Land Records prior to building permit approval (O & M Agreement Attached). ➔

Oswald, Hank

From: Oswald, Hank
Sent: Wednesday, May 20, 2020 1:25 PM
To: 'ron@vanmar.com'
Cc: Lee Stumpf
Subject: Fw: BP/SBAT Plan Review Comments_1411 Underwood Road
Attachments: O&M agreement 4.23.18.pdf; BAT Plan_1411 Underwood Road_Tc_vanmar_2020.pdf

Hi Ron:

In addition to my comments sent January 27, 2020 regarding the Site Plan for BAT Installation (See Bat Plan memo attached), I have few more comments based on a floor plans and O/M agreement recently submitted by Mr. Stumpf.

- 1.) The site plan and BAT Plan must match foundation plan and include front porch slab as well as basement walk-up.
- 2.) Show initial trench detail on plan
- 3.) Floor plans show 5 bedrooms including the den in the basement and play room/office on 2nd floor while BAT plan is sized for only 3 bedrooms. Please note, I am unable to read the building permit application, so it is possible the basement and playroom/office space maybe unfinished space.

Please let me know if you have any questions.

Thanks,

Hank
Hank Oswald
Howard County Health Department
Well and Septic Program

From: Oswald, Hank
Sent: Monday, January 27, 2020 11:12 AM
To: 'ron@vanmar.com' <ron@vanmar.com>
Subject: BP/SBAT Plan Review Comments_1411 Underwood Road

Hello Ron:

Attached, please find plan review comments for 1411 Underwood Road. I also plan to contact the owner/developer about the O & M Agreement plus floor plans.

Should you have any questions or concerns, please don't hesitate to contact me.

Respectfully,

Hank

Hank Oswald
Licensed Environmental Health Specialist
Howard County Health Department
Bureau of Environmental Health
Well & Septic Program
8930 Stanford Boulevard
Columbia, MD 21045
410.313.1786 (Office)
hoswald@howardcountymd.gov



CONFIDENTIALITY NOTICE

This message and the accompanying documents are intended only for the use of the individual or entity to which they are addressed and may contain information that is privileged, confidential, or exempt from disclosure under applicable law. If the reader of this email is not the intended recipient, you are hereby notified that you are strictly prohibited from reading, disseminating, distributing, or copying this communication. If you have received this email in error, please notify the sender immediately and destroy the original transmission.

6.4.20

St. 11 waiting
on BAT Plan.

- H

Oswald, Hank

From: Oswald, Hank
Sent: Monday, January 27, 2020 11:13 AM
To: 'ron@vanmar.com'
Subject: BP/SBAT Plan Review Comments_1411 Underwood Road
Attachments: O&M agreement 4.23.18.pdf; BAT Plan_Memo To Vamar__2020.pdf

Hello Ron:

Attached, please find plan review comments for 1411 Underwood Road. I also plan to contact the owner/developer about the O & M Agreement plus floor plans.

Should you have any questions or concerns, please don't hesitate to contact me.

Respectfully,

Hank

Hank Oswald
Licensed Environmental Health Specialist
Howard County Health Department
Bureau of Environmental Health
Well & Septic Program
8930 Stanford Boulevard
Columbia, MD 21045
410.313.1786 (Office)
hoswald@howardcountymd.gov



CONFIDENTIALITY NOTICE

This message and the accompanying documents are intended only for the use of the individual or entity to which they are addressed and may contain information that is privileged, confidential, or exempt from disclosure under applicable law. If the reader of this email is not the intended recipient, you are hereby notified that you are strictly prohibited from reading, disseminating, distributing, or copying this communication. If you have received this email in error, please notify the sender immediately and destroy the original transmission.

LETTER OF TRANSMITTAL

AGENCY CLIENT FILE BILLING CORRESPONDANCE OTHER

VanMar Associates, Inc.

Engineers ~ Surveyors ~ Planners
310 South Main Street, P.O.Box 328, Mt. Airy, MD 21771
301-829-2890 301-831-5015 301-695-0600
410-549-2751 (FAX) 301-831-5603

TO: Howard County
Bureau of Environmental Health
8930 Stanford Blvd.
Columbia, MD 21045

ATTN: Hank Oswald

DATE: June 18, 2020
PROJECT: "Good Neighborhood"
Ewell Property

VMA#: A4-4821
COUNTY#:

ENCLOSED:

COPIES	DATE	DESCRIPTION
1	6/9/20	Emails between Hank Oswald & Ron Thompson
4	6/18/20	Site Plan for Bat Installation Lot 3 Ewell Property

REMARKS: Hi Hank, revised to reflect comments and submitted for your review and approval. Thank you!

COPIES TO (ADDRESS): Lee Stumpf, 3634 Ligon Road, Ellicott City, Maryland 21042

SUBMITTED BY: dkv

g:\engr\44821 hd revi bat plan 6.18.20

LETTER OF TRANSMITTAL

AGENCY CLIENT FILE BILLING CORRESPONDANCE OTHER

VanMar Associates, Inc.

Engineers ~ Surveyors ~ Planners
310 South Main Street, P.O.Box 328, Mt. Airy, MD 21771
301-829-2890 301-831-5015 301-695-0600
410-549-2751 (FAX) 301-831-5603

TO : Howard County
Bureau of Environmental Health
8930 Stanford Blvd
Columbia, MD 21045

Attn: Hank Oswald

DATE: June 4, 2020
PROJECT : Ewell Property
Lot 3

VMA# : A4-4821
COUNTY#

ENCLOSED:

COPIES	DATE	DESCRIPTION
1	1/27/20	Email Comments and Response
4	6/3/20	Site Plan for Bat Installation Lot 3, Ewell Property

REMARKS: Revised and submitted for your review and approval. Thank you.

COPIES TO (ADDRESS): Client: Lee Stumpf, 3634 Ligon Road, Ellicott City, Maryland 21042

SUBMITTED BY : dkv

g\enr\A44821 hd revised site plan 6.4.20

LETTER OF TRANSMITTAL

AGENCY CLIENT FILE BILLING CORRESPONDANCE OTHER

VanMar Associates, Inc.

Engineers ~ Surveyors ~ Planners
310 South Main Street, P.O.Box 328, Mt. Airy, MD 21771
301-829-2890 301-831-5015 301-695-0600
410-549-2751 (FAX) 301-831-5603

TO : Howard County
Bureau of Environmental Health
8930 Stanford Blvd.
Columbia, MD 21045

ATTN : Hank Oswald

DATE: June 24, 2020
PROJECT : "Good Neighborhood"
Ewell Property

VMA# : A4-4821
COUNTY#

ENCLOSED:

COPIES	DATE	DESCRIPTION
1	6/24/20	Emails between Hank Oswald & Ron Thompson
4	Revised 6/24/20	Site Plan for Bat Installation Lot 3 Ewell Property

REMARKS: Hi Hank, revised to reflect comments and submitted per email request for release of building permit.
Thank you so much for your help. Have a great day!

COPIES TO (ADDRESS): Lee Stumpf, 3634 Ligon Road, Ellicott City, Maryland 21042

SUBMITTED BY: dkv

g\engr\44821 hd revi Bat Plan for signature 6.24.20