

Bureau of Environmental Health
 8930 Stanford Boulevard, Columbia, MD 21045
 Main: 410-313-2640 | Fax: 410-313-2648
 TDD 410-313-2323 | Toll Free 1-866-313-6300
www.hchealth.org
 Facebook: www.facebook.com/hocohealth

Maura J. Rossman, M.D., Health Officer

RECEIPT DATE: 8/18/2025 **ONSITE SEWAGE DISPOSAL SYSTEM** P 589165

APPROVAL DATE: 9/12/2025 **PERMIT: REPAIR** A Repair

PROPERTY ADDRESS: 1681 Woodstock Road

SUBDIVISION: n/a LOT: n/a TAX ID: 03-287041

CONTRACTOR: Fogle's EMAIL: Jeff@foglesinc.com

CONTRACTOR ADDRESS: 580 Obrecht Road, Sykesville 21784 PHONE: 410-795-5670

PROPERTY OWNER: Laura Strauch EMAIL: fwstrauch@yahoo.com

OWNER ADDRESS: Same as above PHONE: 410-371-2381

SEPTIC TANK SIZE: Existing PUMP SIZE: n/a PUMP TANK CAPACITY: n/a

DISTRIBUTION SYSTEM: GRAVITY LPD BEDROOMS: 3 APPLICATION RATE: 1.2gpd/ft


TRENCHES:	LINEAR FEET REQUIRED: <u>70</u>	INLET DEPTH: <u>3</u>
	TRENCH WIDTH: <u>3</u>	MAXIMUM BOTTOM DEPTH: <u>7</u>
	MINIMUM SPACE BETWEEN TRENCHES: <u>n/a</u>	EFFECTIVE AREA BEGINNING DEPTH: <u>4.5 (.55)</u>
LOCATION:	SYSTEM STAKED BY INSTALLER/DESIGNER AND VERIFIED BY APPROVING AUTHORITY DURING PRE-CONSTRUCTION INSPECTION.	
NOTES:	Install system per approved design plans.	

ISSUED BY: Kevin M. Wolf, L.E.H.S. ISSUE DATE: 9/4/2025 EXPIRATION DATE: 9/4/2026

- NOTE: CONTRACTOR MUST SCHEDULE A PRE-CONSTRUCTION INSPECTION PRIOR TO BEGINNING ANY INSTALLATION
- NOTE: CONTRACTOR REGISTERED WITH THE STATE OF MD ON-SITE WASTEWATER PROFESSIONALS BOARD: CONFIRMED
- NOTE: CONTRACTOR MUST SCHEDULE AN INSPECTION AND GAIN APPROVAL OF ALL COMPONENTS PRIOR TO COVERING
- NOTE: STONE MUST BE APPROVED BY HEALTH DEPARTMENT AND GRAVEL TICKET MUST BE AVAILABLE FOR REVIEW.
- NOTE: WATERTIGHT SEPTIC TANKS REQUIRED
- NOTE: ALL PARTS OF SEPTIC SYSTEM SHALL BE AT LEAST 100 FEET DOWNGRADIENT FROM ANY WATER WELL
- NOTE: MANHOLE RISERS REQUIRED ON ALL SEPTIC TANKS AND PUMP CHAMBERS
- NOTE: AN ELECTRICAL PERMIT IS REQUIRED FOR INSTALLATION OF ANY ELECTRICAL COMPONENTS OF THE SYSTEM
 ELECTRICAL PERMIT ISSUED E n/a
- NOTE: THE HCHD DOES NOT WARRANTY ANY SYSTEM AND CANNOT GUARANTEE THE PERFORMANCE OF THIS SYSTEM AS DESIGNED. BY ACCEPTING THIS PERMIT, THE OWNER AND/OR APPLICANT ACKNOWLEDGE THAT THE SPECIFICATIONS DETAILED IN THIS DESIGN ARE ONE POSSIBLE OPTION AND THAT THE HCHD WILL REVIEW OTHER PROPOSALS. YOU HAVE THE OPTION TO SEEK THE ADVICE OF A QUALIFIED DESIGN CONSULTANT OR PROFESSIONAL ENGINEER FOR FURTHER GUIDANCE.
- NOTE: AN INDIVIDUAL CERTIFIED BY MDE AND THE MANUFACTURER FOR BAT INSTALLATION MUST BE PRESENT AT ALL TIMES DURING BAT INSTALLATION.
- NOTE: MDE RECOMMENDS SEPTIC TANKS, BAT, AND OTHER PRETREATMENT UNITS BE PUMPED AT A FREQUENCY ADEQUATE TO ENSURE THAT SOLIDS ARE NOT DISCHARGED TO THE DISPOSAL AREA

**NEITHER THE HOWARD COUNTY COUNCIL NOR THE HEALTH DEPARTMENT IS RESPONSIBLE FOR THE SUCCESSFUL OPERATION OF ANY SYSTEM.
 PERMITTEE RESPONSIBLE FOR OBTAINING FINAL APPROVAL ON THIS PERMIT.
 CALL 410-313-1771 TO SCHEDULE INSPECTIONS.**

NOT TO SCALE

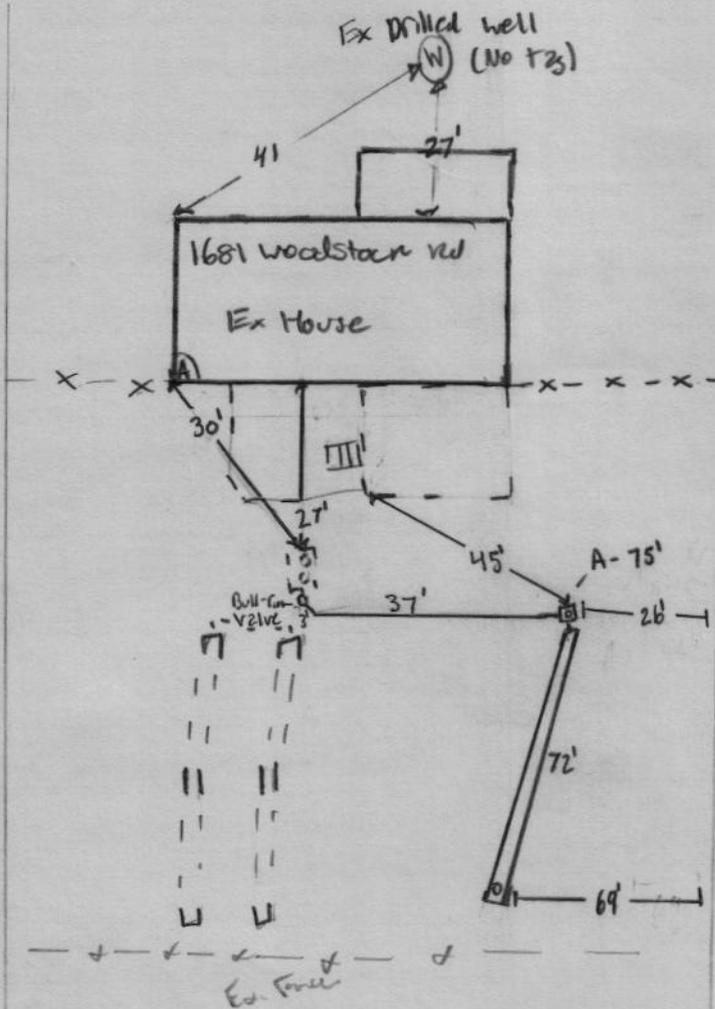

ROAD NAME

TRENCH/DRAINFIELD DATA

WIDTH	INLET	BOTTOM
3'	3'	7'
NUMBER OF TRENCHES <u>1</u>		
TOTAL LENGTH <u>72'</u>		
ABSORPTION AREA <u>216 Ft² + 8' W</u>		
DISTRIBUTION BOX LEVEL <u>---</u>		
DISTRIBUTION BOX BAFFLE <u>yes</u>		
DISTRIBUTION BOX PORT <u>yes</u>		

Existing

SEPTIC TANK DATA

SEPTIC TANK 1 LEVEL ---

MANUFACTURER ---

CAPACITY --- GAL

SEAM LOC ---

TANK LID DEPTH ---

BAFFLES ---

BAFFLE FILTER ---

MANHOLE LOC ---

6" PORT LOC ---

WATERTIGHT TEST ---

SLOTTED ---

DATE ON LID ---

PUMP/SEPTIC TANK LEVEL ---

MANUFACTURER ---

CAPACITY --- GAL

SEAM LOC ---

TANK LID DEPTH ---

BAFFLES ---

BAFFLE FILTER ---

MANHOLE LOC ---

6" PORT LOC ---

WATERTIGHT TEST ---

SLOTTED ---

DATE ON LID ---

SEPTIC CONTRACTOR ONSITE INSTALLING SYTEM: Mike Hooper

SEPTIC CONTRACTOR ONSITE LICENSED WITH THE STATE OF MD: YES/NO

PRE-CONSTRUCTION NOTES:

9/4/2025 - Design Plan Approved KW

CONTROL PANEL DATA

CONTROL PANEL HEIGHT ---

(MIN 30") ---

INSPECTION DATE ---

INSPECTION: PASS/FAIL (CIRCLE ONE)

INSTALLATION NOTES:

9/12/2025 - Installer onsite for inspection. Ball cou valve installed after trench. valve going to new trench. Adjust the fill to new d-box. 2' but has baffle, connected to the 1 new trench. Trench length @ 72', inlet @ 2.5' - 3', stone & p2bz on, obs port @ end of trench. OK to BREC/SU all work. (SP)

FINAL INSPECTOR S. Page

DATE OF APPROVAL 9/12/2025



Approved Septic System Plan
Howard County Health Department

[Signature] 9/4/2025
Signature Date

Septic Repair Design Plan

Designer & Installer Info		Property Info	Owner Info	Additional Info		
	Installer: Fogle's Septic Clean, Inc Address: 580 Obrecht Rd Sykesville, MD 21784	Designer: John Hieatzman Phone: 410-795-5670 Email: john@foglesinc.com	Address: 1681 Woodstock Rd Woodstock, MD 21163	Name: Fred Strauch Phone: 410-371-2381 Email: fwstrauch@yahoo.com	Perc Date: 7/29/25 Permit No.: P589118 (Perc) Bedrooms: 3	Version: 1.0 Date: Job No.: 919



Date: 7/29/25 Time: 10:00 AM
Job Name: Fred Strauch
Address: 1681 Woodstock Rd
Woodstock, MD 21163
Phone #: 410-371-2381
Permit #: P589118 (Perc) Job #: 919
Number of Bedrooms: 3
Start time: 10:30

End time: 11:45

Total Holes: 1

Passing Holes: 1

Failing Holes: 0

Confirmed

Yes

Left Message

Sent Email

Job Type: **Perc Repair**

Ms Utility: 25464958 valid 7/15/25 - 7/30/25

Ms Utility: _____

Fogle's Operator: Mike

County Sanitarian: Kevin Wolf

Engineer: _____

Notes: _____

Septic Design Info

Trench Info

Num. of Trenches: _____ Staked: Yes No

Total Trench Length: 70

Trench Width: 3

Trench Depth: 7

Stone Depth (below pipe): 4

D-box: 5 hole D-box Riser Length: 2

Tank Info

Keep existing _____ gallon tank

Existing tank has manhole riser

Install/replace riser and manhole lid on existing tank

_____ ft of manhole riser _____ lid(s)

Install new _____ gallon tank

_____ ft of manhole riser _____ lid(s)

Install new _____ gallon pump chamber

_____ ft of manhole riser _____ lid(s)

Pipe Info

80 ft of 4" sch. PVC Pipe

_____ ft of 2" sch. PVC Pipe

_____ ft of 6" sch. PVC Pipe

3 10965
of
stone

Abandonment Info

Abandon existing drainfields in place

Pump, crush and backfill existing drywell(s)

Pump, crush and backfill existing septic tank

Install bullrun valve to rest existing trenches/drywell

Additional Notes: _____

Will need mats to come off driveway

with dump trucks. ~~stone~~ will need pumped



HOWARD COUNTY HEALTH DEPARTMENT

89165

CODES

DATE

8/18/25

CASH

CHECK

NO.

81969

Received
From

Forbes Septic (Near) Inc. IC

For

OS/S Repair 11/81 Woodstock KS

Two hundred sixty five

Dollars

00/100

\$

265.00

Received By

[Handwritten Signature]