

PERMIT

SEWAGE DISPOSAL SYSTEM

DEPARTMENT OF HEALTH AND MENTAL HYGIENE

50227H
50220-A

P 50227H
Repair
A 14471

HOWARD COUNTY HEALTH DEPARTMENT

BUREAU OF ENVIRONMENTAL HEALTH

~~461-9933~~ 313-2640

DISTRICT 3rd

DATE 8-22-94
~~AD EEE RECEIVED~~

DATE SYSTEM APPROVED 4-12-96

INSPECTOR ALM

INDEXED

Jack Fyock Septic Service

IS PERMITTED TO INSTALL ALTER X

ADDRESS _____ PHONE 988-9270

SUBDIVISION Shepherds Glen LOT "B" ROAD 3925 Walt Ann Road

PROPERTY OWNER Andre G. Fontaine

ADDRESS _____

SEPTIC TANK CAPACITY _____ GALLONS

NUMBER OF BEDROOMS _____

_____ SQUARE FEET PER BEDROOM

LINEAR FEET OF TRENCH REQUIRED _____

LOCATION - Call for inspection when house connection and connection into existing septic line are made. 3/21/96 OK RM

PLANS APPROVED BY Amy McMillen DATE 03/08/96

COVER NO WORK UNTIL INSPECTED AND APPROVED

NEITHER THE HOWARD COUNTY COUNCIL NOR THE HEALTH DEPARTMENT IS RESPONSIBLE FOR THE SUCCESSFUL OPERATION OF ANY SYSTEM

NOTE: CLEANOUT REQUIRED EVERY 70 FEET OF SEWER LINE AND/OR AT 90° SWEEPS IN LINES FROM HOUSE TO DRAIN FIELDS, 90° ELBOWS NOT ACCEPTABLE.

NOTE: ALL PARTS OF SEPTIC SYSTEMS (I.E. TANK, DISTRIBUTION BOX TRENCHES) TO BE 100 FEET FROM WELL (UNLESS OTHERWISE SPECIFICALLY AUTHORIZED)

NOTE: IF DEEP TRENCH(ES) ARE USED CALL FOR INSPECTION BEFORE AND AFTER PLACING GRAVEL IN TRENCH(ES)

NOTE: NO DRY WELL SHALL EXCEED 15 FOOT IN DIAMETER NO ABSORPTION TRENCH TO EXCEED 100 FEET IN LENGTH

NOTE: ALL PIPE FROM HOUSE TO SEPTIC TANK MUST BE CAST IRON OR SCHEDULE 35/40 PVC OR ABS


PERMIT VOID AFTER TWO YEARS

NOTE: INSTALL STAND PIPE ON SEPTIC TANK AND DRY WELL STAND PIPES MUST BE 6 INCHES IN DIAMETER CAST IRON, CONCRETE OR TERRA COTTA OR PVA OR ABS ACCEPTED. IF TOP OF SEPTIC TANK IS DEEPER THAN 3 FEET. MANHOLE TO GRADE REQUIRED.

NOTE: DISTRIBUTION BOXES MUST HAVE BAFFLES

***INSTALLER IS RESPONSIBLE FOR OBTAINING FINAL APPROVAL ON THIS PERMIT**

R 50227H

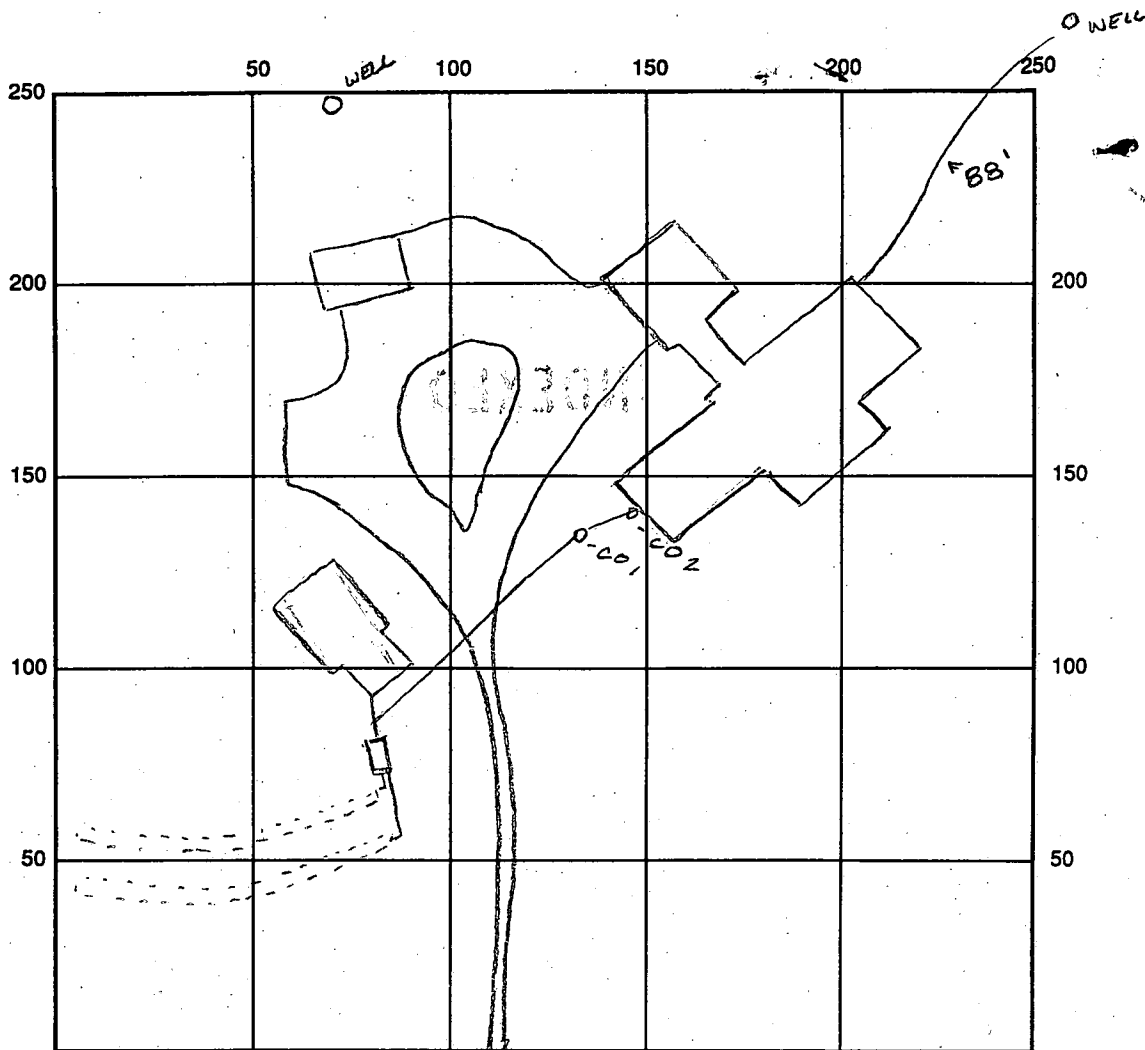

INDICATE NORTH - NAME ADJOINING ROADWAY AS BASE LINE

SEPTIC TANK LEVEL _____

CLEANOUTS #1 & #2 OK

DISTRIBUTION BOX LEVEL _____

DRAIN FIELD/TITLE DEPTH _____ FT. TRENCH WIDTH _____ FT. INLET DEPTH _____ FT.

EFFECTIVE GRAVEL DEPTH _____ FT. TOTAL LENGTH _____ FT.

NUMBER OF TRENCHES _____ ONE SIDEWALL/BOTTOM AREA _____ SQ. FT.

DRYWALL INSIDE DIAMETER _____ FT. EFFECTIVE DEPTH BELOW INLET _____ FT.

ABSORBENT AREA _____ SQ. FT.

REMARKS: 4-12-96 House connection and connection into existing septic system OK AWM

DATE SYSTEM APPROVED 4/12/96 INSPECTOR A. McMillan

WPI - ASBP
7/17/85
7-10-85 approved
7/10/85 ASBP

PERMIT

SEWAGE DISPOSAL SYSTEM

MARYLAND STATE DEPARTMENT OF HEALTH

HOWARD COUNTY
BUREAU OF ENVIRONMENTAL HEALTH

992-2330

461-9933

INDEXED

ELLICOTT CITY

DISTRICT 3rd

DATE 6/13/85

Fogle Septic Service

~~Robert L. Orendorf, Jr.~~

IS PERMITTED TO INSTALL X ALTER

ADDRESS 7469 Flamewood Drive, Clarksville, MD 21029 PHONE 776-0444

SUBDIVISION Shepherds Glen ROAD 3925 Old Rolling LOT "B"

PROPERTY OWNER Andre G. Fontaine,

9477 Wandering Way

ADDRESS Columbia, Maryland 21045

IF GARBAGE GRINDER IS USED INCREASE SEPTIC TANK CAPACITY BY 50% AND ABSORPTION AREA BY 22%.

GARBAGE GRINDER? YES _____ NO X

SEPTIC TANK CAPACITY 1250 GALLONS NUMBER OF BEDROOMS 4

TRENCHES - 150 sq. ft. per bedroom. Trench to be 2 feet wide. Inlet 3 feet below original grade. Bottom maximum depth 8 feet below original grade. Effective area begins at 3 feet below original grade. 5 feet of stone below distribution pipe. LOCATION: Start the first trench or locate the drywell 220 feet from the front lot line and 100 feet from the left sideline as seen when facing the lot from Old Rolling Road. Continue to dig the trench on level ground running more or less parallel to the front lot line. Place the second trench parallel to and 10 feet away from the first trench. NOTE: no trench to exceed 100 feet in length. If more than one trench used, a distribution box is required. Trenches to be installed on level ground. Call for inspection of trench before and after gravel is installed. Provide 6" - 8" diameter cleanout and cap to grade or above on septic tank.

OVERSIZED SYSTEM REQUESTED TO ALLOW FUTURE EXPANSION. 6/20/85

PLANS APPROVED BY Frank Skinner

DATE 6/13/85

COVER NO WORK UNTIL INSPECTED AND APPROVED.

NEITHER THE HOWARD COUNTY COUNCIL NOR THE HEALTH DEPARTMENT IS RESPONSIBLE FOR THE SUCCESSFUL OPERATION OF ANY SYSTEM.

NOTE: IF TRENCH IS USED CALL FOR INSPECTION BEFORE AND AFTER PLACING GRAVEL IN TRENCH.

NOTE: NO DRY WELL SHALL EXCEED 15 FOOT IN DIAMETER. NO ABSORPTION TRENCH TO EXCEED 100 FEET IN LENGTH.

NOTE: ALL PIPE FROM HOUSE TO SEPTIC TANK MUST BE CAST IRON OR SCHEDULE 40 PVC OR ABS.

PERMIT VOID AFTER THREE YEARS.


NOTE: INSTALL STAND PIPE ON SEPTIC TANK AND DRY WELL. STAND PIPES MUST BE 6 INCHES IN DIAMETER. CAST IRON, CONCRETE OR TERRA COTTA, OR PVC OR ABS ACCEPTED. IF TOP OF SEPTIC TANK IS DEEPER THAN 3 FEET MANHOLE TO GRADE REQUIRED.

BLDG. PERMIT SIGNED
AND RETURNED 6/13/85
Serial # 65753 SF10

*INSTALLER IS RESPONSIBLE FOR OBTAINING FINAL APROVAL ON THIS PERMIT

*CALL 992-2330 FOR INSPECTION OF SEPTIC SYSTEMS.

EH - 2-1082

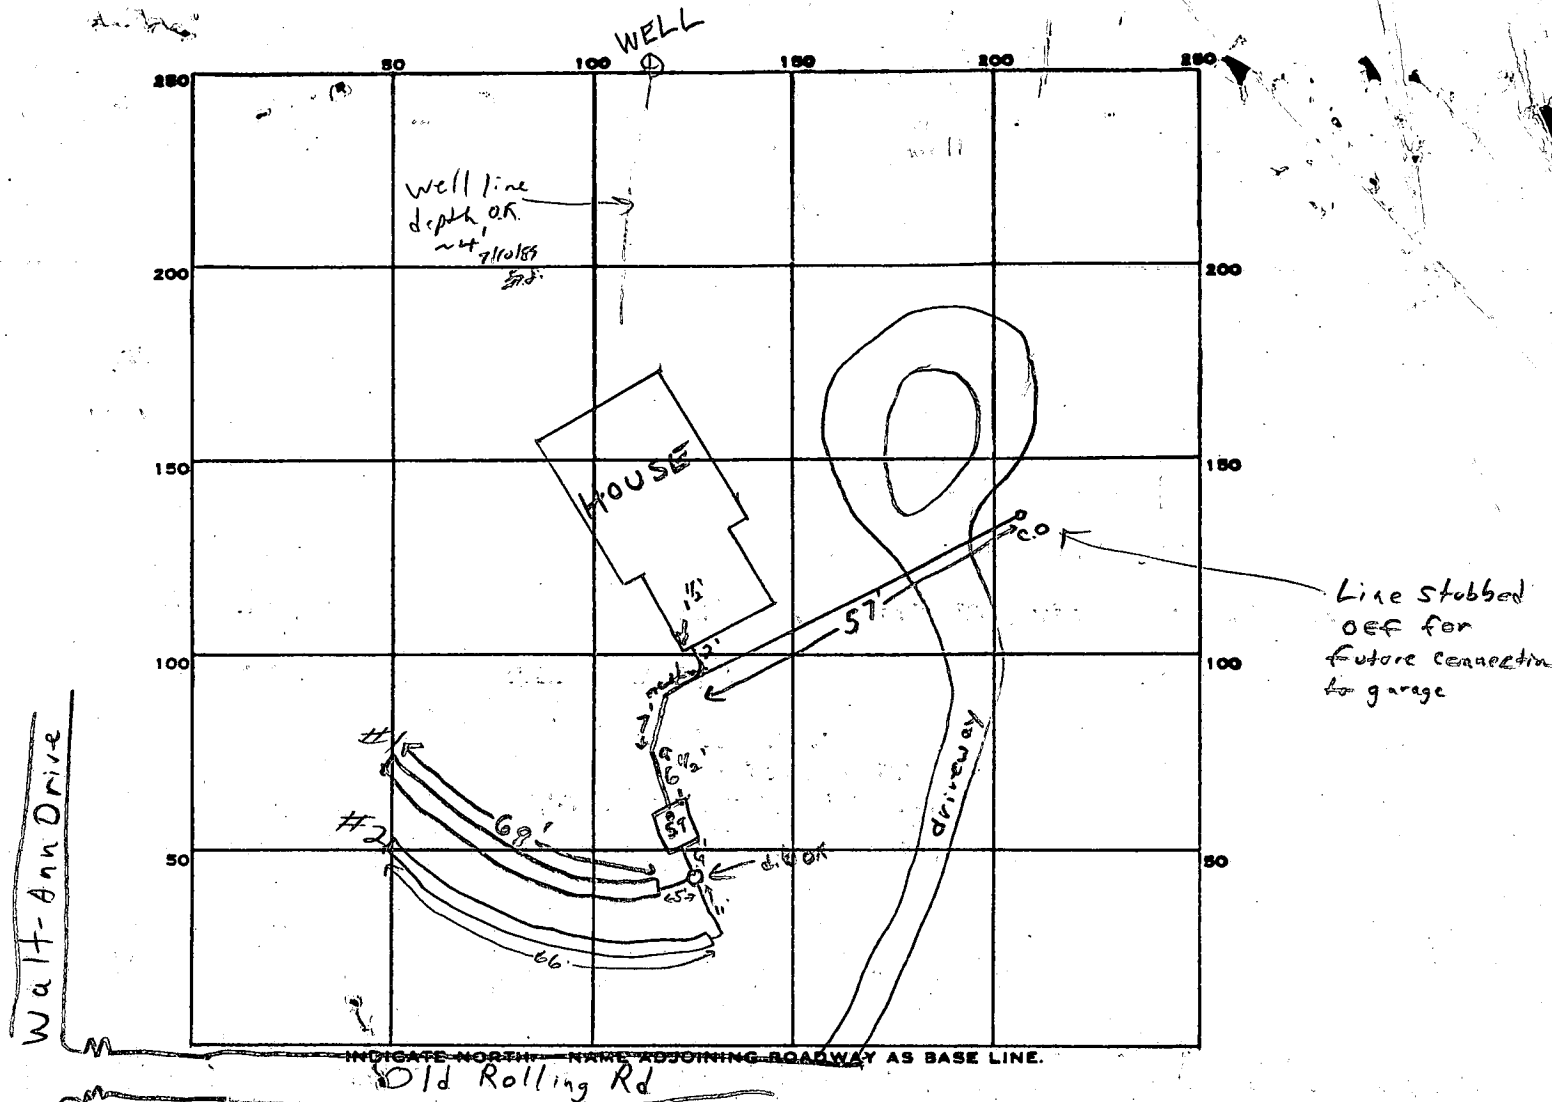

PERMIT CARD

SEPTIC TANK, LEVEL 1250 gal.

CLEANOUTS

S.T.

Future Connection

O.K.

O.K.

DISTRIBUTION BOX, LEVEL ✓

TILE FIELD, DEPTH 8 FT. TRENCH WIDTH 2 FT.

GRAVEL DEPTH 5 FT. TOTAL LENGTH 134 FT.

NUMBER OF TRENCHES 2

ONE SIDEWALL

TOTAL BOTTOM AREA

670

134
5
670

SEEPAGE PITS, INSIDE DIAMETER — FT. DEPTH BELOW INLET — FT.

ABSORBENT AREA ± 670 SQ. FT.

REMARKS 6-20-85 - OVERSIZED SYSTEM SPECIFIED TO ALLOW FUTURE EXPANSION. CW

7/10/85 O.K. to continue work on septic system. Well drilled in 1969 never grouted & has open annular space F.S. 7/10/85 O.K. to put gravel in #2 trench F.S.

DATE SYSTEM APPROVED

7-10-85

INSPECTOR

SAW

Howard County Health Department

To: ~~Inspector of CW~~

~~MR~~ Owner has old house ex. on lot & wants to rebuild on same lot & maintain old house as "associated structure". Old house has 1 BR, system installed for 4 BR, new house to have 2 BR. Said ~~he~~ he talked to F. Skinner 4 yrs ago, who agreed to allow hookup to new house

From: hookup to new house

Date: MR 3/26/90

HD-170

and maintain existing
hookup; You said he'd have
to disconnect. I Spoke to
Frank he said OK to
allow homeowner to
maintain orig house conn.

Fill out in triplicate.

Make \$15.00 check payable to
Howard County Health Dept. Sanitation

10/4/82 A.M.
9:30

APPLICATION

SEWAGE DISPOSAL TESTING

A 14471

P

MARYLAND STATE DEPARTMENT OF HEALTH

HOWARD COUNTY ~~Septic Tank to be 150 gal~~ ELLICOTT CITY

DISTRICT THIRD

DATE 4/29/69

5/1/69
9:30
Dry well to be 300 sq ft of asphalt
sidewall area below the inlet pipe maximum
depth of dry well to be 8 ft. Locate dry well 50 ft from
house and 36 ft from new drive way as house is
seen standing on old Rolling Rd facing lot

If trench only 105' long
@ 4 1/2 stone

Increase 500%
for disposal

TO: THE COUNTY HEALTH OFFICER
ELLICOTT CITY, MARYLAND

3 Bedrooms 1000 gal
4 Bedroom 1250 gal
5 Bedrooms 1500 gal Tank

I, HEREBY, APPLY FOR THE NECESSARY TESTS IN ORDER TO CONSTRUCT ~~OR RECONSTRUCT~~ A SEWAGE DISPOSAL SYSTEM.

PROPERTY OWNER DR. & MRS. ANTHONY YOUNG

ADDRESS 410 WESTSHIRE DR 21228 PHONE 747-4446

PROPERTY LOCATION: 1st dirt road on rite entering Shep 4th Glen from Folly, Okla. Rd.

SUBDIVISION SHEPHERDS GLEN LOT NO. "B"

ROAD AND DESCRIPTION OLD ROLLING RD

PARALLEL TO FOLLY QUARTER RD. EAST OF WALT-ANN

OCCUPANT NEW RESIDENCE PHONE

PERSON TO CONSTRUCT SYSTEM ROBERT DUBIN

ADDRESS CLARKSVILLE, HOWARD CO. PHONE 286-3432

SIZE OF LOT 5.0 ACRES TYPE BLDG. SINGLE RESIDENCE

IF NOT SINGLE RESIDENCE DESCRIBE SIX (6)

SIGNATURE OF APPLICANT Earle E. Crane LIT-CON INC.

APPROVED BY James T. Wright FOR Dry Well DATE 5/2/69

REJECTED BY FOR DATE

HOLD PENDING FURTHER TESTS DATE

REASONS FOR REJECTION OR HOLDING

THIS IS NOT A PERMIT

Hand-drawn map on a grid showing a parking area, a driveway, and a road layout. The map includes dimensions: 561.32' for the parking area, 36' for a horizontal distance, 50' for a vertical distance, 33' for a horizontal distance, and 350.00' for the total road length. A north arrow is present.

INDICATE NORTH. - NAME ADJOINING ROADWAY AS BASE LINE

old Rolling Road

DATE	TEST NO.	DEPTH	PRE-WET		TEST 1" DROP		TIME
			START	STOP	START	STOP	
5/21/69	1	11'	10 ¹⁶	10 ²⁰	10 ²⁰	10 ³²	12 min
	2	4'	10 ¹⁷	10 ¹⁹	10 ¹⁹	10 ³³	4 min
	3	11'	10 ²⁴	10 ²⁵	10 ³⁵	10 ³²	2 min
	4	4'	10 ³⁵	10 ³⁷	10 ³⁷	10 ⁴³	6 min
5-482	5	11'	VISUAL - MOSTLY SAND				

SOIL AUGER FINDING

TESTED BY

TESTED BY WWT - VISUAL^{OK} C. Williams 10-4-82

REMARKS

REMARKS: 10/15/82 Visual test hole on maximum depth of septic system bottom is 8 ft. below original grade ~~at~~ S.

APPLICATION

SEWAGE DISPOSAL TESTING

MARYLAND STATE DEPARTMENT OF HEALTH

HOWARD COUNTY

ELLICOTT CITY

DISTRICT THIRD

DATE 4/29/69

*Septic tank to be 750 gallon
dry well to be 300 sq ft of absorption
sidewall area below the inlet pipe maximum
depth of dry well to be 12 ft. Locate dry well 50 ft from
house and ~~at~~ 36 ft from new drive way as house is
seen standing on old Rolling Rd facing lot*

TO: THE COUNTY HEALTH OFFICER
ELLICOTT CITY, MARYLAND

I, HEREBY, APPLY FOR THE NECESSARY TESTS IN ORDER TO CONSTRUCT (OR RECONSTRUCT) A SEWAGE DISPOSAL SYSTEM.

PROPERTY OWNER DR. & MRS ANTHONY YOUNG

ADDRESS 410 WESTSHIRE DRIVE 21228 PHONE 747-4446

PROPERTY LOCATION:

SUBDIVISION SHEPHERDS GLEN

LOT NO. "B"

ROAD AND DESCRIPTION OLD ROLLING RD.

PARALLEL TO FOLY QUARTER RD. EAST OF WALT-ANN

OCCUPANT NEW RESIDENCE

PHONE

PERSON TO CONSTRUCT SYSTEM ROBERT DUBIN

ADDRESS CLARKSVILLE, HOWARD CO.

PHONE 286-3432

SIZE OF LOT 5.0 ACRES

TYPE BLDG. SINGLE RESIDENCE

IF NOT SINGLE RESIDENCE DESCRIBE SIX (6)
NUMBER OF BEDROOMS

SIGNATURE OF APPLICANT

Earle E Crane

LIT-CON INC.

APPROVED BY

James T. Wright

FOR

Dry Well
(KIND OF SYSTEM)

DATE

5/2/69

REJECTED BY

FOR

(KIND OF SYSTEM)


DATE

HOLD PENDING FURTHER TESTS

DATE

REASONS FOR REJECTION OR HOLDING

THIS IS NOT A PERMIT

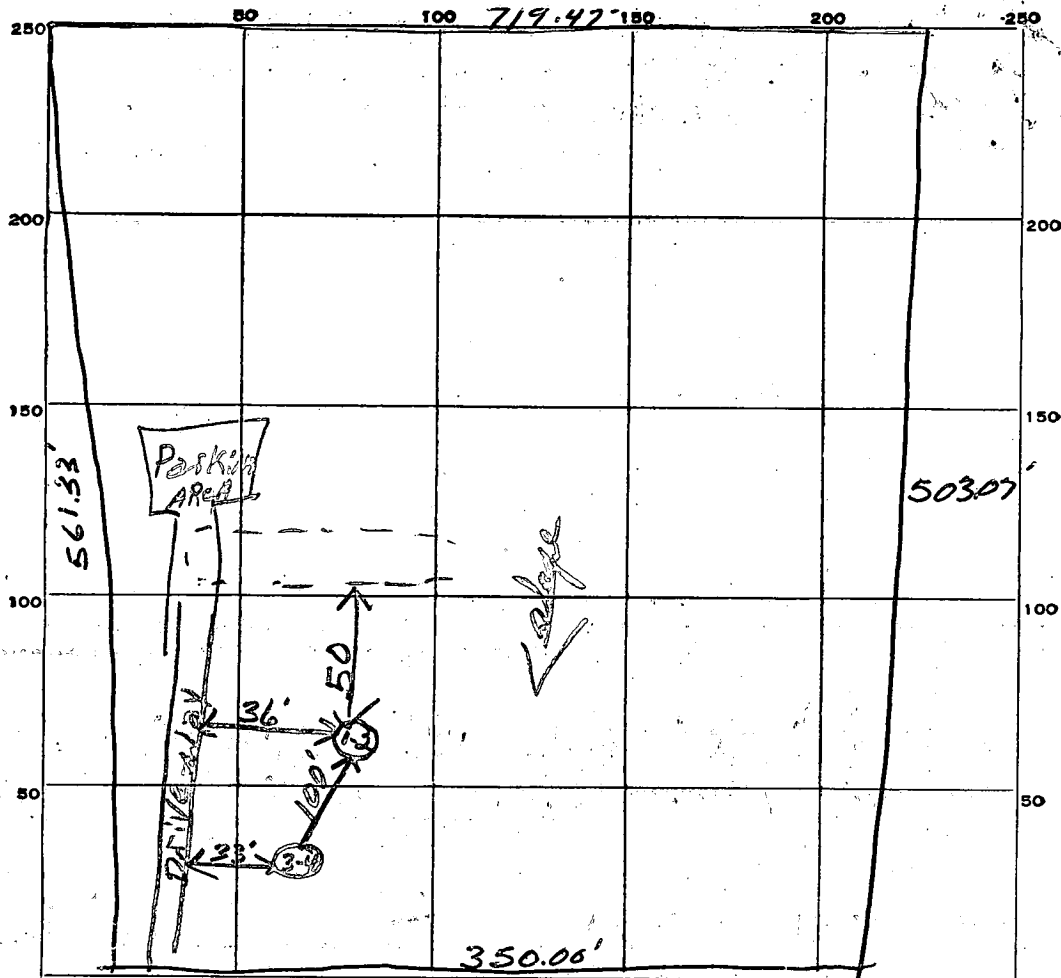

INDICATE NORTH. - NAME ADJOINING ROADWAY AS BASE LINE.

Old Rolling Road

DATE	TEST NO.	DEPTH	PRE-WET		TEST - 1" DROP		TIME
			START	STOP	START	STOP	
5/7/69	1	11'	10 ¹⁶	10 ²⁰	10 ²⁰	10 ³²	12 min
	2	4'	10 ¹⁷	10 ¹⁹	10 ¹⁹	10 ²³	4 min
	3	11'	10 ²⁴	10 ³⁵	10 ³⁵	10 ³⁷	2 min
	4	4	10 ³⁵	10 ³⁷	10 ³⁷	10 ⁴³	6 min

6
4124
6 min AU

SOIL AUGER FINDING

TESTED BY

REMARKS

**THIS REPORT
MUST BE SUBMITTED
WITHIN 30 DAYS
AFTER COMPLETION
OF THE WELL**

WELL COMPLETION REPORT

WELL DESCRIPTION

A

WELL LOG

State the kind of formations penetrated, their color, their depth, their thickness, and if water-bearing

7' Soil
Sandy
Sand Rock
mifel

water 80

FEET
from to0.3
3.30
30.60
60.360**B**

CASING AND SCREEN RECORD

State the kind and size and position of casing, liner, shoe, screen, and other accessories (if no casing used, give diameter of well).

Steel

DIAM.
(inches)

6

FEET
from to

0-40

Permit Number 70690196Owner Dr. Anthony YoungAddress Catonsville Md

Subdivision _____

Section _____ Lot _____

County Permit Number _____

PUMPING TEST

Hours Pumped 1Type of Pump Used air

Pumping Rate _____

Gallons per Minute 1/2

WATER LEVEL

(Distance from land surface to water)

Before Pumping 45 Ft.When Pumping 360 Ft.

APPEARANCE OF WATER

Clear _____ Cloudy _____

Taste _____

Odor _____

Height of Casing Above Land

Surface 2 Ft.

PUMP INSTALLED

Type _____

Capacity _____

Gallons per Minute _____

Gallons per Hour _____

Pump Column Length _____ Ft.


LOCATION OF WELL ON LOT

Show permanent structures such as building(s), septic tank, and/or other landmarks and indicate not less than 2 distances (measurements) to well.

NORTH

DATE
WELL WAS
COMPLETED

I hereby affirm that this report contains no willful misrepresentations or falsifications and that information given in this report is true, accurate and complete to the best of my knowledge and belief.

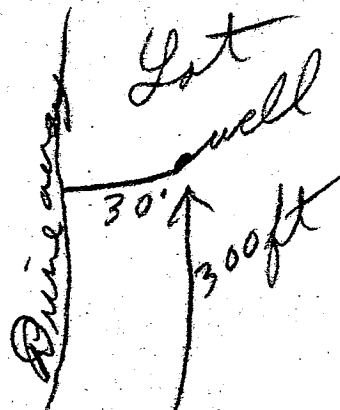J. J. Eastman, Well DrillerWell Driller License No.: 70May 30, 69

January 3, 1995

Howard County Health Department
Bureau of Environmental Health
3525-H Ellicott Mills Drive
Ellicott City, Maryland 21043

Attention: Ms Amy McMillen

Reference: Proposed residence
3925 Old Rolling Road, Shepherd's Glen, 3rd Election District
Howard County, Ellicott City, Maryland 21043


Dear Ms McMillen,

I appreciate your timely response today to our proposal and request of December 29, 1994. The following shall be as you requested and as I fully intended. Well #HO 69-0196 shall remain for the sole use and service of our current building which shall become our home occupation use. Well #HO 88-1262 shall serve our proposed residence exclusively. Their shall not be any cross connection between the two plumbing supply systems. I also understand that well #HO 88-1262 shall be tested for potability upon completion of the new plumbing system and prior to a use and occupancy permit being issued. Since you inform me that your timeframe for such tests does not often accommodate a normal move-in schedule, a test by a private company certified by the state is acceptable to your office. Since you also maintain a list of certified testing agencies, please forward in the enclosed postage paid return envelope a copy of the current list.

As you indicated, the current septic system is adequate to accommodate the proposed residence and our home occupation use. However, an additional septic tank would add additional life to the current absorption trenches but would not be a requirement for issuance of a building permit for our proposed new home.

Thank you again for your efforts and help.

Respectfully submitted,

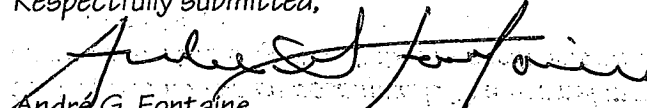

André G. Fontaine

P. O. Box 357, Glenelg, Maryland 21737

Daytime (410) 531-3925 Evenings (410) 997-2296

10/30/94

Andie has document

w/ 5 holes shown

10-4-82 Visual

4 holes 5-7-69 perc

will be
sending

12-29-94

Andre Fontain stopped in office.

I informed him of the problems that may arise - The need for a recorded 10,000ft² area & 2 septic tanks.

The 10,000ft² area shown on submitted plan he just drew up he doesn't know if it is recorded or not.

Am

11/22/94

Phone conversation w/
Andre Fontaine:

On property is a 1bdrm 600ft²
apt. w/ a septic system
for a 4 bedroom house.

There are 2 wells on the
property

wants to build a 3 bedroom
house on same prop &
hook into same system
Will be removing kitchen from
apt & zoning will be
requiring this.

CANNOT find file - Andre calling
back w/ well tag #'s

Told him to write a letter
explaining his intentions.

Amy McMiller

January 3, 1995

Andre Fontaine
P.O. Box 357
Glenelg, Maryland 21737

*not
sent resolved
in office - see back*

Re: Proposed residence
Shepherd's Glen
3925 Old Rolling Road
Ellicott City, Maryland 21043

Dear Mr. Andre Fontaine,

Your

On December 29, 1994 this office received a proposal to erect a 3 bedroom single family dwelling on the above referenced property. Currently there is a 1 bedroom home on the property on well and septic which is proposed to be converted for use as personal storage and home occupation. The proposal is to hook up this new residence to the existing septic system. There are currently 2 wells on the property (HO-69-0196 and HO-88-1262). It is proposed that HO-69-0196 be used for the 1 bedroom home and HO-88-1262 for the 3 bedroom home.

Review of our records indicates that the existing septic system was installed for a 4 bedroom home.

Sometime in 1985 to 1986, Frank Skinner of the Howard County Health Department agreed to allow the hook up of an additional 2 bedroom house to the existing septic system.

This office has the following concerns with the above referenced proposal:

1. Frank Skinner agreed to the hook-up of an additional 2 bedroom home, the proposal is for a 3 bedroom home.
2. Current preferred practices for a new single family dwelling are to have a recorded 10,000 square foot sewage disposal area for each dwelling unit on a property. At present there is no recorded sewage disposal easement.
3. Our records indicate that there were 2 percolation test holes dug on May 1969 and one visual hole on October 4, 1982. Due to the location of these test holes, approximately 50% of the sewage area shown on the current proposed plan has not been tested. (It would be preferred that this untested area be tested before the building permit approval.)
4. Our records indicate that well HO-69-0196 is dry. Current policy is that all original wells be abandoned as a condition for approval of a replacement well. Although this was not a requirement at the time of the issuance of replacement well permit HO-88-1262, HO-69-0196 should be abandoned.
5. This office has no record of any satisfactory water test results for well HO-88-1262. For future reference, a satisfactory water sample would be required for use and occupancy approval of the new home.

Please contact this office to further discuss the proposal at 313-2640.

1/3/95

meeting w/ FRANK Skinner:

- 1) Because septic capacity for a 4bdrm home put in- it is OK to connect new home to existing septic system (going will be requiring the removal of all kitchen equipment from existing 1bdrm home thus it will not be a SFD or apartment) No additional tank will be necessary for new home but it was suggested to A. Fontaine. ~~suggested~~
- 2) It is OK to keep ~~the~~

both wells. But before anything can be approved - Mr Andre Fontaine must send a written request to keep both wells and an assurance to this office that there will be separate plumbing and no cross connections.

Amy McMullen

Howard County Health Department

To:

FRANK

ANY HAS BEEN
TALKING TO A. FONTAINE
ABOUT A PROPOSED
ADDITION

THAT IS SIMILAR

TO ONE YOU^I DISCUSSED
WITH HIM SEVERAL YRS AGO.

WE'D LIKE TO DISCUSS IT WITH
YOU TO BE SURE OUR

From:

REACTION IS CONSISTENT

Date:

HD-170

WITH PAST CONTACTS

(CW)

1/3/95

December 29, 1994

Howard County Health Department
Bureau of Environmental Health
3525-H Ellicott Mills Drive
Ellicott City, Maryland 21043

Attention: Ms Amy McMillen

Reference: Proposed residence
3925 Old Rolling Road, Shepherd's Glen, 3rd Election District
Howard County, Ellicott City, Maryland 21043

Dear Ms McMillen,


We are via this submission applying for a building permit to construct a new three (3) Bedroom twenty-six hundred & forty-six square foot (2646 sf) residence at the above referenced address. It is our intention to allow the two existing buildings to remain. One is a garage and would remain as such. The other is the current seven hundred & thirty-five square foot (735 sf) one (1) bedroom residence that we would like to convert to a home occupation use and personal storage.

The current septic system has the capacity to accommodate four (4) bedrooms and therefore we feel that we would not be overtaxing this system, especially given the nature of home occupation use. (see septic disposal system permit #35638) Moreover, as you can see by the attached site plan the septic easement area could be increased if you found that to be necessary without encroaching on our existing wells nor the wells of our current neighbors. The current house does not have a garbage disposal and we are not contemplating a unit in the proposed residence. We shall also rework the existing Kitchen to eliminate any cooking facilities and thereby render this building uninhabitable as a full time residence in accordance with the Office of Planning & Zoning requirements.

Given that the well serving the existing house has a very low capacity, we would leave that well to serve that building and that building only. The proposed residence would be served by well # 88-1262 which meets the current standards.

If you have any questions or require additional information, please do not hesitate to contact us. I look forward to your positive response to our proposal and request.

Respectfully submitted,

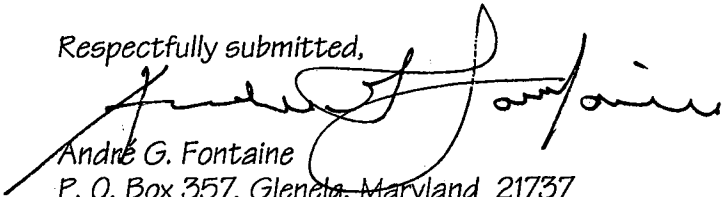

Andre G. Fontaine

P. O. Box 357, Glenelg, Maryland 21737

Daytime (410) 531-3925 Evenings (410) 997-2296

1 2 3 4 5 6
1508
(THIS NUMBER IS TO BE PUNCHED
IN COLS. 3-6 ON ALL CARDS)

ST/CO USE ONLY
DATE Received
DATE WELL COMPLETED
060870

STATE OF MARYLAND
WELL COMPLETION REPORT
FILL IN THIS FORM COMPLETELY
PLEASE PRINT OR TYPE

THIS REPORT MUST BE SUBMITTED WITHIN
45 DAYS AFTER WELL IS COMPLETED.

COUNTY
NUMBER A14471

PERMIT NO.
FROM "PERMIT TO DRILL WELL"
10/2/80 HD-88-1262

OWNER
STREET OR RFD
SUBDIVISION
SECTION
LOT

WELL LOG
Not required for driven wells
STATE THE KIND OF FORMATIONS
PENETRATED, THEIR COLOR, DEPTH,
THICKNESS AND IF WATER BEARING

DESCRIPTION (Use additional sheets if needed)	FEET FROM	TO	Check if water bearing
Top Soil	0	2	
Sandy	2	47	
Sandstone	47	58	✓
MICKA	58	65	
Sandstone	65	70	✓
MICKA	70	210	
White MICKA	210	214	✓
MICKA	214	305	

GROUTING RECORD
WELL HAS BEEN GROUTED
(Circle Appropriate Box)
TYPE OF GROUTING MATERIAL
CEMENT ☒ BENTONITE CLAY ☒
NO. OF BAGS NO. OF POUNDS
GALLONS OF WATER
DEPTH OF GROUT SEAL (to nearest foot)
from 0 ft. to 77 ft.
(enter 0 if from surface)

CASING RECORD
casing
types
insert
appropriate
code
below
STEEL ☒ CONCRETE ☒
PLASTIC ☒ OTHER ☒
MAIN CASING TYPE
Nominal diameter top (main) casing (nearest inch)
Total depth of main casing (nearest foot)
60 61 63 64 66 70

OTHER CASING (if used)
diameter inch
depth (feet) from to

SCREEN RECORD
screen type or open hole
insert appropriate code below
STEEL ☒ BRASS ☒ OPEN HOLE ☒
PLASTIC ☒ OTHER ☒

DEPTH (nearest ft.)
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100
SLOT SIZE 1 2 3
DIAMETER OF SCREEN (NEAREST INCH)

CIRCLE APPROPRIATE LETTER
A A WELL WAS ABANDONED AND SEALED WHEN THIS WELL WAS COMPLETED
E ELECTRIC LOG OBTAINED
P TEST WELL CONVERTED TO PRODUCTION WELL

I HEREBY CERTIFY THAT THIS WELL HAS BEEN CONSTRUCTED IN
ACCORDANCE WITH COMAR 26.04.04 "WELL CONSTRUCTION"
AND IN CONFORMANCE WITH ALL CONDITIONS STATED IN THE
ABOVE CAPTIONED PERMIT, AND THAT THE INFORMATION PRE-
SENTED HEREIN IS ACCURATE AND COMPLETE TO THE BEST OF
MY KNOWLEDGE.

DRILLERS IDENT. NO. 273
DRILLERS SIGNATURE
SITE SUPERVISOR (sign. of driller or journeyman responsible for sitework if different from permittee)

GRAVEL PACK
IF WELL DRILLED WAS
FLOWING WELL INSERT
F IN BOX 68
OEP USE ONLY
(NOT TO BE FILLED IN BY DRILLER)
TELESCOPE CASING
LOG INDICATOR
OTHER DATA

PUMPING TEST
HOURS PUMPED (nearest hour)
PUMPING RATE (gal. per min. to nearest gal.)
METHOD USED TO MEASURE PUMPING RATE
WATER LEVEL (distance from land surface)
BEFORE PUMPING
WHEN PUMPING
TYPE OF PUMP USED (for test)
A air P piston T turbine
C centrifugal R rotary O other (describe below)
J jet S submersible

PUMP INSTALLED
DRILLER WILL INSTALL PUMP YES NO
IF DRILLER INSTALLS PUMP, THIS SECTION
MUST BE COMPLETED FOR ALL WELLS
EXCEPT HOME USE
TYPE OF PUMP INSTALLED
PLACE (A,C,J,P,R,S,T,O)
IN BOX - SEE ABOVE:
CAPACITY:
GALLONS PER MINUTE (to nearest gallon)
PUMP HORSE POWER
PUMP COLUMN LENGTH (nearest ft.)
CASING HEIGHT (circle appropriate box and enter casing height)
above } LAND SURFACE
below } (nearest foot)

LOCATION OF WELL ON LOT
SHOW PERMANENT STRUCTURE SUCH AS
BUILDING, SEPTIC TANKS, AND/OR
LANDMARKS AND INDICATE NOT LESS
THAN TWO DISTANCES
(MEASUREMENTS TO WELL)
110' well

COUNTY

4/12/96
ASAP

HOWARD COUNTY HEALTH DEPARTMENT
Bureau of Environmental Health
3525-H Ellicott Mills Drive
Ellicott City, MD 21043
461-9933

APPLICATION FOR PITLESS ADAPTER, WELL PUMP AND PRESSURE TANK INSTALLATION

New Installation _____
Replacement _____

Receipt # _____
Date _____

Name of Installer _____

Telephone _____

License Number _____

Certified Well Pump Installer _____ Well Driller _____ Registered Plumber _____

Name of Property Owner Fontaine

Telephone _____

Subdivision _____ Lot # _____

Well Tag # _____

Site Address 3925 Walt Ann Drive

Pump

1. Type
a. Deep well jet _____
b. Shallow well jet _____
c. Submersible _____

2. Make _____

3. Model # _____

4. Capacity _____ GPM

5. Pump exceeds well capacity Yes _____ No _____

6. If Yes, is low pressure cutoff switch installed? Yes _____ No _____

7. What methods are used to protect the pump and electrical wiring from vibrations? Torque arrestors _____ Cable guards _____ Other _____

Motor

1. Horsepower _____

2. RPM _____

3. Voltage _____

a. 110 _____

b. 220 _____

Pitless Adapter

1. Make _____

2. Model # _____

3. Depth _____

Tank

1. Capacity _____

2. Pressure relief valve? _____

Piping

1. Type _____

2. Size _____

3. NSF and/or BOCA Code approved _____

4. Depth of supply line _____

Well data

1. Depth _____ ft.

2. Yield _____ GPM

3. Static water level _____ ft.

4. Will water supply be disinfected by installer? _____

4/12/96
WPI OK-OK
to cover AM


I understand that it is my responsibility to notify the Howard County Health Department when the installation is ready for inspection (otherwise this permit is null and void).

All information given above is true to the best of my knowledge.

Signature of Applicant: _____

Date: _____


Note: A sticker indicating approval/status of the installation will be placed on the well casing at the time of the inspection.

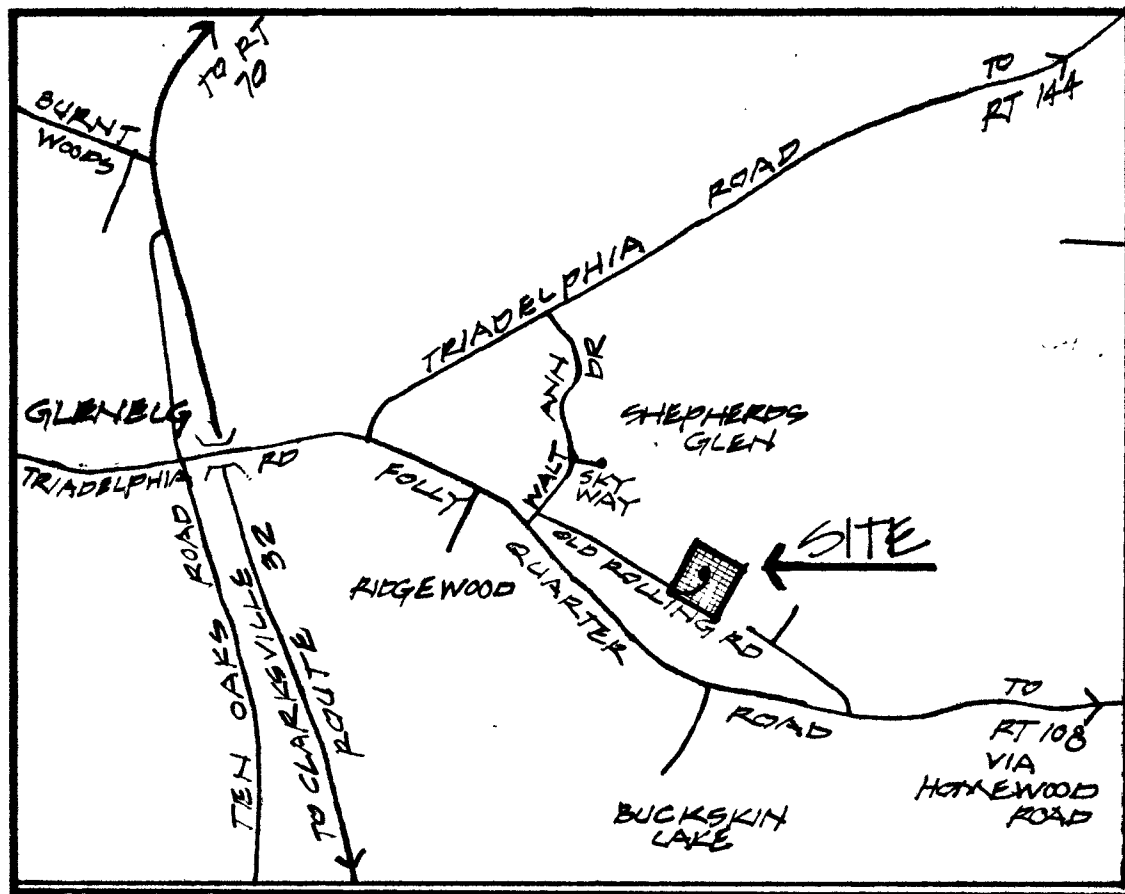

SITE LOCATION MAP

PROPOSED RESIDENCE FOR
STEPHANIE & ANDRE FONTAINE
HOWARD COUNTY ADC MAP BOOK
PG 10 BLOCK A ROW 11

ROCHELLE & ROBERT LUDICKI
3021 WALT ANN DRIVE
MAP 22 GRID 16 PCL 171
5.0 AC

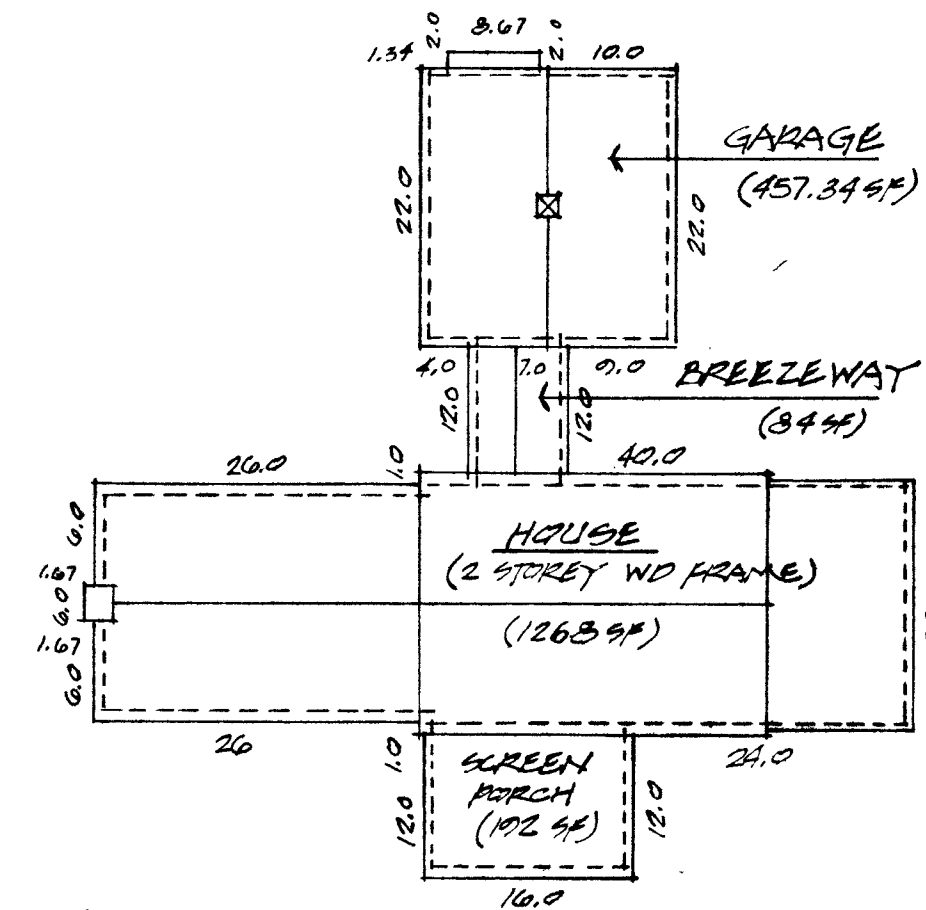


HOUSE FOOTPRINT

1" = 10'-0"
TOTAL LOT COVERAGE = 2030.30 SF
THIS BUILDING

BENCHMARK

ROSE ELLA & MICHAEL PICH
13200 SKYWAY
MAP 22 GRID 18 PCL 147
13.314 AC

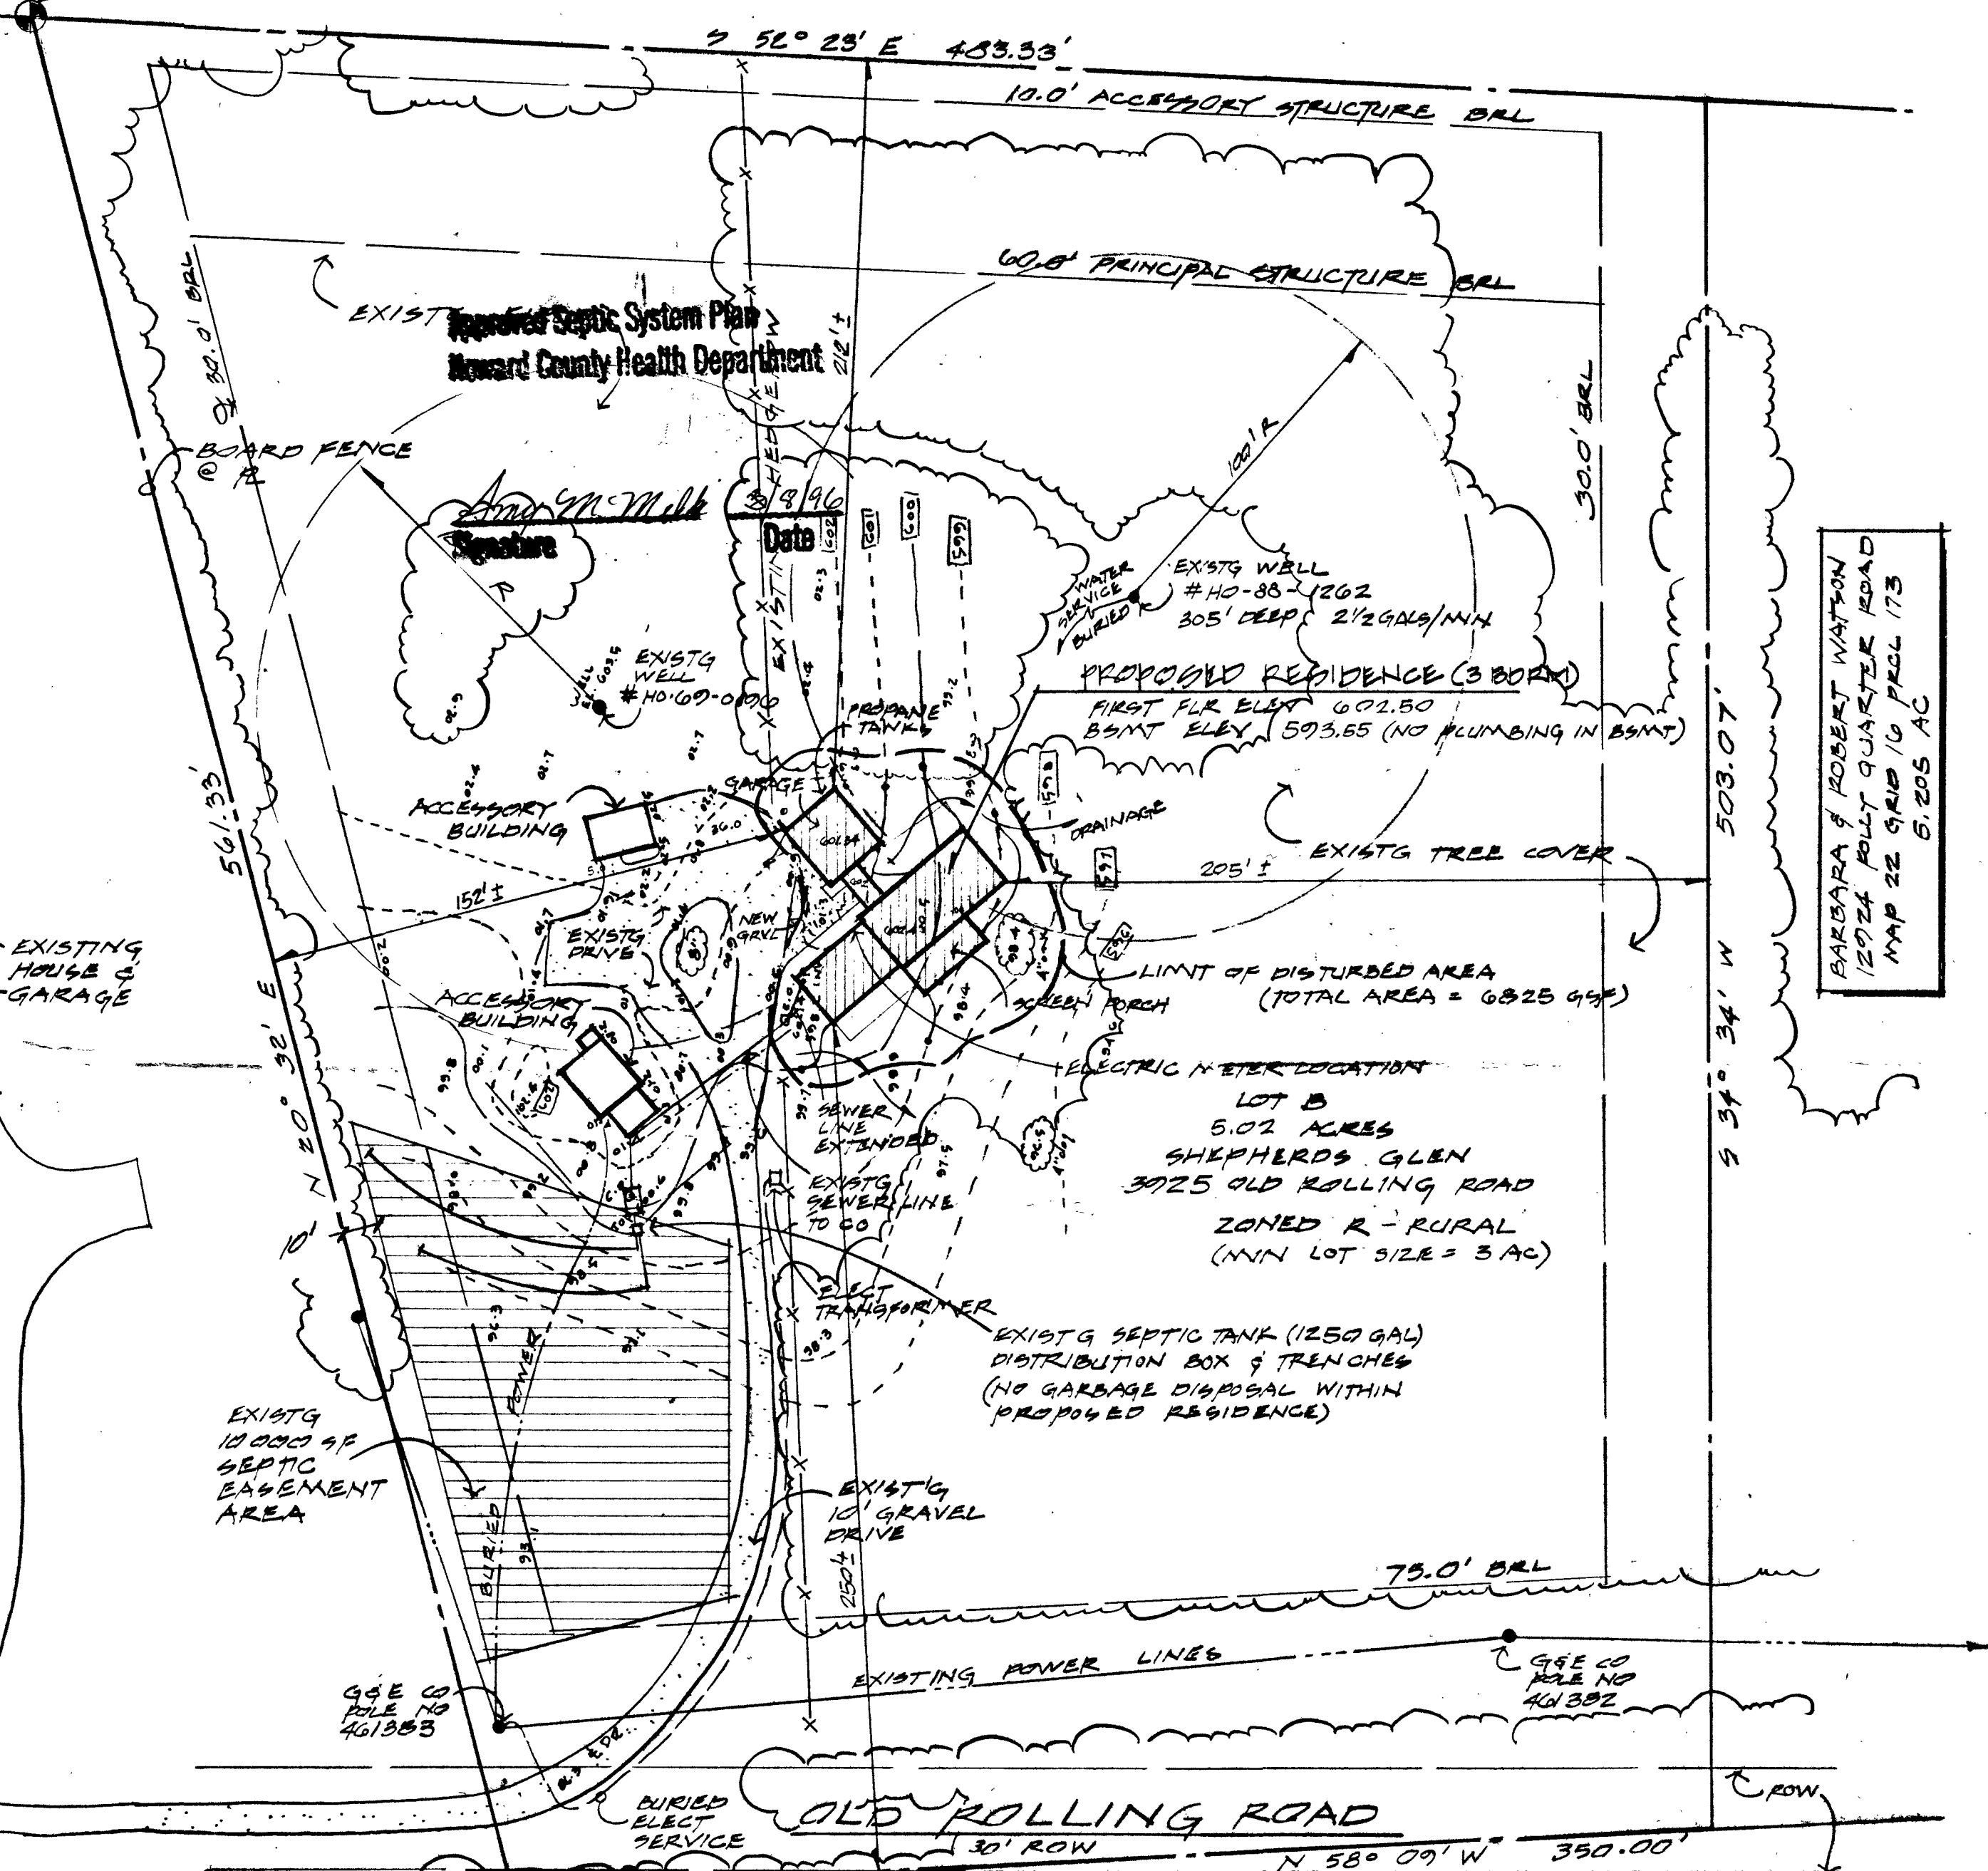

BARBARA & ROBERT WATSON
12924 POLLY QUARTER ROAD
MAP 22 GRID 16 PCL 173
6.205 AC

ELIZABETH & J. DAVID MULLINIX
POLLY QUARTER ROAD
MAP 22 GRID 16 PCL 73 LOT 1
5.783 AC

SITE PLAN

LOT B SHEPHERD'S GLEN
TAX MAP 22 BLOCK 16 PARCEL 17E
THIRD ELECTION DISTRICT
LIBER 1124 FOLIO 540 RECORDED 11/20/82

LOT COVERAGE ALLOWABLE 20%
LOT SIZE 218,733 SF X 20% = 43,747 SF
PROPOSED LOT COVERAGE
ACCESSORY BUILDINGS 245 SF
(EXISTING) 402
PROPOSED RESIDENCE 2040
PROPOSED COVERAGE 2687 SF
OR 1.22%

Andre G. Fontaine Architect
P.O. Box 357 - 3925 Old Rolling Road, Glenelg, Md. 21737
Baltimore 301-531-3925

PROPOSED RESIDENCE FOR
STEPHANIE & ANDRE G. FONTAINE
3025 OLD ROLLING RD. (WALT ANN DRIVE)
ELICOTT CITY, HOWARD CO., MD 21043